

Table of contents

1 General	17
Advantages of Bauer-Geared Motors	19
Bauer Gearmotors	19
Bauer Gearboxes	19
Bauer Motors	19
Bauer Brakes	19
2 Product Description	21
Selection of geared motors	23
Installed positions of geared motors	23
Notes on safety	23
Guards for rotating parts	23
Touch protection	23
Operating noise	23
Painting and corrosion protection	23
Modular system overview	24
3 Type Designations	27
Significance of type designation	29
BG-series helical/geared motor	30
BF-series shaft-mounted geared motor	31
BK-series bevel/geared motor	32
BS-series worm/geared motor	33
Codes for gear options	34
BG and BF series	34
BK and BS series	34
Motor	35
Three-phase motor	35
Motor protection	35
Brake rectifier in motor terminal box	35
Motor Mounted Components	36
Brake	36
Reverse rotation block	36
Digital and analogue encoder	36
Second shaft end	36
Forced ventilation	36
Overall design	36
4 Geared Motor Selection	37
Questionnaire for geared motor selection	39
Drive configuration	40
Drive configuration General	40
Required data for drive configuration	40
Determining the motor power	41
Determining the required torque	41
Determining the gear reduction ratio	41
Determining the factor of inertia	41
Determining the shock load	42
Determining the minimum service factor f_{Bmin}	42
Brake specification	42
Torque-speed characteristic	43
Dynamic power	44
Static power	44
Total power P_G	44
No-load cycle rate Z_0	45
Load factor K_L	45
Radial and axial forces on the output shaft	46

Energy Efficient Geared Motors

Table of contents

Radial and axial forces on the output shaft	46
Maximum allowable radial force at force application point X	46
Bearing load limit	46
Shaft strength	47
Helical gear unit BG series	47
Shaft-mounted gear unit BF series	48
Bevel gear unit BK series	49
Worm gear unit BS series	50
Transmission components	50
Factor f_z for the type of transmission component	51
Axial force	51
Sizing based on efficiency	52
Gear efficiency η_{gear}	52
System efficiency η_{system}	53
Shock loads of machinery	54
5 Gearboxes and Lubrication	57
Standard mounting positions	59
Position of the terminal box	61
Position of the terminal box and the cable entry points (BG and BF)	61
Position of the terminal box and the cable entry points (BK and BS)	62
Gearboxes	63
Radial and axial forces at the output shaft	63
Dimensions and fits of output shafts and keyways	63
Installing transmission elements	65
Gear with solid shaft	65
Gear with hollow shaft	65
Shrink disc coupling	65
Torque restraint	66
Notes for installing shaft mount gears with hollow shaft and keyway	66
Gear ventilation	66
Output shaft seals	66
Lubricants	67
Lubricants	67
Lubricant quantities	68
Lubricant quantities, BG-series gears	69
Lubricant quantities, BG20-01R	70
Lubricant quantities, BF-series gears	71
Lubricant quantities, BK-series gears	72
Lubricant quantities, BS-series gears	73
Lubricant quantities, pre-stage gears (Z)	74
Threaded plugs	75
Lubrication quantity for intermediate gear	75
Position of threaded plugs	76
-BG-series gears	76
-BG-20-01R	77
-BF-series gears	78
-BK-series gears	79
-BS-series gears	80
-pre-stage gears (Z)	81
-in the System Cover Design with Standard Geared Motor	82
-in the System Cover Design with foreign motor or gear design with input shaft	83
-in the System Cover Design with pre-stage Z	84
6 BG-series helical-gearred motors - Selection	85
Description of helical-gearred units	87
Sizes	87
Bauer service factors (f_B) for helical-gearred motors	87
Continuous operation without switching frequency $Z \leq 1/h$	87
Switching duty	87
Bauer service factor	87
Explanation of shock classification	88

Energy Efficient Geared Motors

Table of contents

Key to abbreviations	88
Selection tables, helical/geared motors	88
Selection helical/geared motors	89
7 BF-series shaft-mounted geared motors - Selection	145
Description of shaft-mounted gear units	147
Sizes	147
Bauer service factors (f_B) for shaft-mounted geared motors	147
Continuous operation without switching frequency $Z \leq 1/h$	147
Switching duty	147
Bauer service factor	147
Explanation of shock classification	148
Key to abbreviations	148
Selection tables, shaft-mounted geared motors	148
Selection - shaft-mounted geared motors	149
8 BK-series bevel-geared motors - Selection	193
Description of bevel-gear units	195
Sizes	195
Bauer service factors (f_B) for bevel-geared motors	195
Continuous operation without switching frequency $Z \leq 1/h$	195
Switching duty	195
Bauer Service factor	195
Explanation of shock classification	196
Key to abbreviations	196
Selection tables, bevel-geared motors	196
Selection - bevel geared motors	197
9 BS-series worm-geared motors - Selection	235
Description of worm-gear units	237
Sizes	237
Bauer service factors (f_B) for worm-geared motors	237
Continuous operation without switching frequency $Z \leq 1/h$	237
Switching duty	238
Ambient temperature	238
Bauer service factor	238
Explanation of shock classification	238
Key to abbreviations	239
Selection tables, worm-geared motors	239
Selection - worm-geared motors	240
10 BG-series helical-geared motors - Dimensions	261
Dimension-Standard Imperial.....	263
BG04	263
BG05	264
BG06	265
BG10 - BG10Z	266
BG10X - BG10XZ	268
BG15	271
BG20 - BG20Z	272
BG30 - BG30Z	274
BG40 - BG40Z	276
BG50 - BG50Z	278
BG60 - BG60Z	280
BG70 - BG70Z	282
BG80 - BG80Z	284
BG90 - BG90Z	286
BG100 - BG100Z	288
Dimension -Tandem Gearbox Imperial	291
BG06G04	291

Energy Efficient Geared Motors

Table of contents

BG10G06	292
BG10XG06	294
BG20G06	296
BG30G06	298
BG40G10	300
BG50G10	302
BG60G20	304
BG70G20	306
BG80G40	308
BG90G50	310
BG100G50	312
Dimension - Standard Metric	314
BG04	314
BG05	315
BG06	317
BG10 - BG10Z	318
BG10X - BG10XZ	320
BG15	323
BG20 - BG20Z	324
BG30 - BG30Z	326
BG40 - BG40Z	328
BG50 - BG50Z	330
BG60 - BG60Z	332
BG70 - BG70Z	334
BG80 - BG80Z	336
BG90 - BG90Z	338
BG100 - BG100Z	340
Dimension - Tandem Gearbox Metric	343
BG06G04	343
BG10G06	344
BG10XG06	346
BG20G06	348
BG30G06	350
BG40G10	352
BG50G10	354
BG60G20	356
BG70G20	358
BG80G40	360
BG90G50	362
BG100G50	364
11 BF-series shaft-mounted geared motors - Dimensions	367
Dimension - Standard Imperial	370
BF06	370
BF10 - BF10Z	372
BF20 - BF20Z	374
BF30 - BF30Z	376
BF40 - BF40Z	378
BF50 - BF50Z	380
BF60 - BF60Z	382
BF70 - BF70Z	384
BF80 - BF80Z	386
BF90 - BF90Z	388
Dimension -Tandem Gearbox Imperial	390
BF10G06	390
BF20G06	392
BF30G06	394
BF40G10	396
BF50G10	398
BF60G20	400
BF70G20	402
BF80G40	404
BF90G50	406

Energy Efficient Geared Motors

Table of contents

Additional Dimension Sheet Imperial.....	408
Shrink disc coupling (SSV)	408
Shrink disc coupling with (SSV) cover	409
Tapped holes side (H) → shaft cover	410
Rubber buffer for torque restraint	411
Assembly tools for hollow shaft and keyway.....	412
Sealing cap (VK)	414
Sealing cover (VD)	415
Dimension - Standard Metric.....	416
BF06	416
BF10 - BF10Z	418
BF20 - BF20Z	420
BF30 - BF30Z	422
BF40 - BF40Z	424
BF50 - BF50Z	426
BF60 - BF60Z	428
BF70 - BF70Z	430
BF80 - BF80Z	432
BF90 - BF90Z	434
Dimension - Tandem Gearbox Metric	436
BF10G06	436
BF20G06	438
BF30G06	440
BF40G10	442
BF50G10	444
BF60G20	446
BF70G20	448
BF80G40	450
BF90G50	452
Additional Dimension Sheet Metric	455
Splined shaft	455
Shrink disc coupling (SSV)	456
Shrink disc coupling with (SSV) cover	457
Tapped holes side (H) → shaft cover	458
Rubber buffer for torque restraint	459
Assembly tools for hollow shaft and keyway.....	460
Assembly tool for shaft mounted gears with splined shaft	462
Shaft cap (VK)	464
Shaft cover (VD)	465

12 BK-series bevel-gearred motors - Dimensions 467

Dimension - Standard Imperial.....	470
BK06	470
BK10 - BK10Z	472
BK20 - BK20Z	474
BK30 - BK30Z	476
BK40 - BK40Z	478
BK50 - BK50Z	480
BK60 - BK60Z	482
BK70 - BK70Z	484
BK80 - BK80Z	486
BK90 - BK90Z	488
Dimension -Tandem Gearbox Imperial	490
BK10G06	490
BK20G06	492
BK30G06	494
BK40G10	496
BK50G10	498
BK60G20	500
BK70G20	502
BK80G40	504
BK90G50	506

Energy Efficient Geared Motors

Table of contents

Additional Dimension Sheet Imperial	508
Shrink disk couplings (SSV)	508
Shrink disk connection with cover (SSV)	509
Rubber buffer for torque arm	510
Position of the torque arm	511
Foot with tapped holes.....	512
Foot plate with clearance holes	513
Assembly tools for hollow shaft and keyway	514
Shaft cap (VK)	516
Shaft cover (VD)	517
Dimension - Standard Metric.....	518
BK06	518
BK10 - BK10Z	520
BK20 - BK20Z	522
BK30 - BK30Z	524
BK40 - BK40Z	526
BK50 - BK50Z	528
BK60 - BK60Z	530
BK70 - BK70Z	532
BK80 - BK80Z	534
BK90 - BK90Z	536
Dimension - Tandem Gearbox Metric	538
BK10G06	538
BK20G06	540
BK30G06	542
BK40G10	544
BK50G10	546
BK60G20	548
BK70G20	550
BK80G40	552
BK90G50	554
Additional Dimension Sheet Metric	557
Splined shaft	557
Shrink disc coupling (SSV)	558
Shrink disc connection with cover (SSV)	559
Rubber buffer for torque arm	560
Position of the torque arm	561
Foot with tapped holes	562
Foot plate with clearance holes	563
Assembly tools for hollow shaft and keyway	564
Assembly tools for splined shaft	566
Shaft cap (VK)	568
Shaft cover (VD)	569
13 BS-series worm-geared motors - Dimensions	571
Dimension - Standard Imperial.....	574
BS02	574
BS03	576
BS04	578
BS06	580
BS10 - BS10Z	582
BS20 - BS20Z	584
BS30 - BS30Z	586
BS40 - BS40Z	588
Dimension - Tandem Gearbox Imperial	590
BS06G04	590
BS10G06	592
BS20G06	594
BS30G06	596
BS40G10	598
Additional Dimension Sheet Imperial	600
Shrink disc couplings (SSV)	600
Shrink disc couplings with (SSV) cover	601

Energy Efficient Geared Motors

Table of contents

Rubber buffer for torque restraint	602
Position of the torque arm	603
Threaded foot	604
Foot plate, left	605
Assembly tools for hollow shaft and keyway	606
Shaft cap (VK)	608
Shaft cover (VD)	609
Dimension - Standard Metric.....	610
BS02	610
BS03	612
BS04	614
BS06	616
BS10 - BS10Z	618
BS20 - BS20Z	620
BS30 - BS30Z	622
BS40 - BS40Z	624
Dimension - Tandem Gearbox Metric	626
BS06G04	626
BS10G06	628
BS20G06	630
BS30G06	632
BS40G10	634
Additional Dimension Sheet Metric	636
Shrink disc coupling (SSV)	636
Shrink disc coupling with (SSV) cover	637
Rubber buffer for torque arm	638
Position of the torque arm	639
Threaded foot	640
Foot plate, left	641
Assembly tools for hollow shaft and keyway	642
Shaft cap (VK)	644
Shaft cover (VD)	645

14 Motors

647

General	648
ErP Directive 2009/125/EC	649
Regulation (EU) 2019/1781	650
Torques	652
Line voltages	652
Line frequencies	653
Rating plate	653
Terminal box	653
Plug-and-socket connection	655
Motor protection	656
Thermistors (PTC)	656
Thermostatic protection	657
KTY sensors	658
PT100 sensors	659
Insulation	660
IP – Protection classes	660
Degrees of protection provided by enclosures for electrical equipment	660
Speed of output shaft	661
Duty types as defined by EN 60034	662
General	662
Continuous running duty (S1)	662
Short-time duty (S2)	662
Intermittent periodic duty (S3)	663
Intermittent periodic duty with starting (S4)	664
Intermittent periodic duty with electric braking (S5)	665
Continuous-operation periodic duty (S6)	666
Continuous-operation periodic duty with electric braking (S7)	666
Continuous-operation periodic duty with relative load/speed changes (S8)	667
Duty with non-periodic load and speed variations (S9)	667

Energy Efficient Geared Motors

Table of contents

Duty with discreet constant loads and speeds (S10)	668
Technical data of the 60 Hz motors	669
4-pole TEFC motors for continuous running duty S1 and 60 Hz mains frequency (Y/D)	669
4-pole TEFC motors for continuous running duty S1 and 60 Hz mains frequency (D/DD)	670
4-pole motors for intermittent periodic duty (S3/S6) and 60 Hz mains frequency	671
Operation with frequency converter	672
Motor torques for frequency-converter range 5 Hz - 80 Hz, line frequency 60 Hz / Imperial	672
Motor torques for frequency-converter range 5 Hz - 80 Hz, line frequency 60 Hz / Metric	673
Motor torques for frequency-converter range 5 Hz - 120 Hz, line frequency 60 Hz / Imperial	674
Motor torques for frequency-converter range 5 Hz - 120 Hz, line frequency 60 Hz / Metric	675
Notes on design	676
Increased torque with reduced duty factor	676
Increased torque with external fan	676
15 Motor-mounted components	677
Brake	679
Functional description	679
Product description of type ES(X) spring-actuated brakes	679
Product description of type ZS(X) spring-actuated brakes	680
Brake selection and sizing	681
Electrical connection	684
Specifications of holding brakes with emergency stop capability	687
Specifications of working brakes	688
Connection	690
DC connection via terminals (K)	690
Standard rectifier (S)	691
Rectifier for electronic rapid shutdown (E)	692
Standard rectifier (M)	693
Brake connection, operation with frequency converter	695
Brake connection, pole-changing motors	695
Manual release (HA, HN)	695
Explosion protection	695
Back stop (RR, RL)	695
Second motor extension (ZW, ZV)	695
Protective fan cowl (D)	695
Motor-independent fan (FV)	695
Technical Data Motor-independent fan	696
Encoder System	697
Heavy cast fan impeller	697
Shaft encoder (G)	697
Classification, motors and cast-iron fan impeller	697
Incremental rotary encoder	698
Functional description	698
Electrical specifications	698
Plug end view with male pin insert	698
Signal assignments	698
Absolute rotary encoders	699
Functional description	699
Profibus DP interface	699
SSI interface	700
Modular Motorsystem	701
Motor and encoder	701
Motor, brake and encoder	701
Motor and forced ventilation	701
16 Motor-mounted components	703
Dimensional Drawings Imperial	705
Standard terminal box	705
Terminal box for plug-connector	706
Standard brake	707
"Heavy-Duty" - brake	708
Motor with back stop	709

Energy Efficient Geared Motors

Table of contents

Motor with protective hood	710
Motor with independent fan.....	711
Motor with brake and independent fan	712
Motor with encoder with built-on independent fan	713
Motor with brake and encoder with built-on independent fan	714
Motor with encoder	715
Motor with "heavy duty" encoder	716
Motor with brake and encoder	717
Motor with "heavy duty" brake and encoder	718
Dimensional Drawings Metric	719
Standard terminal box	719
Terminal box for plug-connector	720
Standard brake	721
"Heavy-Duty" - brake	722
Motor with back stop	723
Motor with second shaft end	724
Motor with brake and second shaft end	725
Motor with protective hood	726
Motor with independent fan.....	727
Motor with brake and independent fan	728
Motor with encoder with built-on independent fan	729
Motor with brake and encoder with built-on independent fan	730
Motor with encoder	731
Motor with "heavy duty" encoder	732
Motor with brake and encoder	733
Motor with "heavy duty" brake and encoder	734
Motor in IEC design	735
17 Decentral Drive Technology	737
Electronics	739
EtaK2.0 geared motors	739
Efficient and ideal for distributed systems	739
Features of EtaK2.0 geared motors	739
Technical Data for EtaK2.0	740
Added benefits	740
Motor combinations	741
Dimensional drawing with attached EtaK2.0 inverter	742
Available accessories	743
USB diagnostic adapter	743
Handheld terminal	743
Switch potentiometer unit	744
Built-in potentiometer	744
Internal braking resistances	744
Setpoint potentiometer	745
Easy Starter	745
Braking operation with braking resistor	745
Supply for mechanical brake	745
Possible assemblies for EtaK2.0	746
18 BAUER global	747
North America	749
Latin America	750
Europe	751
Eastern Europe	754
Middle East & Africa	755
APAC	756
China	757

Energy Efficient Geared Motors

Bauer Gear Motor - profile

Innovation since 1927

During its 90-year history, Bauer Gear Motor has developed to become the preferred international provider of high-quality and extremely reliable geared motors. A great deal of knowledge has been accrued over the decades, and this has continually been built upon and shared. Bauer has pioneered many new geared motor solutions and will continue to do so in the future. Our engineers develop technically-advanced solutions that feature energy-efficient motors paired with optimal gearboxes so that we can offer our customers the lowest possible operating costs. It is not without reason that the Bauer brand has become world famous; this is because our geared motor solutions are the driving power in drive technology.



Competent and customer-focused


We see ourselves as the value adding partner for individual drive technology solutions along the entire customer value chain ... **Uncomplicated** ... **Competent** ... **Enduring**. With our global sales and expertise, we are there to support you side by side- right from the design of your drive. Our employees will ensure that you have the optimum geared motor solution for your application

Our quick response time to requests ensures that you receive the required offer within 24 hours. After your order has arrived, we check your order details and you will receive a confirmation of the order within 24 hours. This means that you will have the details for your own production planning process by the following day.

As we concentrate our production in regional factories, we are also able to deliver customised solutions from the factory reliably and directly, with an extremely short delivery period.

Energy Efficient Geared Motors

Bauer Gear Motor - profile

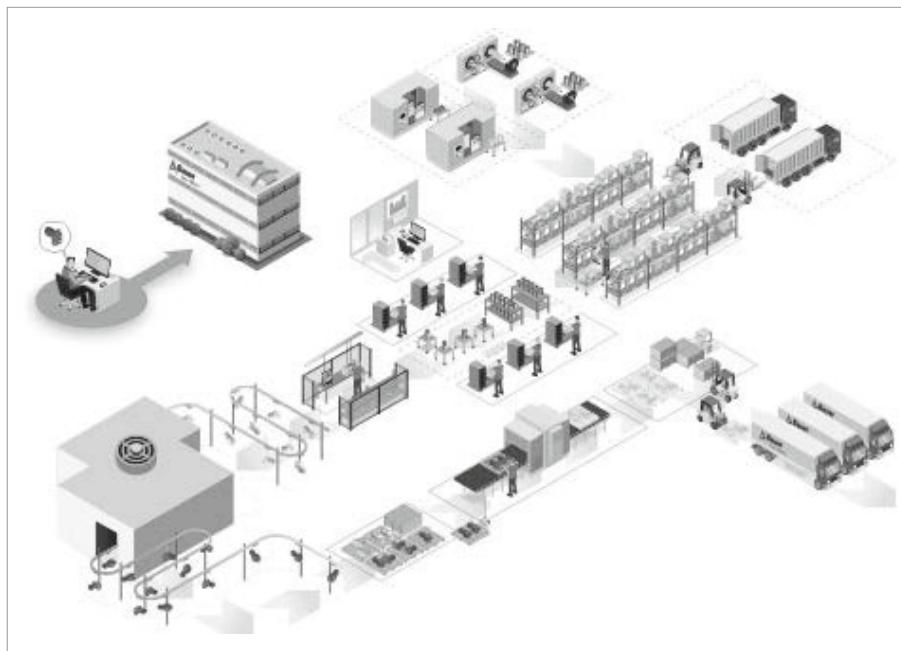

Closer to the customer's needs thanks to greater flexibility

Orders are processed immediately and passed on to our production team. By reducing set-up times, we are able to start producing the order specific parts right away. This is synchronised with assembly, ensuring that the parts are available according to just-in-time principles.

The entire manufacturing processes starting from the production of the motor, the mechanical geared motor parts and the electrical components, are perfectly coordinated to ensure greater process reliability and availability. This means that a high delivery reliability of over 95% can be achieved, while maintaining Bauer's high quality.

The product range



Energy Efficient Geared Motors

Bauer Gear Motor - profile

Helical Geared Motors

- Power range from 0.03 kW to 75 kW
- 13 gear sizes for torques ranging from 20 Nm to 18500 Nm
- New attachment possibilities with low design height
- High efficiency through 2-stage base design
- High protection rating of IP65 as standard

Shaft Mounted Geared Motors

- Power range from 0.03 kW to 75 kW
- 10 gear sizes for torques ranging from 90 Nm to 18500 Nm
- Gearbox housing with integral torque arm
- High efficiency through 2-stage base design
- High protection rating of IP65 as standard

Bevel Geared Motors

- Power range from 0.03 kW to 75 kW
- 10 gearbox sizes for torques ranging from 80 Nm to 18500 Nm
- Right angle with universal, space-saving mounting options
- High efficiency through 2-stage base design
- High protection rating of IP65 as standard

Worm Geared Motors

- Power range from 0.03 kW to 5.5 kW
- 8 gearbox sizes for torques ranging from 25 Nm to 1000 Nm
- Hollow shaft version available from 25 Nm
- Heavy duty worm gearing for a long service life
- High protection rating of IP65 as standard

Monorail Geared Motor Drives

- Torque rating from 30 Nm to 680 Nm
- Radial force up to 25,000 N
- Gearboxes with a wide range of mounting options
- High protection rating of IP65 as standard
- Improved efficiency
- Low energy consumption - ideal for travel drives
- Reverse motion of gearbox possible with released brake

AsepticDRIVE

- Motor without cooling ribs and fan
- Available with helical, shaft-mounted, bevel and worm gearboxes
- Motor winding with thermistors and ISO class F as standard
- IP67 and IP69K protection ratings with alkali and acid-resistant coating as standard.
- Motor connection through standard, round stainless steel connector

CleanDRIVE

- Motor without cooling ribs and fan
- Available with helical, shaft-mounted, bevel and worm gearboxes
- Motor winding with thermistors and ISO class F as standard
- Motor connection through a standard terminal box or stainless steel cable gland

Energy Efficient Geared Motors

Bauer Gear Motor - profile

HiflexDRIVE

BK04 gearbox

- Torque 80 Nm
- Gear reductions 7.25 – 63.33

BK08 gearbox

- Torque 200 Nm
- Gear reductions 4.44 - 102.5

BK17 gearbox

- Torque 330 Nm
- Gear reductions 4.54 - 108.6

Motors

- Output power 0.12 kW ... 3.0 kW
- Efficiency classes no rating and IE1 to IE4
- Enclosure IP65 (standard)
- IP67 / IP69K (optional)

Energy-efficient motor solutions

Mains Supply

- IE1 asynchronous technology 0.12 kW – 45 kW
- IE2 asynchronous technology 0.12 kW – 45 kW
- IE3 asynchronous technology 0.12 kW – 45 kW
- IE4 asynchronous technology 0.55 kW – 4 kW

Inverter Duty

- IE3 PMSM-technology 1.5 kW – 15 kW
- IE4 PMSM-technology 0.55 kW – 11 kW

Energy-efficient motor solutions for explosion hazard areas

The S series in permanent magnet synchronous motors (PMSMs) offers variable-speed geared motors in efficiency class IE4 for use in explosion hazard areas^[1].

- Design torque M_N : 5 Nm – 48 Nm
- Rated power P_N : 0.75 kW – 15 kW
- Increased safety for zone 1 II 2 G Ex e IIC T1 - T3 Gb
- Dust explosion protection – Zone 21 II 2 D Ex tb IIIC T 160°C ... 120° Db

^[1] Individual motor designs can show lower efficiency classes than IE4 at rated torque.

EtaK2.0 Decentral Solutions

- PMSM enabled
- Integrated safety technology and field bus communication according to specific needs
- Modular structure minimises spare parts stock
- Energy savings of up to 30 % possible under partial load conditions
- Suited to extremely harsh environments thanks to IP65 enclosure rating
- 200 % overload current (3 s)
- Sensorless vector control
- CANopen, Profibus, Profinet, EtherCAT, EtherNet/IP and AS-Interface
- STO safety function

Energy Efficient Geared Motors

Bauer Gear Motor - profile

Submersible Solutions

- **Special sealing concepts** for maximum leakage protection
- **Reinforced bearings** for higher strength and longer service life
- **Shafts** available on request in V4A steel or coating
- **Motor Connection**
 - Standard with cast terminal box
 - Optional with special plug connection
- **Additional features:**
 - Special design for continuous submersible operation
 - Electronic leakage detection available on request
 - Brakes available in IP68 design
 - Water depths of 5m (deeper on request)
- **Corrosion category Im2** based on DIN ISO 12944-5

Customised geared motor solutions for all applications

- Special applications
- Special adaptations
- Special environments
- Series production

Based on our modular, geared motor programme, we offer specific solutions for applications in all key markets such as, for example, food & beverage, energy, wastewater, concrete, metals and material handling in applications such as washdown conveyor systems, rolling mills, monorail systems and overhead conveyors, sludge thickeners, cranes, fans and blowers and turbines. Our aim is to provide our customers with products tailored to their needs. At the same time, we take care to ensure that a geared motor solution will prove to be especially profitable throughout its entire life cycle.

We already equip our geared motors with highly efficient permanent magnet motors to achieve low life cycle costs because low energy consumption will be particularly important in the future. We are very confident that we are once again pioneers in this sector

Learn more about Bauer Gear Motor, its products and philosophy at www.bauergears.com.