
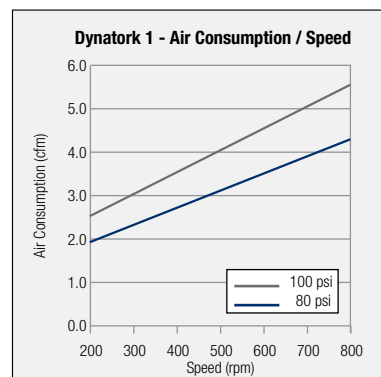
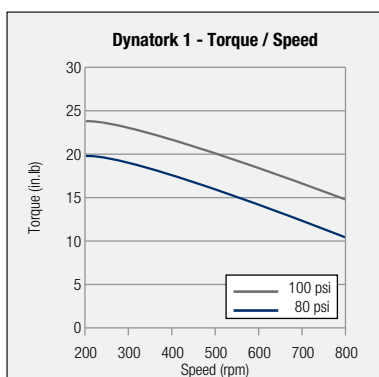


Dynatork 1 Acetal



Key Data: Dynatork 1 Acetal - Motor Ref: 910.15

Speed range	200 - 800 rpm	
Torque at 200 rpm / 100 psi	24.7 in.lb	
Torque at 800 rpm / 100 psi	14.7 in.lb	
Max air consumption 800 rpm / 100 psi	5.70 ft³/min	
Shaft Diameter	0.394"	
Weight	2.5 lb	
Ports	1/8" BSP	
Lubrication	Non-Lube: for use with a dry, clean, non-lubricated air supply (can be used in lubricated system)	

Performance

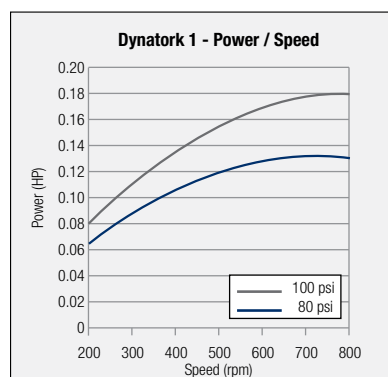

Body Mounting Drawing Dimensions in mm

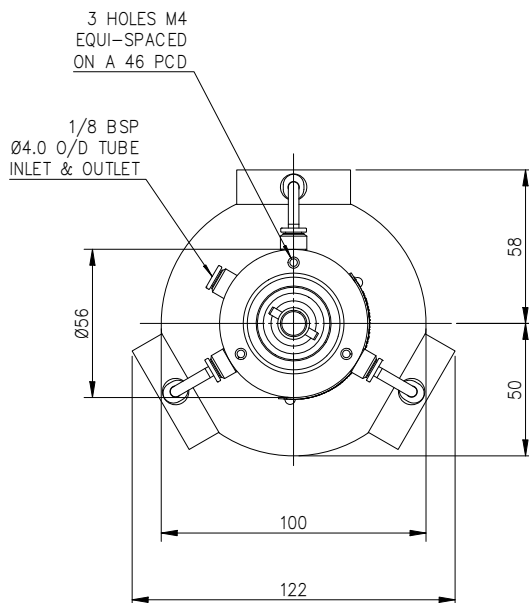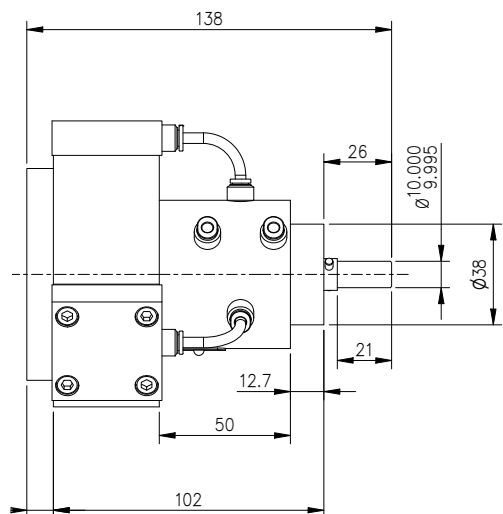




For alternative mounting option, see page 25

Key Data: Dynatork 3 Acetal- Motor Ref: 910.35

Speed range	150 - 700 rpm
Torque at 150 rpm / 100 psi	87 in.lb
Torque at 700 rpm / 100 psi	41 in.lb
Max air consumption 700 rpm / 100 psi	12.7 ft ³ /min
Shaft Diameter	0.500"
Weight	8.6 lb
Ports	1/4" BSP
Lubrication	Non-Lube: for use with a dry, clean, non-lubricated air supply (can be used in lubricated system)




Performance

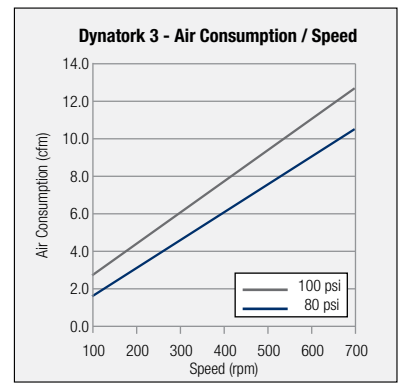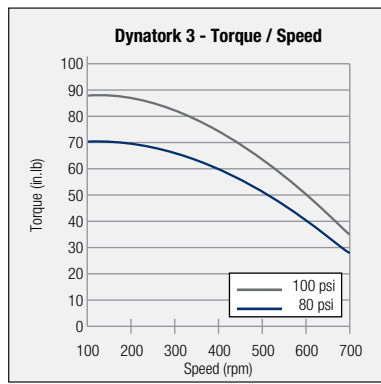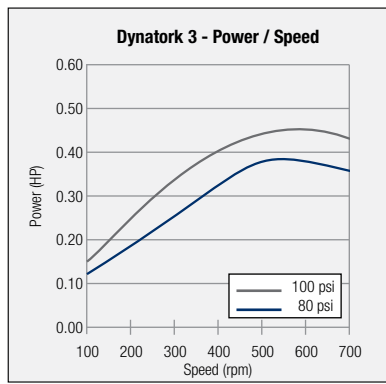

Body Mounting

Drawing Dimensions in mm

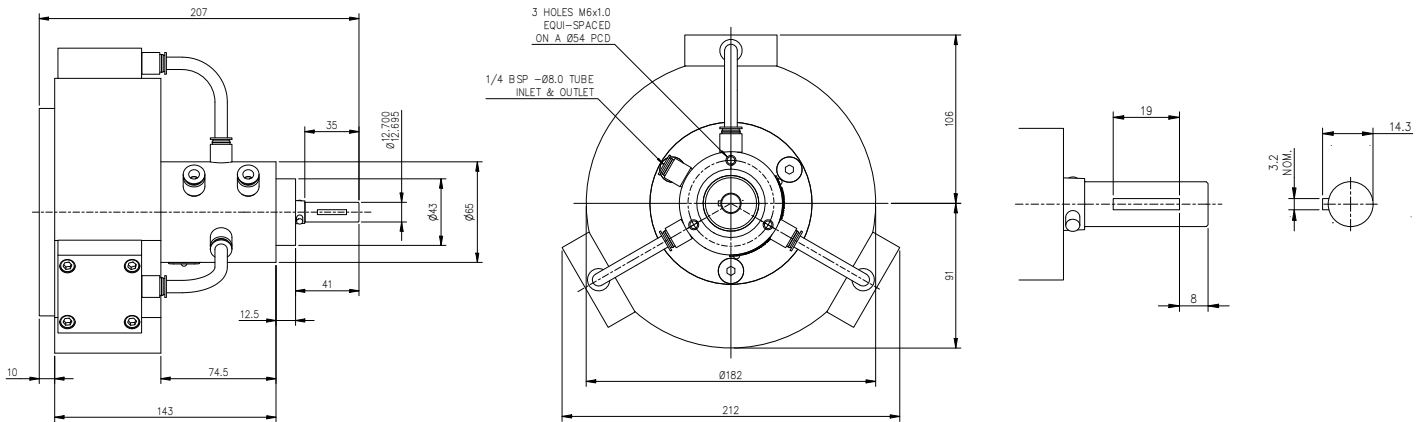

Piston Service Kit



Order Ref. 909.35

For alternative mounting option, see page 25