

Stromag Periflex® TT Top Torque Shaft Coupling



Stromag

Founded in 1932, Stromag has grown to become a globally recognized leader in the development and manufacture of innovative power transmission components for industrial drivetrain applications. Stromag engineers utilize the latest design technologies and materials to provide creative, energy-efficient solutions that meet their customer's most challenging requirements.

Stromag's extensive product range includes flexible couplings, disc brakes, limit switches, an array of hydraulically, pneumatically, and electrically actuated brakes, and a complete line of electric, hydraulic and pneumatic clutches.

Stromag engineered solutions improve drivetrain performance in a variety of key markets including energy, off-highway, metals, marine, transportation, printing, textiles, and material handling on applications such as wind turbines, conveyor systems, rolling mills, agriculture and construction machinery, municipal vehicles, forklifts, cranes, presses, deck winches, diesel engines, gensets and stage machinery.



VISIT US ON THE WEB AT **STROMAG.COM**

Altra Motion

Altra is a leading global designer and producer of a wide range of electromechanical power transmission and motion control components and systems. Providing the essential control of equipment speed, torque, positioning, and other functions, Altra products can be used in nearly any machine, process or application involving motion. From engine braking systems for heavy duty trucks to precision motors embedded in medical robots to brakes used on offshore wind turbines, Altra has been serving customers around the world for decades.

Altra's leading brands include **Ameridrives**, **Bauer** Gear Motor, **Bibby** Turboflex, **Boston** Gear, **Delevan**, **Delroyd** Worm Gear, **Formsprag** Clutch, **Guardian** Couplings, **Huco**, **Jacobs** Vehicle Systems, **Kilian**, **Kollmorgen**, **Lamiflex** Couplings, **Marland** Clutch, **Matrix**, **Nuttall** Gear, **Portescap**, **Stieber**, **Stromag**, **Svendborg** Brakes, **TB Wood's**, **Thomson**, **Twiflex**, **Warner** Electric and **Wichita** Clutch.

VISIT US ON THE WEB AT **ALTRAMOTION.COM**




CONTENT

STROMAG PERIFLEX® TOP TORQUE COUPLINGS

COUPLING AT A GLANCE	4
Product range	
Benefits include	
Applications areas	
Classifications	
Torque range	
Instruction for the designer	
Application factor	
Use in potentially explosive environments	
The torsional vibration analysis	
Assignment of Stromag PERIFLEX® TOP TORQUE COUPLINGS to electric motors	10
Output table, couplings with R tyres	12
Output table, couplings with x tyres	14
PTT Series	17
PTS Series	18
Characteristic	20
Coupling Design. question sheet	24
Use in potentially explosive environments. question sheet	25

STROMAG PERIFLEX® TT PRODUCT RANGE


PERIFLEX® TT

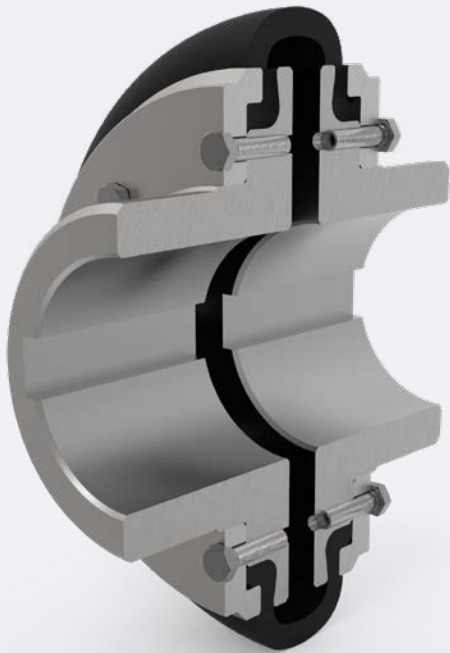

Standard design with variable hubs for shaft-shaft as well as for flanged shaft etc. connections.

Nominal torque from 35 to 20,500 Nm

PERIFLEX® TS

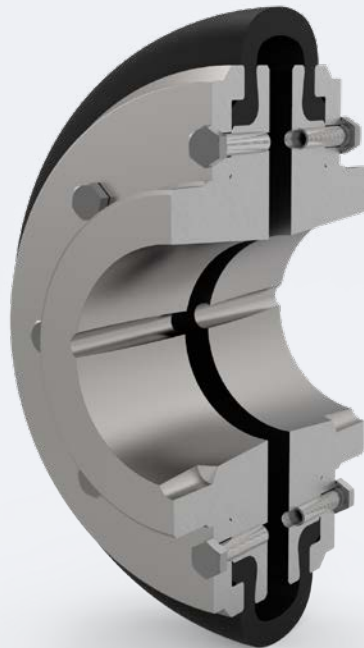

Short version of the shaft coupling.

The taper bushes allow quick and easy assembly and disassembly on a shaft.

Transmittable torque from 130 - 14,200 Nm

(depending on the taper bush used and parallel keyway inserted)


STROMAG PERIFLEX® TOP TORQUE COUPLINGS

BENEFITS INCLUDE

- The Stromag Periflex® Top Torque is a highly flexible rubber-fabric coupling. Particularly suitable for connecting two shafts in diesel engine and electric drives.
- Due to special design of the shaft tyre the coupling can absorb extremely large displacements in every direction with low restoring forces.
- Periflex® Top Torque Couplings allows radial replacements of the tyres without moving the connected machines.
- The Periflex® Top Torque transmits the torque absolutely free of backlash.
- It is suitable for absorbing torque shocks and dampens vibrations.
- Covers the torque range from 35 to 20,500 Nm

COUPLING AT A GLANCE

APPLICATIONS AREAS



- The Periflex® Top Torque is especially suited for use in metallurgical plants, in crane construction as well as for roller table drives.
- Other areas of application include electrical power units, compressors, the construction machinery industry, crane construction and general mechanical engineering.

CLASSIFICATIONS

For a coupling to be accepted by a classification society, its rules must be observed. The coupling characteristics may differ from the definitions shown in this catalogue.

The relevant prepared data sheets are available on request.

TORQUE RANGE

- Stromag Periflex® TT: 35 up to 20,500 Nm
- Stromag Periflex® TS: 130 up to 14,200 Nm

INSTRUCTION FOR THE DESIGNER

The coupling hubs and pressure rings are made of steel and have a corrosion protection layer. The shaft tyre is made of natural rubber with fabric inserts. In the R-tyres, the fabrics are laid in radial alignment and in X-tyres they are diagonal. Different technical properties are achieved by changing the type of fabric arrangement. Due to diagonally arranged fabric layers they are better suited for reverse operation or shock loads.

The Stromag Periflex® Top Torque develops a certain axial force under the influence of torque and speed which must be absorbed by suitable bearings. In order to determine the axial forces that occur, the Stromag technical document “Determining the resulting axial forces FA” must be requested.

Periflex® Top Torque can be used in the temperature range from -50°C to +80°C. The flexible element can reach higher temperatures than the ambient temperature as a result of damping work. When covering the coupling with a protective cover, this must be taken into account by ensuring adequate ventilation and heat dissipation.

Flexible couplings usually represent the safety breaking point of a drive train. Overloading the drive train therefore usually leads to failure of the flexible coupling elements. This behaviour is deliberate and protects the entire system from unforeseen damage. Any consequential damage resulting from this safety function of the coupling must be taken into account in advance by the plant designer and monitored or prevented with appropriate measures.

When stored properly, flexible rubber elements retain their properties over several years. It is essential here that the stored parts are protected against oxygen, ozone, light, heat, moisture, and solvents. Solvents, fuels, lubricants, chemicals, acids, disinfectants, and similar may not be stored in the same room. The storage temperature should not be lower than +10°C and not higher than +25°C.

All UV light sources are harmful and must be avoided. Equipment that generates ozone, e.g. light sources and electric motors, must be kept away from the storage location. The relative air humidity should not exceed 65 %. Further details can be taken from DIN 7716 and ISO 2230.

The key factors to consider when choosing a Periflex® Top Torque are the loads from transferred power and torsional vibrations. The value T_{KN} is to be used for stationary operating modes, while T_{Kmax} is to be used for non-stationary operating modes. When selecting on the basis of the system torque, the application factors f_{ANW} must be taken into account.

Stromag – Flexible Couplings

Stromag Periflex® Top Torque – Shaft Couplings

APPLICATION FACTOR

If safety factors have not been considered when designing the plant, the following application factors (f_{ANW}) should be considered in the design phase:

Application factor f_{ANW}

I	II	III
1.25	1.5	2.0

To determine the application factor, the driven machines are divided into the following groups:

- I. Work machines with uniform power consumption, such as small machine tools with rotating main movement, small woodworking machines, small fans, small centrifugal pumps, generators, belt conveyors.
- II. Medium-duty work machines with non-uniform power consumption, such as diesel and gas engines, chain conveyors, crane trolleys, generators, elevators, looms, etc.
- III. Heavy-duty machines or with non-uniform power consumption, such as excavator drives, thrashing machines, heavy drilling rigs, paper calenders, centrifuges.

USE IN POTENCIALLY EXPLOSIVE ENVIROMENTS



The coupling complies with the requirements of Directive 2014/34/EU and can be used as follows:

Device group II (Above ground application)

- Category 2G (Zone 1) and 3G (Zone 2) in atmospheres with combustible gases, mists and vapours or category 2D (Zone 21) and 3D (Zone 22) in combustible dust-air atmospheres
- Temperature category T4 for gases and vapours or a maximum surface temperature of 120°C for dust
- The ignition protection class of the coupling is “c”. This means that the protective measures comply with DIN EN 13463-5 (Protection by constructional safety ‘c’)

The Periflex® Top Torque compliance with the requirements for each of these zones/categories is documented in the form of the following codes on our products:

Use in gas atmospheres:

CE II 2G Ex h IIC (T4) Gb

Use in dust atmospheres:

CE II 3D Ex h IIIC T120°C Db

Use in potentially explosive environments must be based on the request form annexed to this catalogue.

THE TORSIONAL VIBRATION ANALYSIS



Stromag's Know-how in Torsional Vibration Analysis (TVA) constitutes the core of each coupling design. It provides a comprehensive analysis of loads in the crankshaft, coupling and driven side to ensure that no critical speeds occur during operation.

Unevenly rotating systems can severely degrade product quality and cause great harm to the powertrain. On daily bases, the TVA experts at Stromag work on the challenge of detecting such deviations by measuring them and protecting the entire powertrain with ideal product selection. Stromag is capable of calculating stationary and transient operating conditions considering the stiffness and damping of the elastomers.

Stromag – Flexible Couplings

Stromag Periflex® Top Torque – Shaft Couplings

Assignment of Stromag Periflex® Top Torque Couplings to electric motors

Assignment of Periflex® Top Torque Couplings to three-phase asynchronous motors of gear sizes 56 to 315 with cage rotor according to EN 50347.

Motor size	Motor power at 3000 rpm (2-pole)		Coupling size PTT	Motor power at 1500 rpm (4-pole)		Coupling size PTT	Cylinder shaft D x L [mm]	
	P [kW]	T [Nm]		P [kW]	T [Nm]		3000 rpm	≤ 1500 rpm
56 M	0.09	0.3	86	0.06	0.4	86	9 x 20	
	0.12	0.4	86	0.09	0.6	86		
63 M	0.18	0.6	86	0.12	0.8	86	11 x 23	
	0.25	0.8	86	0.18	1.2	86		
71 M	0.37	1.2	86	0.25	1.6	86	14 x 30	
	0.55	1.8	86	0.37	2.4	86		
80 M	0.75	2.4	86	0.55	3.5	86	19 x 40	
	1.1	3.5	86	0.75	4.8	86		
90 S	1.5	4.8	86	1.1	7.0	86	24 x 50	
90 L	2.2	7.0	86	1.5	9.6	86	24 x 50	
100 L	3	9.6	104	2.2	14	104	28 x 60	
				3	19	104		
112 M	4	13	104	4	25	104	28 x 60	
132 S	5.5	18	104	5.5	35	104	38 x 80	
	7.5	24	104					
132 M	-	-	-	7.5	48	104	38 x 80	
160 M	11	35	136	11	70	136	42 x 110	
	15	48	136					
160 L	18.5	59	136	15	96	178	42 x 110	
180 M	22	70	178	18.5	118	178	48 x 110	
180 L	-	-	-	22	140	178	48 x 110	
200 L	30	96	178	30	191	211	55 x 110	
	37	118	178					
225 S	-	-	-	37	236	211	55 x 110	60 x 140
225 M	45	143	178	45	287	211	55 x 110	60 x 140
250 M	55	175	211	55	350	211	60 x 140	65 X 140
280 S	75	239	211	75	478	263	60 x 140	75 X 140
280 M	75	287	211	90	573	263	60 x 140	75 X 140
315 S	110	350	211	110	700	263	60 x 140	80 X 170
315 M	132	420	263	132	840	310	60 x 140	80 X 170

The assignment takes application factor II into account in normal load cases.

For systems with predominantly periodic excitations, the design must be in accordance with DIN 740 Part 2. Stromag departments can provide support with the design, specifically in calculating the torsional vibrations.

Assignment of Periflex® Top Torque Couplings to three-phase asynchronous motors of gear sizes 56 to 315 with cage rotor according to EN 50347.

Motor size	Motor power at 1000 rpm (6-pole)		Coupling size PTT	Motor power at 750 rpm (8-pole)		Coupling size PTT	Cylinder shaft D x L [mm]	
	P [kW]	T [Nm]		P [kW]	T [Nm]		3000 rpm	≤ 1500 rpm
56 M	-	-	-	-	-	-	9 x 20	
63 M	-	-	-	-	-	-	11 x 23	
71 M	-	-	-	-	-	-	14 x 30	
80 M	0.37 0.55	3.5 5.3	86 86	-	-	-	19 x 40	
90 S	0.75	7.2	86	-	-	-	24 x 50	
90 L	1.1	11	86	-	-	-	24 x 50	
100 L	1.5	14	104	0.75 1.1	10 14	104 104	28 x 60	
112 M	2.2	21	104	1.5	19	104	28 x 60	
132 S	3	29	104	2.2	28	104	38 x 80	
132 M	4 5.5	38 53	104 136	3	38	104	38 x 80	
160 M	7.5	72	136	4 5.5	51 70	136 136	42 x 110	
160 L	11	105	178	7.5	96	178	42 x 110	
180 M	-	-	-	-	-	-	48 x 110	
180 L	15	143	178	11	140	178	48 x 110	
200 L	18.5 22	177 210	178 211	15	191	211	55 x 110	
225 S	-	-	-	18.5	236	211	55 x 110	60 x 140
225 M	30	287	211	22	280	211	55 x 110	60 x 140
250 M	37	353	211	30	382	263	60 x 140	65 x 140
280 S	45	430	263	37	471	263	65 x 140	75 x 140
280 M	55	525	263	45	573	263	65 x 140	75 x 140
315 S	75	716	263	55	700	263	65 x 140	80 x 170
315 M	90	860	310	75	955	310	65 x 140	80 x 170

The assignment takes application factor II into account in normal load cases.

For systems with predominantly periodic excitations, the design must be in accordance with DIN 740 Part 2. Stromag departments can provide support with the design, specifically in calculating the torsional vibrations.

Stromag – Flexible Couplings

Stromag Periflex® Top Torque – Shaft Couplings

Output table, couplings with R tyres

Coupling size	Tyre	Nominal torque	Max. torque	Admissible alternating torque	Admissible speed	Admissible axial displacement	Axial stiffness
		T_{KN} Nm	T_{Kmax} Nm	T_{KW} Nm	n_{max} rpm	ΔK_a mm	C_a N/mm 2) 3)
86 R	201 R	35	75	15	5000	1.0	60
104 R	203 R	70	150	30	5000	1.0	110
136 R	206 R	135	300	55	5000	1.5	130
178 R	210 R	270	600	110	4000	2.0	120
211 R	214 R	545	1200	215	4000	2.5	150
263 R	218 R	1000	2400	400	3000	3.0	160
310 R	222 R	2200	4800	880	3000	3.5	180
370 R	225 R	3400	7500	1360	2500	4.5	400
402 R	426 R	5500	12000	2200	2300	5.0	340
450 R	828 R	8200	18000	3280	1800	5.5	250
550 R	1230 R	13700	30000	5480	1500	6.0	1000
700 R	1832 R	20500	45000	8200	1000	6.0	1800

1) At maximum speed

2) This value must be reduced at coupling temperatures higher than 30°C above the temperature factor (see page 21)

3) Material tolerances up to ± 15% are possible

Admissible radial displacement	Radial stiffness	Admissible angular displacement	Torsional stiffness					Relative damping
ΔK_r mm 1) 2)	C_r N/mm 2) 3)	ΔK_w ° 1) 2)	$C_{T \text{ dyn}}$ Nm/rad 2) 3)					ψ 3)
			$0.0 \times T_{KN}$	$0.25 \times T_{KN}$	$0.5 \times T_{KN}$	$0.75 \times T_{KN}$	$1.0 \times T_{KN}$	
0.70	60	2.0	295	280	285	305	335	1.2
0.75	120	2.0	690	645	675	770	910	1.2
1.0	120	2.0	1100	1000	1100	1300	1650	1.2
1.3	110	2.0	2100	2050	2250	2650	3150	1.2
1.6	150	2.0	5000	4650	4950	5400	5950	1.2
2.1	150	2.0	6800	6200	7200	9900	15000	1.2
2.5	200	2.0	14000	13200	18200	28700	44500	1.2
3.0	400	2.0	22500	23000	33000	46000	61000	1.2
3.5	500	2.0	29000	28000	50000	84000	128000	1.2
3.7	400	2.0	29000	29000	52000	87000	132000	1.2
4.2	1200	2.0	41000	42000	71000	110000	154000	1.2
5.2	1500	2.0	134000	131000	143000	164000	192000	1.2

Stromag – Flexible Couplings

Stromg Periflex® Top Torque – Shaft Couplings

Output table, couplings with X tyres

Coupling size	Tyre	Nominal torque	Max. torque	Admissible alternating torque	Admissible speed	Admissible axial displacement	Axial stiffness
		T_{KN} Nm	T_{Kmax} Nm	T_{KW} Nm	n_{max} rpm	ΔK_a mm	C_a N/mm 2) 3)
86 X	201 X	35	75	15	5000	1.0	90
104 X	203 X	70	150	30	5000	1.0	140
136 X	206 X	135	300	55	5000	1.5	150
178 X	210 X	270	600	110	4000	2.0	150
211 X	214 X	545	1200	215	4000	2.5	80
263 X	218 X	1000	2400	400	3000	3.0	80
310 X	222 X	2200	4800	880	3000	3.5	100
370 X	225 X	3400	7500	1360	2500	4.5	400
402 X	426 X	5500	12000	2200	2300	5.0	400
450 X	828 X	8200	18000	3280	1800	5.5	300
550 X	1230 X	13700	30000	5480	1500	6.0	1000
700 X	1832 X	20500	45000	8200	1000	6.0	1800

1) At maximum speed

2) This value must be reduced at coupling temperatures higher than 30°C above the temperature factor (see page 21)


3) Material tolerances up to $\pm 15\%$ are possible

Admissible radial displacement	Radial stiffness	Admissible angular displacement	Torsional stiffness					Relative damping
ΔK_r mm 1) 2)	C_r N/mm 2) 3)	ΔK_w ° 1) 2)	$C_{T \text{ dyn}}$ Nm/rad 2) 3)					ψ 3)
			$0.0 \times T_{KN}$	$0.25 \times T_{KN}$	$0.5 \times T_{KN}$	$0.75 \times T_{KN}$	$1.0 \times T_{KN}$	
0.70	150	2.0	290	320	440	580	740	1.1
0.75	250	2.0	1160	1280	1410	1570	1810	1.1
1.0	350	2.0	2230	2560	2810	3050	3300	1.1
1.3	300	2.0	4000	5250	5950	6350	6650	1.1
1.6	650	2.0	12000	14300	15450	16200	16600	1.1
2.1	900	2.0	14000	17750	19700	20900	21750	1.1
2.5	900	2.0	22000	31000	37300	41700	45200	1.1
3.0	2500	2.0	60000	78000	88000	93500	96500	1.1
3.5	1650	2.0	80000	93000	99000	102000	104000	1.1
3.7	1800	2.0	90000	85500	99500	127000	165500	1.1
4.2	3500	2.0	150000	135800	142300	161000	188500	1.1
5.2	4000	2.0	360000	321500	333000	369000	421000	1.1

VARIATION OF SHAFT COUPLINGS


PERIFLEX® NC

Shaft coupling with fail-safe device
Nominal torque range 35 – 15,000 Nm

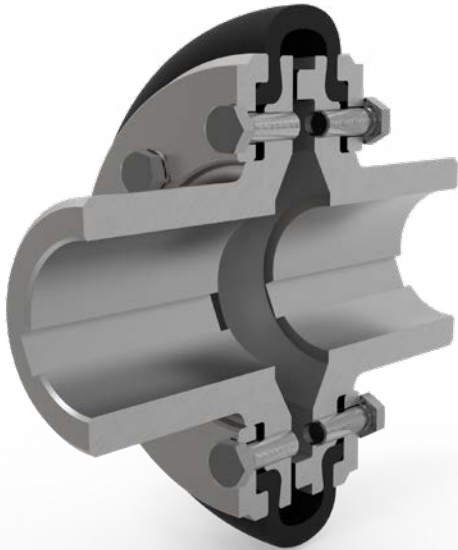


PERIFLEX® NP

Shaft coupling with dismantling part (SPN/SPL)
for pump drives
Nominal torque range 35 – 1600 Nm

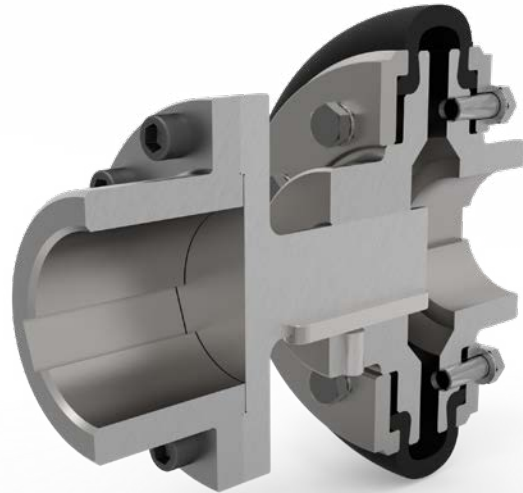


PERIFLEX® NB


Shaft coupling with brake drum
Nominal torque range 300 – 10,000 Nm

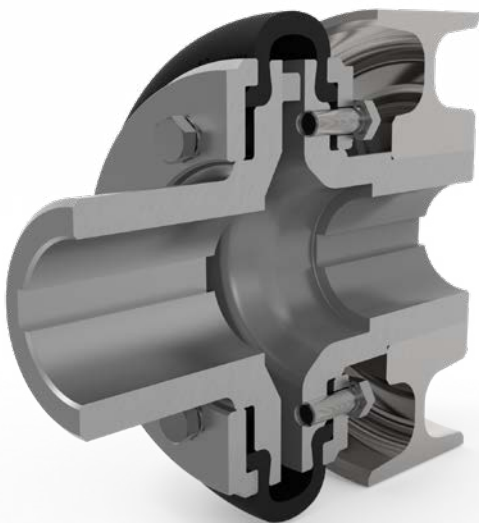

PERIFLEX® ND

Shaft coupling with brake disc
Nominal torque from 300 – 10,000 Nm

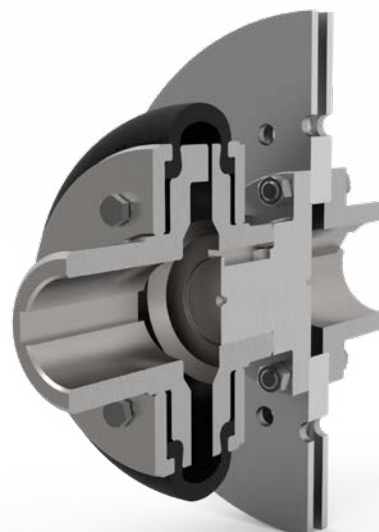

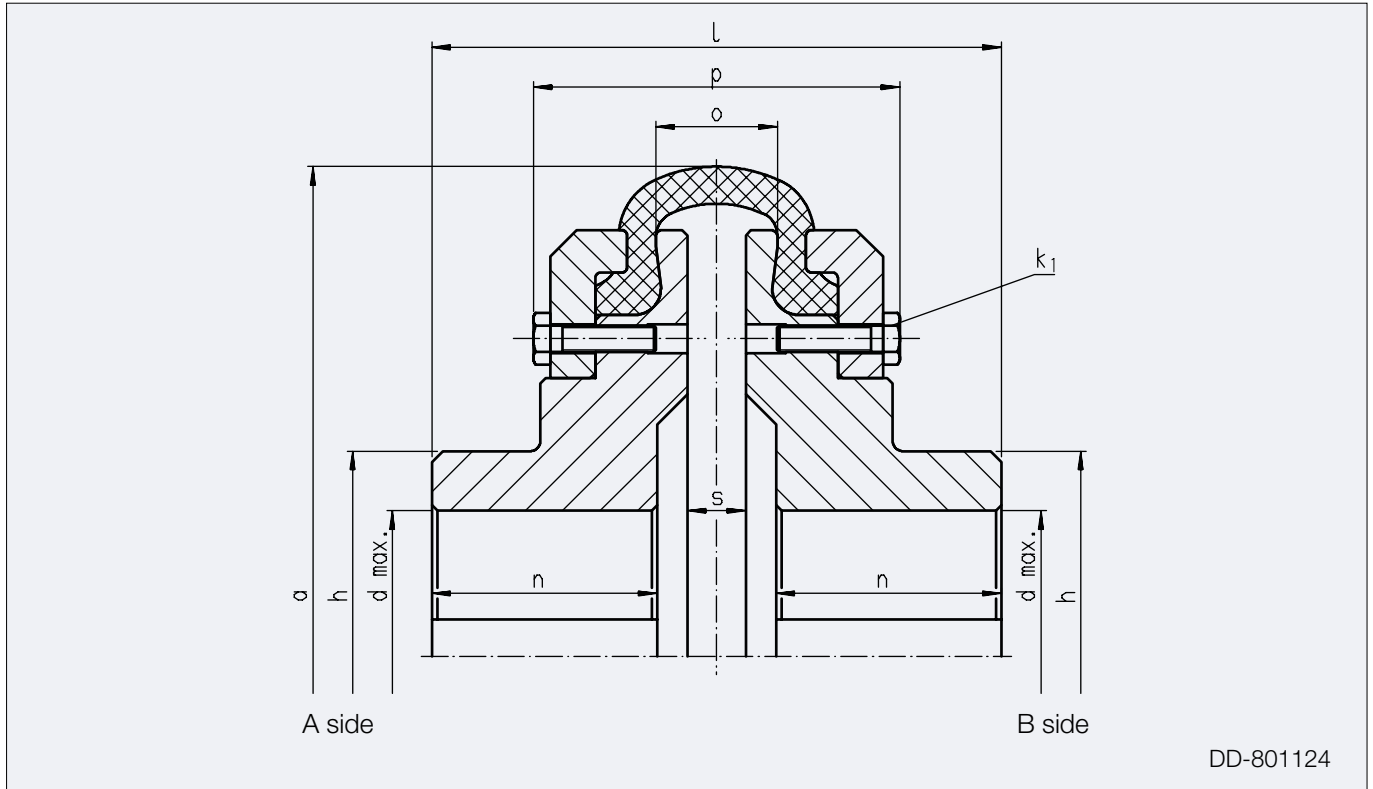


PTT...R Series												
Coupling size	86 R	104 R	136 R	178 R	211 R	263 R	310 R	370 R	402 R	450 R	550 R	700 R
Tyre	201 R	203 R	206 R	210 R	214 R	218 R	222 R	225 R	426 R	828 R	1230 R	1832 R
PTT...X Series												
Coupling size	86 X	104 X	136 X	178 X	211 X	263 X	310 X	370 X	402 X	450 X	550 X	700 X
Tyre	201 X	203 X	206 X	210 X	414 X	418 X	422 X	225 X	426 X	828 X	1230 X	1832 X
Nominal torque T_{KN} [Nm]	35	70	135	270	545	1000	2200	3400	5500	8200	13700	20500
Diameter [mm]												
a	86	104	136	178	210	263	310	370	402	450	550	700
d_{max}	24	30	42	55	65	85	110	110	120	130	150	180
h	34	43	58	76	92	120	154	155	170	185	210	255
Screws K_1	4x M5	4x M6	6x M6	6x M8	6x M10	6x M10	8x M10	8x M10	12x M12	12x M16	12x M16	12x M20
Length [mm]												
l	60	70	110	130	160	190	240	235	294	340	480	530
n	26	31	51	55.5	70	84.5	110	106.5	135	153	198	217
o	16	16	18	35	38	44	42	46	50	70	120	150
$p_{unclamped}$	60	85	77	103	112	130	146	160	163	197	296	380
s	8	8	8	19	20	21	20	22	24	34	84	96
Mass moment of inertia J [kgm ²]												
J_A side *)	0.00025	0.00050	0.0017	0.0064	0.0173	0.0596	0.151	0.379	0.558	0.894	1.999	6.274
J_B side *)	0.00025	0.00050	0.0017	0.0064	0.0173	0.0596	0.151	0.379	0.558	0.894	1.999	6.274
Mass m [kg] *)	0.81	1.21	2.55	5.24	9.91	20.4	35.9	59.8	78.1	105	172	340

*) at maximum bore diameter

Stromag – Flexible Couplings

Stromg Periflex® Top Torque – Shaft Couplings

HH design

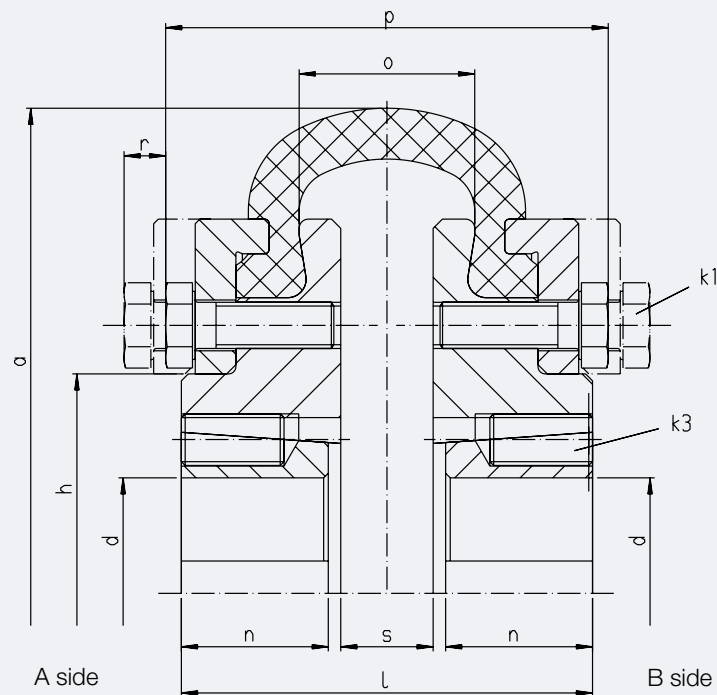

PTS...R Series

Coupling size	104 R	136 R	178 R	211 R	263 R	
Tyre	203 R	206 R	210 R	214 R	218 R	

PTS...X Series

Coupling size	104 X	136 X	178 X	211 X	263 X	
Reifen	203 X	206 X	210 X	414 X	418 X	
Design	HH	GG	HH	GG	HH	GG
Taper bush	1008	1008	1108	1210	1615	2012
max. Torque T_{Smax} [Nm]	130	130	140	300	480	800

Diameter [mm]

a	104	104	136	136	178	178	211	211	263	263	
d_{max}	24	24	25	30	40	50	50	60	60	75	
h	43	43	59	59	77	77	95	98	122	122	
Screws K_1	4x M6		6x M6		6x M8		6x M10		6x M10		
Screws K_3 (BSW)	2x 1/4"	2x 1/4"	2x 1/4"	2x 3/8"	2x 3/8"	2x 7/16"	2x 7/16"	2x 1/2"	2x 1/2"	2x 5/8"	


Length [mm]

l	53	53	53	59	95	86	89	96	111	123	
n	20	20	20	25.5	38	30.5	30.5	43	43	50.8	
o	16	16	18	18	35	35	38	38	44	44	
p	54.4	54.4	62.8	62.8	87.6	90	95.8	103	110.1	110.1	
r	3.4	3.4	6.6	6.6	8.7	7.5	9	8	11.4	11.4	
s	8	8	8	8	19	6	20	7	21	21	

Mass moment of inertia J [kgm²]

J_A side *)	0.0005	0.0005	0.0016	0.0016	0.0061	0.0061	0.0154	0.0154	0.0562	0.0540	
J_B side *)	0.0005	0.0005	0.0016	0.0016	0.0061	0.0061	0.0154	0.0154	0.0562	0.0540	
Mass m [kg] *)	1.05	1.06	2.14	1.97	4.74	4.74	7.89	7.89	17.6	15.6	

*) Without taper bushes

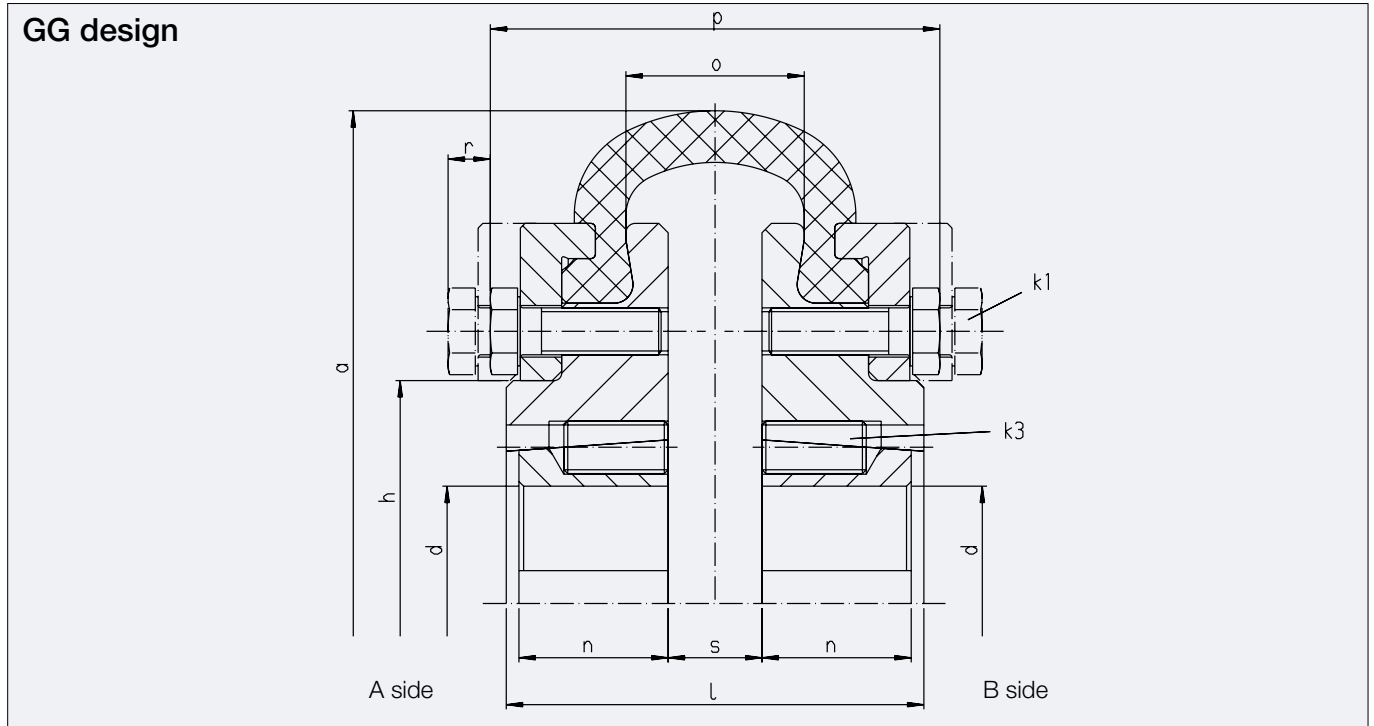

310 R		370 R		402 R		450 R		550 R	
222 R		225 R		426 R		828 R		1230 R	
310 X		370 X		402 X		450 X		550 X	
422 X		225 X		426 X		828 X		1230 X	
wHH	GG	HH	GG	HH	GG	HH	GG	HH	GG
3030	3525	3525	3525	3525	4030	4030	4535	4545	5050
2700	4800	5050	5050	5050	8700	8700	12400	12400	14200
310	310	370	370	402	402	450	450	550	550
125	95	95	95	95	115	115	125	115	125
158	158	210	210	235	235	220	220	250	250
8x M10		8x M10		12x M12		12x M16		12x M16	
2x 5/8"	3x 1/2"	3x 1/2"	3x 1/2"	3x 1/2"	3x 5/8"	3x 5/8"	3x 3/4"	3x 3/4"	3x 7/8"
174	148	150	150	152	176	186	214	312	340
76	64	64	64	64	76	76	89	114	127
42	42	46	46	50	50	70	70	120	120
121	121	133.4	133.4	139.8	139.8	178.6	178.6	262.4	262.4
14.4	14.4	14.7	14.7	14.6	14.6	15.7	15.7	21.8	21.8
20	20	22	22	24	24	34	34	84	84
0.141	0.131	0.362	0.362	0.523	0.518	0.831	0.825	1.885	1.871
0.141	0.131	0.362	0.362	0.523	0.518	0.831	0.825	1.885	1.871
33.0	27.3	52.0	52.0	65.2	62.5	86.5	83.7	148	144

Stromag – Flexible Couplings

Stromag Periflex® Top Torque – Shaft Couplings

Characteristics

T_{KN}	
The nominal torque of the coupling can be permanently transferred over the entire admissible speed range. It must not exceed the nominal torque T_N of the system.	$T_{KN} \geq T_N$


T_{Kmax}	
<p>The maximum torque T_{Kmax} of the coupling can be endured as a peak load and must not be exceeded by peak torques T_{max} when the system is operating in normal, transient conditions.</p> <p>Normal transient operating conditions of a system are unavoidable and occur repeatedly (such as start and stop procedures, resonance passes, switchovers, accelerations, etc.).</p> <p>The maximum torque of the coupling can be tolerated for a short period of time, i. e. without thermal influences on the coupling, as a swelling or alternating load.</p> <p>Overloading the Stromag Periflex® Top Torque coupling with the system's irregular, non-stationary peak torques shortens the service life.</p> <p>Irregular, transient peak torques of a system can be avoided and are not part of the planned operating pattern (for example, emergency stop, synchronisation failure, short circuit, etc.).</p>	$T_{Kmax} \geq T_{max}$

T_{Kw}	
<p>The admissible continuous alternating torque indicates the amplitude of the continuously permissible periodic torque fluctuation.</p> <p>This torque may be superimposed on a base load equal to T_{KN}.</p>	

ΔK_a	
Admissible axial displacement of the coupling. The axial displacement ΔW_a of the shafts must be smaller than ΔK_a .	$\Delta K_a \geq \Delta W_a$

ΔK_r	
<p>Admissible radial displacement of the coupling. The radial displacement ΔW_r of the shafts must be smaller than ΔK_r.</p> <p>The specified values for ΔK_r are related to the maximum speed of the coupling. The admissible radial displacement must be reduced at ambient temperatures above 30°C by the temperature factor S_{9Kr}; see diagram on page 21.</p>	$\Delta K_r \geq \Delta W_r$ $\Delta K_r(T_u) = \frac{\Delta K_r}{S_{9Kr}}$

ΔK_w	
<p>Admissible angular displacement of the coupling. The angular displacement of the shafts ΔW_w must be smaller than ΔK_w.</p> <p>The specified value for ΔK_w refers to the maximum speed of the coupling.</p> <p>However, this value may only be fully used if there are no further radial displacements.</p> <p>The admissible angular displacement must be reduced at ambient temperatures above 30°C by the temperature factor S_{9Kw}; see diagram on page 21.</p>	$\Delta K_w \geq \Delta W_w$ $\Delta K_w(T_u) = \frac{\Delta K_w}{S_{9Kw}}$

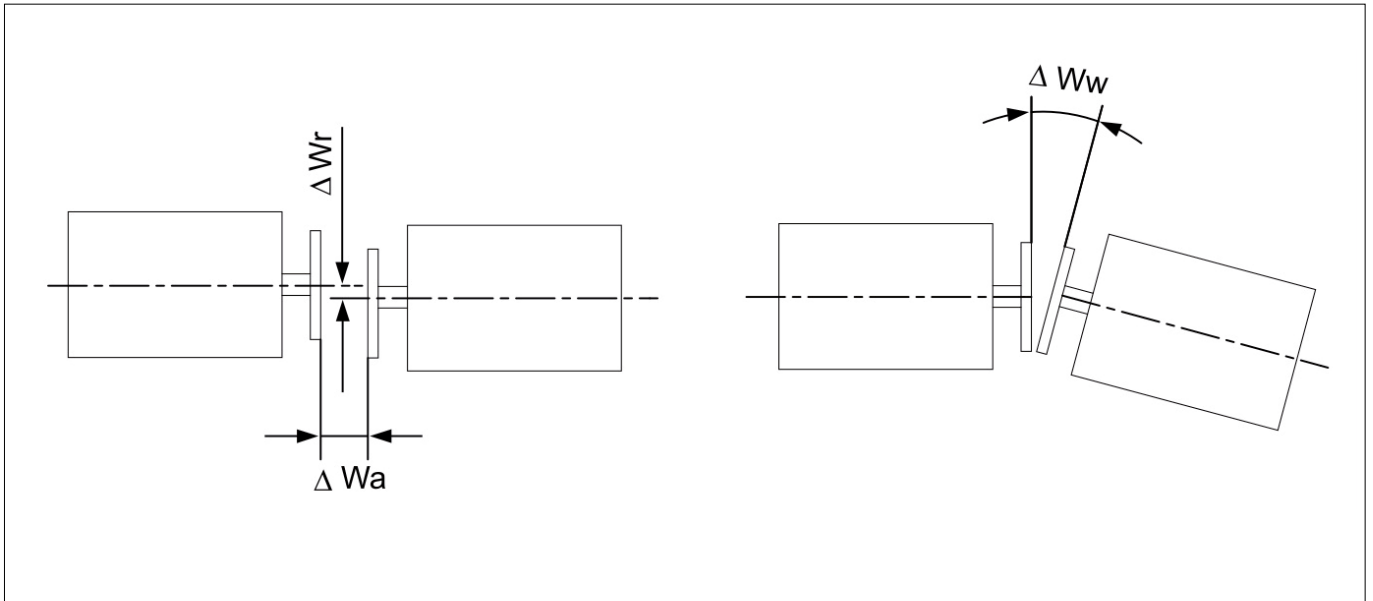

C_a

The axial stiffness indicates the axial restoring force after axial displacement. At ambient temperatures above 30°C, the specified values must be reduced by temperature factor S_{9C} ; see diagram on page 23.

$$C_a(T_U) = \frac{C_a}{S_{9C}}$$

C_r

The radial stiffness indicates the radial restoring force after radial displacement. For ambient temperatures above 30°C, the indicated values must be reduced by the temperature factor S_{9C} ; see diagram on page 23.

$$C_r(T_U) = \frac{C_r}{S_{9C}}$$

C_{Tdyn}

The dynamic torsional stiffness indicates the relationship of a torque amplitude to the rotational angle amplitude during an oscillation process.

With Periflex® Top Torque, the C_{Tdyn} value is not constant (progressive characteristic) over the coupling torque and also changes with the amplitude, frequency and temperature of the tyre.

The specifications for C_{Tdyn} are based on an alternating torque of $0.25 \times T_{KN}$, a frequency of 10 Hz and an ambient temperature T_U below 30°C.


For higher ambient temperatures, the indicated values must be reduced by the temperature factor S_{9C} ; see diagram on page 23.

$$C_{Tdyn} = \frac{T_{el}}{\varphi_w}$$

$$C_{Tdyn}(T_U) = \frac{C_{Tdyn}}{S_{9C}}$$

Characteristics

Ψ	
<p>The relative damping is a measure of the coupling's ability to convert part of the oscillation energy into heat.</p> <p>The relative damping can be determined with the damping loop (hysteresis loop).</p> <p>The area A_D is a measure of the damping work W_D during an oscillation cycle.</p> <p>The area A_{el} represents flexible deformation work W_{el} at a given load.</p> <p>The specifications for Ψ are based on a coupling torque of $0.75 \times T_{KN}$, an alternating torque of $0.25 \times T_{KN}$ and a frequency of 10 Hz with a coupling in warm operating conditions and a surface temperature of approximately 30°C.</p>	$\Psi = \frac{W_D}{W_{el}} = \frac{A_D}{A_{el}}$

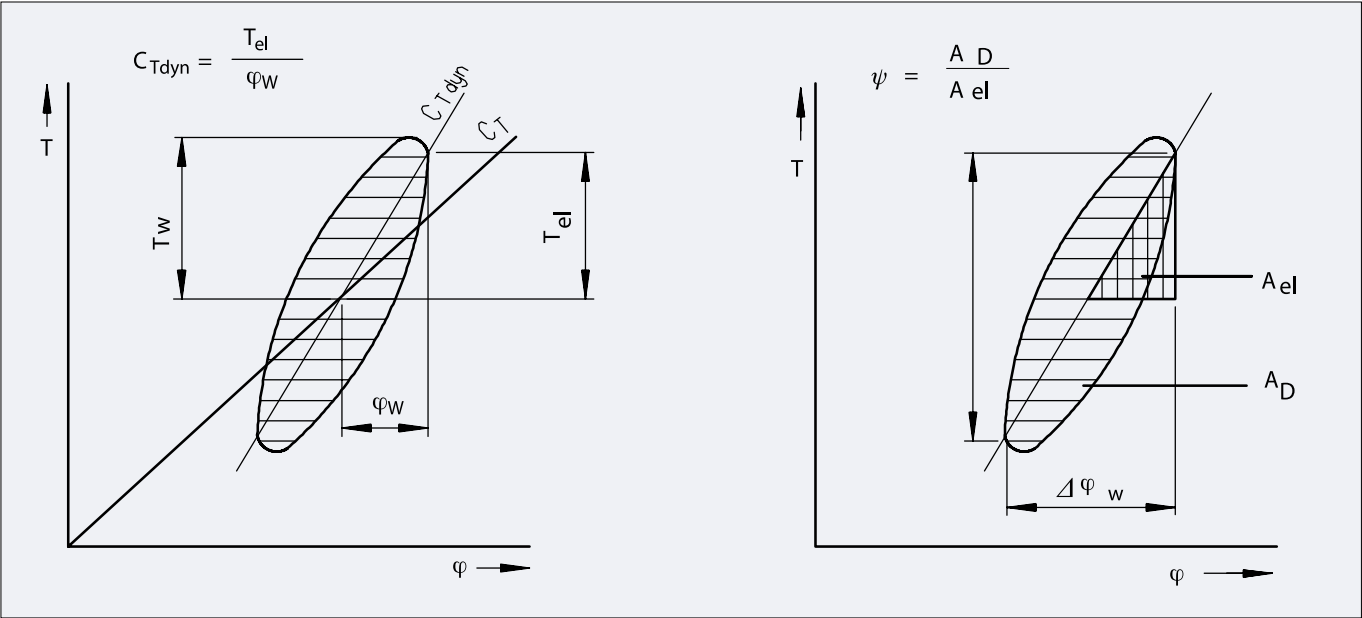


S_{gKr} , S_{gKw} and S_{gC}

Temperature factors should take into account the decrease in the physical properties of flexible rubber materials due to excessive heating.

The coupling temperature is determined by the ambient temperature as well as internal heating caused by internal material friction in the rubber volume as a result of alternating torques and alternating loads due to shaft displacement.

At higher ambient temperatures, the coupling characteristics ΔK_r and ΔK_w must be reduced by the temperature factors S_{gKr} and S_{gKw} , C_{Tdyn} , C_r and C_a are set to a value that is reduced by the temperature factor S_{gC} due to heating.

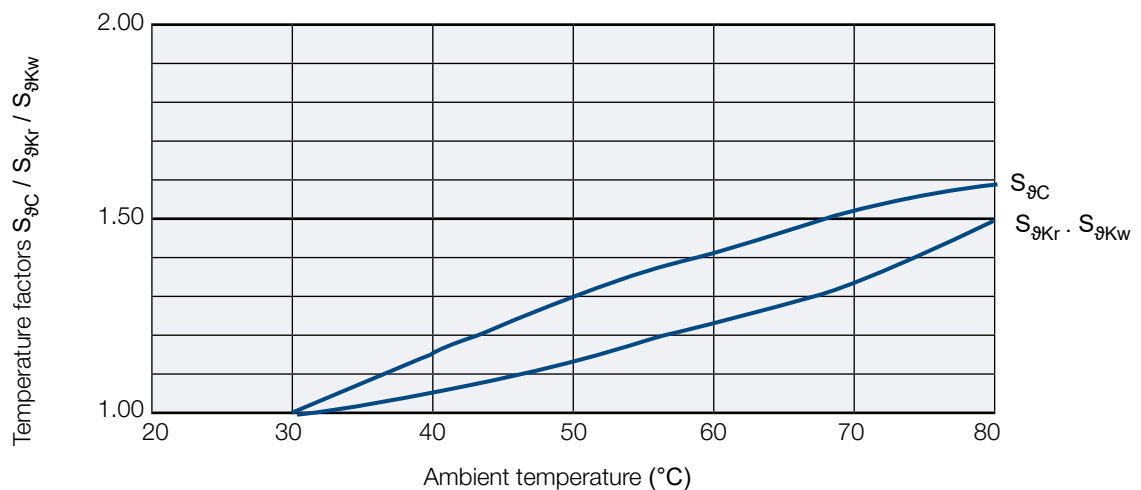

Stromag – Flexible Couplings

Stromag Periflex® Top Torque – Shaft Couplings

Coupling design, question sheet

Main engine		
Engine type (electric, internal combustion engine, etc.)		
Motor type (make, type)		
Motor installation (rigid, flexible)		
Engine housing (SAE)		
Flywheel centring diameter		mm
Power rating		kW
Nominal speed		rpm
Speed range		rpm
Nominal torque		Nm
Maximal torque (tilting moment)		Nm
Moment of inertia		kgm ²
Number of hourly starts or reversals		
Gear		
Gear ratio		
Moment of inertia		kgm ²
Driven side		
Type (generator, fan, compressor, fixed or variable pitch propeller)		
Main or auxiliary drive		
Type of construction (free-standing or flange-mounted)		
Moment of inertia		kgm ²
Coupling		
Application site in the drive train (please enclose schematic sketch)		
Bore dimensions for coupling hub		mm
Ambient temperature		°C, °K
Classification society		

Use in potentially explosive environments, question sheet

Field of application		<input type="radio"/>	Group II (above ground application)
Potentially explosive atmosphere of air with		<input type="radio"/>	Gas
		<input type="radio"/>	Dust
Use in zone (category)	Gas	<input type="radio"/>	Zone 1 (category 2G)
		<input type="radio"/>	Zone 2 (category 3G)
	Dust	<input type="radio"/>	Zone 21 (category 2D)
		<input type="radio"/>	Zone 22, conductive (category 2D)
		<input type="radio"/>	Zone 22, insulating (category 3D)
Temperature class for gas atmosphere	Gas	<input type="radio"/>	T1
		<input type="radio"/>	T2
		<input type="radio"/>	T3
		<input type="radio"/>	T4
Maximum admissible surface temperature	Dust	<input type="radio"/>	120°C
		<input type="radio"/>	< 120°C
		<input type="radio"/>	-20°C to +40°C
Ambient temperature		<input type="radio"/>	Deviating ambient temperatures only with restrictions

Stromag – Flexible Couplings

This image shows a full page of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. In the top-left corner, the word "Notes" is written in a bold, dark blue font. The rest of the page is blank, providing space for writing.

Premier Industrial Company Leading Brands

OTHER PRODUCT SOLUTIONS FROM **ALTRA MOTION**

Our comprehensive product offerings include various types of clutches and brakes, overrunning clutches, engineered bearing assemblies, gearing and gear motors along with linear motion products, belted drives, couplings, limit switches, precision motors, drives & controls, miniature motors and engine braking systems. With thousands of product solutions available, Altra provides true single source convenience while meeting specific customer requirements. Many major OEMs and end users prefer Altra products as their No. 1 choice for performance and reliability.

WWW.ALTRAMOTION.COM



Electric Clutches & Brakes

Inertia Dynamics
Matrix
Stromag
Warner Electric



Precision Motors & Automation

Kollmorgen



Heavy Duty Clutches & Brakes

Industrial Clutch
Stromag
Svendborg Brakes
Twiflex
Wichita Clutch



Miniature Motors

Portescap



Overrunning Clutches

Formsprag Clutch
Marland Clutch
Stieber



Linear Systems

Thomson



Engineered Couplings & Universal Joints

Ameridrives
Bibby Turboflex
Guardian Couplings
Huco
Lamiflex Couplings
Stromag
TB Wood's



Engine Braking Systems

Jacobs Vehicle Systems



Gear Drives & Gear Motors

Bauer Gear Motor
Boston Gear
Delroyd Worm Gear
Nuttall Gear



Specialty Components

Kilian
Stromag
TB Wood's

Stromag Facilities

Europe

Germany

Hansastraße 120
59425 Unna - Germany
+49 (0) 23 03 102 0

*Clutches & Brakes, Couplings,
Geared Cam Limit Switches, Discs*

Dessauer Str. 10
06844 Dessau-Roßlau - Germany
+49 (0) 340 2190 0

Electromagnetic Clutches & Brakes

France

Avenue de l'Europe
18150 La Guerche sur L'Aubois - France
+33 (0)2 48 80 72 72

Disc Brakes & Drum Brakes

Great Britain

Amphill Road
Bedford, MK42 9RD - UK
+44 (0)1234 324347

*Electromagnetic Clutches & Brakes,
Industrial Caliper Brakes*

North America

USA

31 Industrial Park Road
New Hartford, CT 06057 - USA
860-238-4783

Electromagnetic Clutches & Brakes

300 Indiana Highway 212
Michigan City, IN 46360 - USA
219-874-5248

Couplings

2800 Fisher Rd.
Wichita Falls, TX 76302 - USA
940-723-3400

*Geared Cam Limit Switches,
Industrial Caliper & Drum Brakes*

South America

Brasil

Avenida João Paulo Ables, 2970
Jardim da Glória, Cotia - SP,
06711-250 - Brasil
+55 (11) 4615-6300

*Flexible Couplings, Bearing
Isolators, and Coupling Guards*

Asia Pacific

China

T40B -5, No. 1765 Chuan Qiao Road
Pudong 201206, Shanghai - China
Tel +86 21-60580600

*Clutches & Brakes, Electromagnetic
Clutches & Brakes, Couplings, Industrial
Caliper & Drum Brakes, Discs, Geared
Cam Limit Switches*

India

Gat No.: 448/14, Shinde Vasti, Nighoje
Tal Khed, Pune- 410 501
+91 2135 622100

*Clutches & Brakes, Electromagnetic
Clutches & Brakes, Couplings, Industrial
Caliper & Drum Brakes, Discs, Geared
Cam Limit Switches, Wind Brakes*

Altra Renewable Energy

Denmark

Jernbanevej 9
5882 Vejstrup
+45 63 255 255

Wind Brakes

The Brands of Altra Motion

Couplings

Ameridrives
www.ameridrives.com

Bibby Turboflex
www.bibbyturboflex.com

Guardian Couplings
www.guardiancouplings.com

Huco
www.huco.com

Lamiflex Couplings
www.lamiflexcouplings.com

Stromag
www.stromag.com

TB Wood's
www.tbwoods.com

Linear Systems

Thomson
www.thomsonlinear.com

Geared Cam Limit Switches

Stromag
www.stromag.com

Engineered Bearing Assemblies

Kilian
www.kilianbearings.com

Electric Clutches & Brakes

Matrix
www.matrix-international.com

Stromag
www.stromag.com

Warner Electric
www.warnerelectric.com

Belted Drives

TB Wood's
www.tbwoods.com

Heavy Duty Clutches & Brakes

Twiflex
www.twiflex.com

Stromag
www.stromag.com

Svendborg Brakes
www.svendborg-brakes.com

Wichita Clutch
www.wichitaclutch.com

Gearing & Specialty Components

Bauer Gear Motor
www.bauergears.com

Boston Gear
www.bostongear.com

Delevan
www.delevan.com

Delroyd Worm Gear
www.delroyd.com

Nuttall Gear
www.nuttallgear.com

Engine Braking Systems

Jacobs Vehicle Systems
www.jacobsvehiclesystems.com

Precision Motors & Automation

Kollmorgen
www.kollmorgen.com

Miniature Motors

Portescap
www.portescap.com

Overrunning Clutches

Formsprag Clutch
www.formsprag.com

Marland Clutch
www.marland.com

Stieber
www.stieberclutch.com

Neither the accuracy nor completeness of the information contained in this publication is guaranteed by the company and may be subject to change in its sole discretion. The operating and performance characteristics of these products may vary depending on the application, installation, operating conditions and environmental factors. The company's terms and conditions of sale can be viewed at <http://www.altramotion.com/terms-and-conditions/sales-terms-and-conditions>. These terms and conditions apply to any person who may buy, acquire or use a product referred to herein, including any person who buys from a licensed distributor of these branded products.

©2020 by Stromag LLC. All rights reserved. All trademarks in this publication are the sole and exclusive property of Stromag LLC or one of its affiliated companies.