



**Integrated
electronic
torque
monitoring**
Geared motors
designed for
Industry 4.0



BAUER GEAR MOTOR™

A REGAL REXNORD BRAND

TorqueControl4.0

As digitisation advances and with Industry 4.0 on the rise, passive actuators are becoming active components by relaying data that can be used in the machine or system for diagnostics or further processing. This constituted an opportunity for Bauer Gear Motor to expand its geared motor portfolio and respond to new requirements accordingly. Developed under the slogan "Geared Motor Goes Online", **TorqueControl4.0** has been combined with a mains-powered geared motor to create an Industry 4.0 component with a range of useful additional functions. Connecting **TorqueControl4.0** via IO link enables the geared motor to be integrated into the machine control interface without the need for additional components.

Features

- Direct integration of motors into PLC via IO link
- Quick configuration
- Use of motor as an Industry 4.0 component
- Rapid torque measurement
- Rapid torque release in the event of an overload
- Status and process monitoring
- Soft start
- Wear-free switching in the event of frequent switching cycles
- Electronic nameplate

Benefits

- Time saved during commissioning
- Motor as a data mining device
- No additional mechanical overload clutches
- Flexible usage and no maintenance
- Quick restart following overload
- Ability to access load cycle
- Ability to save on infrastructure components, e.g. soft start
- Increase in efficiency under partial load
- No additional interface required
- Rapid, secure access to geared motor data

The diagram illustrates the integration of TorqueControl4.0 into a geared motor. It shows three components being replaced: a Protector, Soft start, and Overload clutch, which are crossed out with red 'X' marks. These are replaced by the TorqueControl4.0 unit, indicated by a plus sign and an equals sign. Below this, a blue geared motor is shown with the TorqueControl4.0 unit installed. Three icons at the bottom represent the replaced components: a switch for the Protector, a ramp for Soft start, and a clutch for the Overload clutch. To the right, two graphs compare torque settings. The top graph, labeled 'Only one torque setting', shows a single horizontal red line labeled 'SET' that the torque curve crosses. The bottom graph, labeled 'Variable torque settings', shows a shaded red area around the 'SET' line, indicating a range of torque settings that the torque curve can stay within.

Availability on request

Rapid, accurate torque measurement

Rapid, accurate current and voltage measurements enable **TorqueControl4.0** to display, report and assess torque progression cyclically. As an example, this can be used with the integrated power semiconductors to quickly shut down the system in the event of overload, or to set axes based on the torque. This makes **TorqueControl4.0** the equivalent of an overload clutch where the parameters can be set electronically. This also makes it possible to make a precise assessment of the motor in the load spectrum.

Areas of application


- Replaces mechanical overload clutches, e.g. in material handling
- Positioning applications dependent on torque
- Data collection for reproducing and evaluating the load spectrum (data mining)

Start/stop ramp smoothing

Smoothing start/stop ramps enables the force of the initial jolt to be limited. At the same time, the system limits the starting current in the same way as a conventional soft starter.

Areas of application

- Material handling
- Intralogistics
- Starting under load
- Applications sensitive to jolts

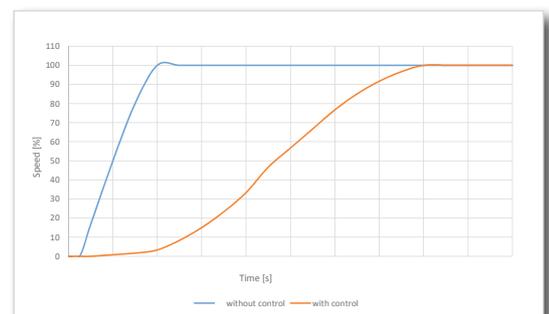


Adaptive load control via variable voltage adjustment

Continuous load-point recording enables **TorqueControl4.0** to alter the motor's magnetisation by adjusting the voltage. This increases efficiency in the partial-load range. As a result, efficiency can be significantly increased by up to 25% in applications run primarily in the partial-load range.

Areas of application

- Material handling
- Intralogistics

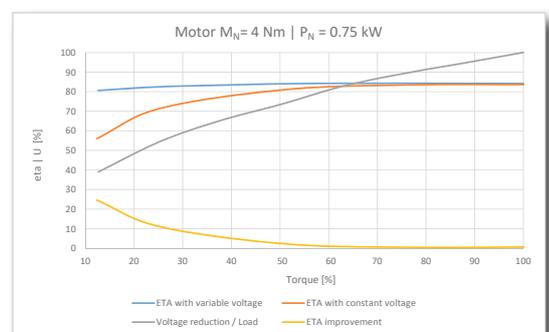

Specifications

- IP65 enclosure
- Power range: up to 2,2 kW
- Voltage range: 400 – 460 V +/- 10 %
- Working temperature: -25°C to +55°C
- 1 input and 1 output - 24 V
- Connections:
 - 1x power connection via LQ Mechatronik-Systeme - W-TEC 15
 - Customer-specific connections optional
 - 1 x M12 IO link, A-coded
 - Optional 1x M12, A-coded, for additional input/output



Bauer Gear Motor Facilities

Europe

Germany

Eberhard-Bauer-Str. 37
73734 Esslingen - Germany
+49 711 3518 0

Slovakia

Továrenská 49
953 01 Zlaté Moravce - Slovakia
+421 37 6926100

United Kingdom

Unit 1, Nat Lane Business Park
Winsford, Cheshire
CW7 3BS - United Kingdom
+44 1606 868600

North America

Charlotte, NC

701 Carrier Drive
Charlotte, NC 28216 - USA
+1 800-387-0130

Asia Pacific

China

18 Huanzhen Road,
Dabo Industry Zone ,
Shajing Town - Baoan District,
Shenzhen City
Guangdong Province, China
+86 400 886 0365

Customer Service

Belgium

1702 Groot-Bijgaarden
+32 2 89372080

Finland

01530 Vantaa
+358 207 189700

France

1702 Groot-Bijgaarden
+32 2 89372080

Italy

35020 Padova (PD)
+39 049 8792327

China

Suite 301, #5 Lihpao Plaza,
88 Shen bin Road, Min hang District,
201106 Shanghai, China
Sales Enquiry : +86 (21) 5169 9255
Service hotline : +86 187 0171 2972



Scan to see all
the brands of
Regal Rexnord

Neither the accuracy nor completeness of the information contained in this publication is guaranteed by the company and may be subject to change in its sole discretion. The operating and performance characteristics of these products may vary depending on the application, installation, operating conditions and environmental factors. The company's terms and conditions of sale can be viewed at <https://www.bauergears.com/terms-and-conditions/sales-terms-and-conditions>. These terms and conditions apply to any person who may buy, acquire or use a product referred to herein, including any person who buys from a licensed distributor of these branded products.

©2024 by Bauer Gear Motor GmbH. All rights reserved. All trademarks in this publication are the sole and exclusive property of Bauer Gear Motor GmbH or one of its affiliated companies.

Images: Fotolia, Adobe Stock, Regal Rexnord and Bauer Archives