



STAINLESS STEEL POWER TRANSMISSION PRODUCTS

GEAR DRIVES / MOTORS & GEAR MOTORS /
BEARINGS & COUPLINGS



**IP67 and
IP69K
Products**

Expanded Stainless Steel Offering **NEW**



New 2nd Generation Design for SS700

- Larger hollow bore options in smaller units provide reduced envelope, weight and cost.
- New features: field-detachable output flange; shaft covers; new shaft options (including a Tapered Bushing for keyless, full torque transmission)

New Sizes of SS2000R Series - Helical Bevel

- Compact 2033R frame size with full compliment of mounting options
- Rugged 2073R frame size has expanded torque capacity and hollow output shaft bore sizes up to 2.000 inches




New Helical Multiplier

- C-Face mounts to any SS700, SS2000R or SS2000 product for more flexible ratio expansion
- Range of low ratios can be used as compact, stand-alone speed reducer for low reduction requirements

New AQT AquaTRUE™ Planetary Gearhead

- RediMount™ design for use with servo motors in precision applications
- 4 frame sizes with ratios from 3:1 thru 100:1

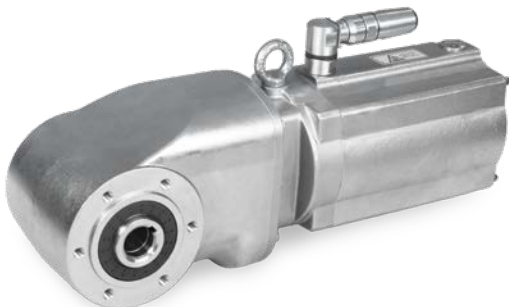

New SS Hiflex Helical Bevel Gear Motors

- 3 frame sizes with integrated motor options including asynchronous and permanent magnet
- Non-vented, totally-enclosed exterior with ability to integrate a brake or encoder

New SS AC Motor Design

- Welded and rounded conduit box for better sealing and washdown runoff
- Stainless slinger to protect shaft seal
- New size: 1/3 HP



Table Of Contents

Section

Pages

New Products

1

GEAR DRIVES

RIGHT ANGLE

A1

Worm Gear
Economical, Compact, High Reduction

Selection3-8
Single Reduction9-14
Double Reduction.....14-16



A2

Helical Bevel
High Efficiency, High Torque

Selection18-22
Three Reduction23-29
Four Reduction.....30-31



INLINE

B1

Helical Inline
High Efficiency, High Torque

Selection32-36
Two/Three Reduction37-42



B2

Helical Multiplier
Parallel Shaft, Range of Low Reduction Ratios

Helical Multiplier.....44-46



B3

Planetary Multiplier
Inline, Smooth, Low Reduction Ratio

Planetary Multiplier48-50



B4

Planetary Gearhead
High Precision, Low Backlash, Compact

Selection52-54
Single/Double-Stage
Reduction55-58



GEAR MOTORS

C

Helical Bevel
High Efficiency, High Performance
Integrated Motors

Selection60-62
Two/Three-Stage
Reduction63-66



MOTORS AND POWER TRANSMISSION COMPONENTS

D

AC Motors

AC Motors68-70



E

Mounted Bearings

Mounted Bearings72-79



F

Couplings, Universal Joints & Shaft Accessories

Couplings80-84
Universal Joints85-87
Shaft Accessories.....88-91



The new generation of Boston Gear's SS700 series stainless steel worm gearboxes package the form-fit-function of the original stainless steel speed reducers, with new upgrades and improvements.



- **Improved Domed Crown™** Curved Design offers ease of cleaning in the Food & Beverage industry
- **Larger Output Shaft Bore Sizes** for Smaller Speed Reducer Selection
- **IP69K Rated Stainless Steel** Enclosures for Gear Drive
- **Field-Installable Shaft Covers** for Speed Reducer
- **Lowest Operating Temperatures** Available*
- **Backwards Compatible** with original SS700 Stainless Steel Reducers

* when compared to like products

GEN 2 SS700 is the optimal solution for many applications within multiple food and beverage sectors and other related industries:



Meat



Poultry



Seafood



Pet Food



Fruit & Vegetables



Snack



Bakery



Grain



Dairy



Beverage



Chemical



Pharmaceutical

A1 SS700 Series Worm Gear Speed Reducers

Ordering Information

Single Reduction Worm Speed Reducer

Example: **SSHF7180B-40KC-B5-HS1-P20-FUTSS-3**

SS	H	F	7	180	B	-	40	K
Style Blank – Solid Output Shaft H – <i>BostMount</i> Hollow Output	Center Distance (Inches) 13 – 1.33 15 – 1.54 180 – 1.75 210 – 2.06 240 – 2.38 260 – 2.62 320 – 3.25	Base Blank – No Base B – Horizontal Base V – Output Flange - Right Mount W – Output Flange - Left Mount F – Output Flange holes (No Flange Included)	Reduction Ratio To 1 5 10 15 20 25 30 40 50 60 80 100	Lubrication K – Klubersynth UH1-6-460 (PAG) D – Mobil Cibus SHC 460 (PAO) H1 Food-Grade				
SS – Stainless Steel Material	700 Series							

Double Reduction Worm - Multiplier Speed Reducer




Example: **SSHFWP7320B-300KT-B5-HS1-P20**

SS	H	F	WP	7	32	B	-	300
	Style Blank – Solid Output Shaft H – <i>BostMount</i> Hollow Output	F – Quill Style Motor Flange QC – Quick Connect Motor Flange (Close Coupled)	Multiplier WP – Planetary Multiplier HM – Helical Multiplier	700 Series	Center Distance (Inches) 13 – 1.33 15 – 1.54 180 – 1.75 210 – 2.06 240 – 2.38 260 – 2.62 320 – 3.25	Base Blank – No Base B – Horizontal Base V – Output Flange - Right Mount W – Output Flange - Left Mount F – Output Flange holes (No Flange Included)		Reduction Ratio To 1 75 100 150 200 250 300 400 500
SS – Stainless Steel Material								

Double Reduction Worm - Worm Speed Reducer

Example: **SSHFWB7320B-3600KT-B5-LS1-P20**

SS	H	F	WB	7	32	B	-	3600
	Style Blank – Solid Output Shaft H – <i>BostMount</i> Hollow Output	F – Quill Style Motor Flange QC – Quick Connect Motor Flange (Close Coupled)	Input & Output Style WB – Double Reduction Parallel Shafts WD – Double Reduction Right Angle Shafts	700 Series	Center Distance (Inches) 13 – 1.33 15 – 1.54 180 – 1.75 210 – 2.06 240 – 2.38 260 – 2.62 320 – 3.25	Base Blank – No Base B – Horizontal Base V – Output Flange - Right Mount W – Output Flange - Left Mount F – Output Flange holes (No Flange Included)		Reduction Ratio To 1 100 150 200 300 400 600 900 1200 1800 2000 2400 3000 3600
SS – Stainless Steel Material								

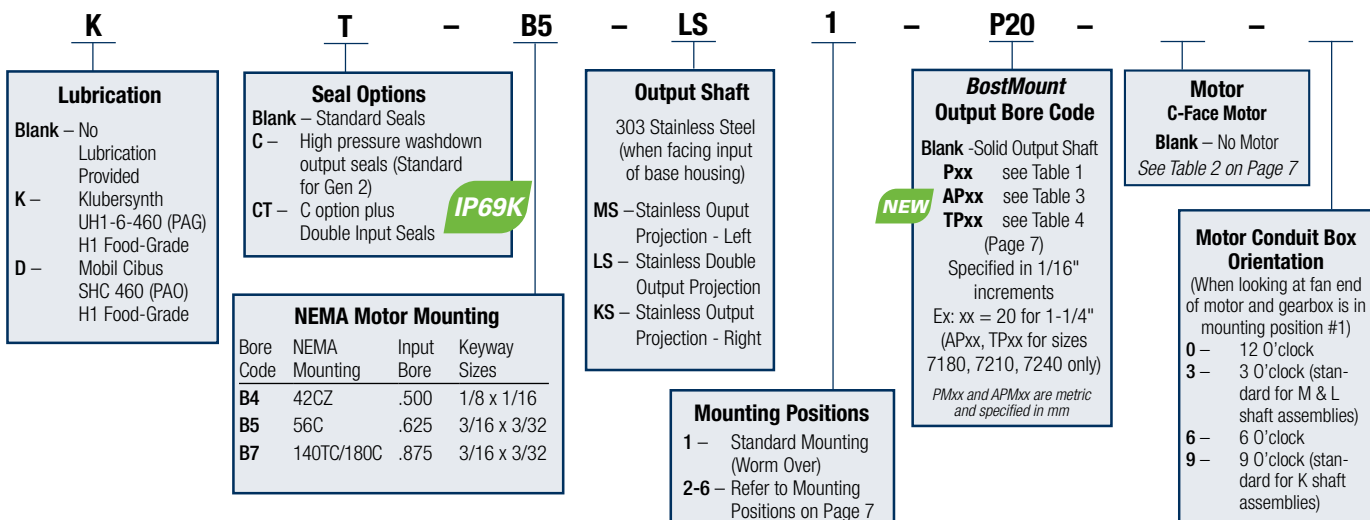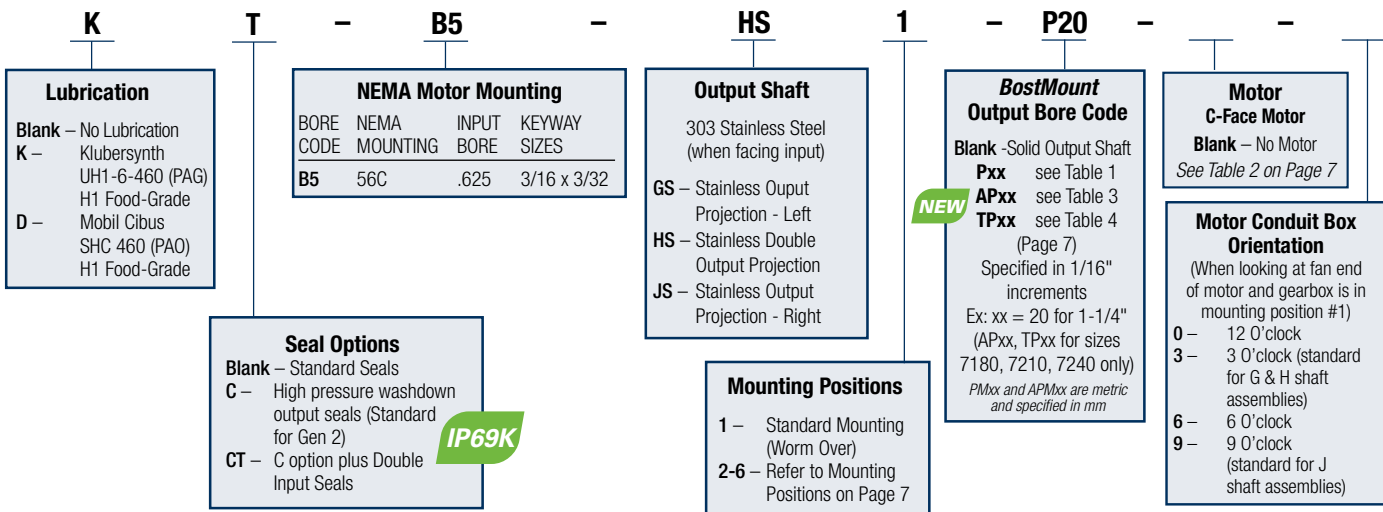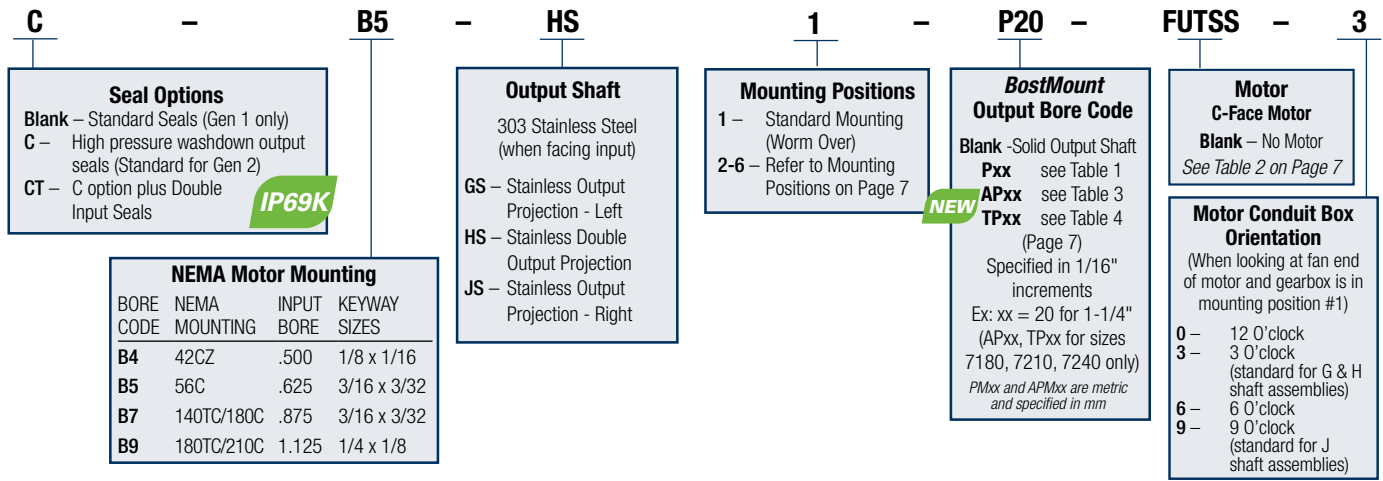

Ordering Information

Horizontal Base Kits for SS700 Series

(If ordered separately)

Size	Kit
713	J00877 XSS713-11H-BK
715	J00878 XSS715-11H-BK
7180	J00304 XSS718-11H-BK
7210	J00305 XSS721-11H-BK
7240	J00879 XSS724-11H-BK
7260	J00306 XSS726-11H-BK
7320	J00307 XSS732-11H-BK

Kit includes (2) feet, (4) attaching bolts and (4) hardware covers.

Stainless Steel Shaft Covers for SS700 Series

(Sold separately. Field installable and removable)

Size	Catalog Number
7180	XHSS7180-33-KIT
7210	XHSS7210-33-KIT
7240	XHSS7240-33-KIT
7260	XHSS7260-33-KIT
7320	XHSS7320-33-KIT

Gen1 Replacement Hardware Covers

Size	Housing Oil Plugs	Bearing Carrier	Mounting Feet	Output Flange	Motor Flange B5/B7 (56C/140TC)	Motor Flange B9 (180TC)
713	J00195	N/A	N/A	J00195	J00195	J00195 & J00196
715	J00195	J00195	J00196	J00195	J00195	J00195 & J00196
718	J00195	J00195	J00196	J00195	J00195	J00195 & J00196
721	J00195	J00195	J00196	J00195	J00195	J00195 & J00196
724	J00195	J00195	J00196	J00195	J00195	J00195 & J00196
726	J00195	J00195	J00196	J00195	J00195	J00195 & J00196
732	J00195	J00195	J00196	J00196	J00195	J00195 & J00196

J00195 has nominal O.D. of 0.605"

J00196 has nominal O.D. of 0.812"

Material: Stainless Steel disk (metal detectable) with over-molded rubber

Hardware Covers are not used on sizes 7180, 7210, 7240, 7260 and 7320.

Table 1: Hollow Output P-Shaft Bore Codes with Setscrews

Output Bore Size	Decimal Size*	Output Bore Code	713	715	7180	7210	7240	7260	7320	Key Size†
5/8	.6250	P10	S							.187 x .125 x 1.000
3/4	.7500	P12	•	•	•					.187 x .156 x 1.000
7/8	.8750	P14	•	•	•					.187 x .156 x 1.000
15/16	.9375	P15	•	•	•					.250 x .218 x 1.375
1	1.0000	P16	S	S	S	S	S	•		.250 x .218 x 1.375
1-1/8	1.1250	P18			•	•	•	•		.250 x .218 x 1.375
1-3/16	1.1875	P19			•	S	S	•		.250 x .218 x 1.375
1-1/4	1.2500	P20		NEW	S	S	S	•		.250 x .218 x 1.375
1-7/16	1.4375	P23				S	S	S	S	.375 x .312 x 1.750
1-1/2	1.5000	P24				S	NEW	S	S	.375 x .312 x 1.750
1-15/16	1.9375	P31						•	S	.500 x .375 x 2.000
2	2.0000	P32					NEW	•	•	.500 x .375 x 2.000
2-3/16	2.1875	P35						•	•	.500 x .375 x 2.000
2-1/4	2.2500	P36						NEW	•	.500 x .375 x 2.000
18MM		PM18			•					6mm x 6mm x 32mm
20MM		PM20			•	•	•			6mm x 6mm x 32mm
25MM		PM25			•	•	•	NEW	•	8mm x 7mm x 50mm
30MM		PM30			•	•	•	NEW	•	8mm x 7mm x 50mm
35MM		PM35			•	•	•	NEW	•	10mm x 8mm x 45mm
40MM		PM40					•	NEW	•	10mm x 8mm x 45mm
45MM		PM45						•	NEW	10mm x 8mm x 45mm
50MM		PM50						•	NEW	10mm x 8mm x 45mm

*Bore tolerance +.0015 / - .0000

S Standard Bore – Included in Express Program

• Optional Bore

† Rectangular key is provided with reducer to fit hollow shaft. Driven shaft requires a standard square keyway width and depth.

Note: For all other bore sizes, contact factory.

Table 2: Stainless Steel AC Motors

Part #	HP	Type	Frame Size
EUT-SS	0.33	TENV	56C
FUT-SS	0.5	TENV	56C
NEW FYTF-SS	0.5	TEFC	56C
NEW FYTF-SS	0.5	TEFC	56C
GUT-SS	0.75	TENV	56C
HUT5/8-SS	1.0	TENV	56C
HUTF5/8-SS	1.0	TEFC	56C
NEW HYTF5/8-SS	1.0	TEFC	56C
HUT-SS	1.0	TENV	140TC
HUTF-SS	1.0	TEFC	140TC
JUTF-SS	1.5	TEFC	140TC
KUTF-SS	2.0	TEFC	140TC
LUTF-SS	3.0	TEFC	180TC
MUTF-SS	5.0	TEFC	180TC

All above motors are 230/460V except FYTF-SS and HYTF5/8-SS which are 575V

TENV = Totally enclosed, non-ventilated

TEFC = Totally enclosed, fan-cooled

Table 4: SS7000 Hollow Output TP-Shaft Bore Codes with Tapered Bushing

Output Bore Size	Decimal Size	Output Bore Code	7180 *	7210 *	7240 *	7260 **	7320 **
1	1.0000	TP16	S	•	•	•	
1-1/4	1.2500	TP20	S	S	S	•	•
1-7/16	1.4375	TP23		S	S	•	•
1-1/2	1.5000	TP24				•	•
1- 5/8	1.6260	TP26				•	•
1 - 3/4	1.7500	TP28				•	•
1 - 7/8	1.875	TP30				•	•
1-15/16	1.9375	TP31					•
2	2.0000	TP32					•

* Tapered Bushing can be removed using the 5/8-11 tapped hole provided in bushing.

** Tapered Bushing can be removed using the 3/4-10 tapped hole provided in bushing.

Table 5: Hollow Output AP-Shaft Details

Unit Size	Draw -Up Bolt Size	Draw-Up Bolt Torque (-0 / +1 lbs-ft)
7180	1/2 -13	46 lbs-ft
7210	1/2 -13	55 lbs-ft
7240	1/2 -13	55 lbs-ft
7260	5/8 -11	88 lbs-ft
7320	5/8 -11	88 lbs-ft

Table 3: Hollow Output AP-Shaft Bore Codes with Draw Bolt


Output Bore Size	Decimal Size*	Output Bore Code	7180	7210	7240	7260	7320	Key Size†
1	1.0000	AP16	S	•	•	•		.250 x .218 x 1.375
1-1/4	1.2500	AP20	S	S	S	•		.250 x .218 x 1.375
1-7/16	1.4375	AP23		•	•	•		.375 x .312 x 1.750
1-1/2	1.5000	AP24		S	S	•		.375 x .312 x 1.750
1-15/16	1.9375	AP31				•	•	.500 x .375 x 2.000
2	2.0000	AP32				•	•	.500 x .375 x 2.000
25MM		APM25	S			•		8mm x 7mm x 50mm
30MM		APM30	S	S	S	•		8mm x 7mm x 50mm
35MM		APM35		S	S	•		10mm x 8mm x 45mm
40MM		APM40				•	•	10mm x 8mm x 45mm
45MM		APM45				•	•	10mm x 8mm x 45mm
50MM		APM50					•	10mm x 8mm x 45mm

M = mm versions

Installation Mounting Positions & Lubrication

Oil Levels For Typical Mounting Positions

(Examples shown for single-reduction models only)

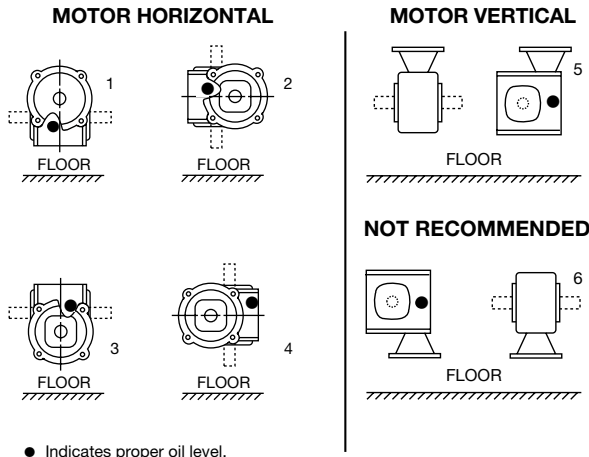

NOTE: Double input seals are required for all positions except #1 and #5.

Enclosed Worm Gear Reducers Lubricant Available from Boston Gear

Recommended Oil (or equivalent)	Viscosity Range SUS @ 100°F	ISO Viscosity Grade No.	Quart-Size Container Part No.
Klubersynth* UH1 6-460 (PAG) Synthetic H1 Food Grade Oil	1950/2500	460	65159
Mobil Cibus SHC 460 (PAO) Synthetic H1 Food Grade Oil	1950/2500	460	G06427

Ambient temperature range of -20°F to +125°F is suitable for standard configured products and ratings. Contact technical support for operating conditions beyond this range.

* Synthetic recommendation is exclusively Klubersynth UH1 6-460, other lubricants will reduce performance ratings.

** The Klubersynth UH1 6-460 lubricant will perform at temperatures considerably higher than 225°F. However, the factory should always be consulted prior to operating at higher temperatures, as damage may occur to oil seals and other components.

Oil Capacity in Fluid Ounces

Unit Size	Positions					
	1	2	3	4	5	6
713	3	3	3	3	3	3
715	11	14	17	14	14	14
7180	9	9	9	9	9	9
7210	14	14	14	14	14	14
7240	14	17	17	17	17	17
7260	20	20	20	20	20	20
7320	45	45	45	45	45	45

Double reduction stainless gearboxes require the primary and secondary boxes to be filled independently to their respective mounting position.

NEW Tapered Bushing Installation and Removal

1. Measure and mark distance Y2 of machine shaft. This measurement locates the end of the pilot bushing from the end of the customer's solid shaft.
2. Carefully align the end of pilot bushing on mark from step 1. The tapered side should face the gearbox.
3. Secure locking collar by tightening cap screw to correct torque setting (See chart for torque setting).
4. Slide reducer onto pilot bushing.
5. Slide tapered bushing into reducer bore.
6. Insert Draw up bolt through the tapered bushing and into the customer's shaft.
7. Tighten Draw up bolt to the correct torque setting (See chart).

Unit Size	Distance Y2 +/- .015"	Pilot Bushing Cap Screw Torque (-0 / +1 lbs-ft)	Draw-Up Bolt Size	Draw-Up Bolt Torque (-0 / +1 lbs-ft)
7180	5 - 11/16"	15 lbs-ft	1/2 -13	46 lbs-ft
7210	6 - 3/8"	29 lbs-ft	1/2 -13	55 lbs-ft
7240	6 - 3/8"	29 lbs-ft	1/2 -13	55 lbs-ft
7260	6 - 11/16"	29 lbs-ft	5/8 -11	88 lbs-ft
7320	*	29 lbs-ft	5/8 -11	88 lbs-ft



Note: Components to be clean and dry. Position Y2 is critical to prevent the tapered bushing from bottoming out on machine shaft. The customer's shaft must be allowed to float axially during the gearbox mounting procedure.

* For bore sizes TP16 thru TP24 Y2 = 7-7/16"
For bore sizes TP30 and up Y2 = 7-5/8"



To Remove Reducer:

1. Loosen and remove Draw up bolt.
2. Thread appropriate size bolt into tapered bushing (Not supplied). Typically, one thread size larger than the Draw up bolt.
3. Tighten bolt until tapered bushing slides out of bore.
4. Remove reducer from pilot bushing (Use of appropriate "drift" may help facilitate removal of reducer from pilot bushing).

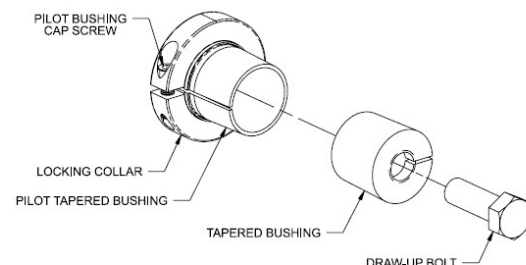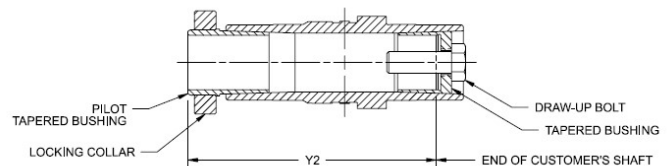

A1 SS700 Series Single Reduction

Ratios and Performance

Single Reduction

Series Size			713			715			7180			7210			7240			7260			7320		
Ratio	Input RPM	Output RPM	Input HP	Output Torque		Input HP	Output Torque		Input HP	Output Torque		Input HP	Output Torque		Input HP	Output Torque		Input HP	Output Torque		Input HP	Output Torque	
				HP	(in-lbs)		HP	(in-lbs)		HP	(in-lbs)		HP	(in-lbs)		HP	(in-lbs)		HP	(in-lbs)		HP	(in-lbs)
5	1750	350	1.39	1.31	235	1.72	1.62	291	2.55	2.40	432	3.66	3.44	620	4.94	4.65	838	6.11	5.74	1034	10.05	9.54	1716
	1150	230	0.84	0.73	200	1.15	1.04	285	1.42	1.28	350	2.33	2.10	575	3.05	2.74	750	4.05	3.64	1000	8.43	7.91	2165
	690	138	0.50	0.45	205	0.80	0.72	330	0.97	0.87	400	1.64	1.47	670	2.25	2.01	920	3.04	2.74	1250	6.53	6.02	2749
	100	20	0.09	0.08	240	0.14	0.12	370	0.17	0.14	460	0.30	0.26	820	0.43	0.38	1200	0.58	0.51	1600	1.38	1.19	3735
10	1750	175	0.86	0.78	281	1.20	1.10	397	1.61	1.49	536	2.34	2.19	789	3.18	2.97	1069	3.94	3.74	1345	6.22	5.85	2106
	1150	115	0.51	0.44	243	0.73	0.64	350	0.98	0.87	480	1.49	1.32	725	2.09	1.87	1025	2.82	2.54	1390	4.41	3.92	2150
	690	69	0.33	0.29	266	0.47	0.42	384	0.66	0.58	534	1.00	0.89	814	1.46	1.31	1200	1.97	1.75	1600	3.17	2.85	2600
	100	10	0.06	0.05	296	0.09	0.07	432	0.12	0.10	610	0.19	0.15	968	0.27	0.23	1430	0.37	0.31	1960	0.62	0.52	3300
15	1750	116.7	0.66	0.58	305	0.91	0.79	428	1.13	1.02	552	1.72	1.56	840	2.34	2.15	1159	2.95	2.71	1465	4.65	4.34	2344
	1150	76.7	0.37	0.32	262	0.53	0.46	376	0.67	0.57	472	1.06	0.91	752	1.51	1.29	1060	2.01	1.73	1425	3.15	2.74	2250
	690	46	0.26	0.21	288	0.36	0.30	415	0.46	0.39	534	0.72	0.61	832	1.05	0.90	1239	1.41	1.22	1675	2.35	2.04	2800
	100	6.7	0.05	0.03	322	0.07	0.05	468	0.09	0.06	597	0.13	0.10	968	0.19	0.15	1463	0.28	0.22	2057	0.48	0.39	3700
20	1750	87.5	0.52	0.43	308	0.72	0.60	435	0.97	0.82	590	1.40	1.24	892	1.95	1.71	1233	2.34	2.06	1483	3.71	3.35	2413
	1150	57.5	0.29	0.24	265	0.43	0.35	380	0.58	0.48	525	0.86	0.72	782	1.27	1.06	1160	1.63	1.36	1500	2.77	2.37	2600
	690	34.5	0.19	0.16	286	0.28	0.23	420	0.38	0.32	580	0.57	0.48	875	0.83	0.70	1280	1.11	0.94	1725	1.99	1.70	3100
	100	5	0.04	0.03	330	0.06	0.04	485	0.08	0.06	690	0.11	0.08	1018	0.17	0.12	1550	0.20	0.16	2050	0.41	0.30	3846
25	1750	70	0.43	0.34	307	0.60	0.49	437	0.76	0.64	574	1.16	0.97	875	1.55	1.33	1199	1.94	1.68	1514	3.08	2.71	2443
	1150	46	0.24	0.19	260	0.35	0.27	375	0.48	0.36	500	0.72	0.58	790	1.03	0.84	1150	1.31	1.11	1525	2.29	1.90	2600
	690	27.6	0.15	0.12	280	0.22	0.18	410	0.30	0.24	540	0.47	0.38	875	0.69	0.56	1280	0.93	0.77	1750	1.51	1.27	2900
	100	4	0.03	0.02	310	0.04	0.03	451	0.06	0.04	660	0.10	0.07	975	0.14	0.10	1500	0.18	0.13	2075	0.31	0.22	3500
30	1750	58.3	0.39	0.29	311	0.54	0.41	446	0.65	0.53	573	0.99	0.81	871	1.33	1.11	1200	1.68	1.41	1521	2.64	2.27	2456
	1150	38.3	0.21	0.16	270	0.31	0.23	388	0.40	0.32	530	0.62	0.48	795	0.89	0.70	1170	1.20	0.96	1575	2.80	2.23	2675
	690	23	0.14	0.11	300	0.20	0.17	460	0.29	0.22	600	0.41	0.32	880	0.60	0.47	1300	0.81	0.65	1790	1.41	1.16	3200
	100	3.3	0.03	0.02	340	0.04	0.03	496	0.06	0.04	710	0.09	0.06	1050	0.12	0.08	1500	0.16	0.11	2100	0.30	0.21	4000
40	1750	43.8	0.31	0.21	307	0.43	0.31	441	0.57	0.42	609	0.81	0.61	876	1.08	0.84	1206	1.33	1.05	1512	2.10	1.70	2444
	1150	28.8	0.18	0.12	265	0.24	0.17	380	0.33	0.24	525	0.49	0.36	785	0.70	0.53	1160	0.89	0.68	1500	1.52	1.19	2600
	690	17.3	0.10	0.08	286	0.15	0.11	420	0.22	0.16	580	0.33	0.24	875	0.46	0.35	1280	0.61	0.47	1725	1.08	0.85	3100
	100	2.5	0.03	0.01	330	0.04	0.02	485	0.05	0.03	690	0.07	0.04	1018	0.11	0.06	1550	0.14	0.08	2050	0.25	0.15	3846
50	1750	35	0.25	0.17	297	0.35	0.24	429	0.44	0.32	573	0.66	0.48	857	0.87	0.65	1177	1.08	0.82	1484	1.70	1.33	2403
	1150	23	0.12	0.09	248	0.18	0.13	360	0.24	0.17	470	0.38	0.27	750	0.56	0.40	1100	0.75	0.54	1482	1.21	0.89	2450
	690	13.8	0.08	0.06	265	0.12	0.09	390	0.17	0.12	520	0.26	0.18	840	0.37	0.26	1225	0.51	0.37	1675	0.87	0.61	2800
	100	2	0.02	0.01	300	0.03	0.01	440	0.04	0.02	590	0.06	0.03	970	0.08	0.05	1425	0.11	0.06	1975	0.19	0.10	3325
60	1750	29.2	0.22	0.13	271	0.28	0.18	399	0.35	0.24	527	0.55	0.38	826	0.73	0.52	1128	0.89	0.64	1385	1.40	1.06	2281
	1150	19.2	0.17	0.09	201	0.16	0.10	312	0.21	0.13	440	0.34	0.22	730	0.49	0.32	1040	0.64	0.42	1390	1.05	0.70	2300
	690	11.5	0.10	0.05	253	0.11	0.06	338	0.14	0.08	480	0.23	0.15	805	0.33	0.21	1154	0.44	0.29	1570	0.71	0.48	2650
	100	1.7	0.02	0.01	285	0.022	0.01	371	0.03	0.01	530	0.06	0.03	930	0.07	0.04	1330	0.10	0.05	1840	0.16	0.08	3100
80	1750	21.9	0.15	0.08	222	0.21	0.11	318	0.23	0.13	375	0.38	0.22	634	-	-	-	0.76	0.38	1100	0.95	0.62	1795
	1150	14.4	0.12	0.06	246	0.17	0.08	358	0.16	0.09	390	0.31	0.17	734	-	-	-	0.47	0.29	1252	0.81	0.50	2171
	690	8.6	0.09	0.04	266	0.12	0.05	392	0.10	0.05	350	0.23	0.11	819	-	-	-	0.35	0.18	1340	0.61	0.34	2512
	100	1.3	0.02	0.01	293	0.03	0.01	440	0.02	0.01	470	0.05	0.02	942	-	-	-	0.07	0.03	1600	0.14	0.06	3030
100	1750	17.5	0.08	0.04	138	0.15	0.07	251	0.17	0.09	323	0.27	0.14	503	-	-	-	0.39	0.21	757	0.65	0.39	1414
	1150	11.5	0.07	0.028	152	0.12	0.05	283	0.14	0.07	360	0.22	0.11	580	-	-	-	0.34	0.17	913	0.56	0.31	1711
	690	6.9	0.05	0.02	164	0.09	0.03	309	0.10	0.04	391	0.16	0.07	646	-	-	-	0.26	0.12	1054	0.43	0.22	1980
	100	1	0.01	0.00	180	0.02	0.01	347	0.02	0.01	435	0.04	0.01	744	-	-	-	0.06	0.02	1267	0.10	0.04	2387
Overhung Load*			200 lbs			300 lbs			500 lbs			700 lbs.			900 lbs			1000 lbs			1300 lbs		
Output Shaft Thrust Load			300 lbs			400 lbs			500 lbs			700 lbs			800 lbs			900 lbs			1100 lbs		

Ratings shown reflect maximum gear capacity based on AGMA standards (Service Factor = 1.0) with Klubersynth UH1 6-460.

*Overhung Load is at centerline of output shaft projection and with NO THRUST Load.

Note: For input speeds above 1750 RPM, do NOT exceed maximum listed input horsepower.

Ratios and Performance

Worm-Planetary Double Reduction (WP)

Series Size			SS_WP713			SS_WP715			SS_WP7180			SS_WP7210			SS_WP7240			SS_WP7260			SS_WP7320		
Ratio	Input RPM	Output RPM	Input HP	Output		Input HP	Output		Input HP	Output		Input HP	Output		Input HP	Output		Input HP	Output		Input HP	Output	
				HP	Torque (in-lbs)		HP	Torque (in-lbs)		HP	Torque (in-lbs)		HP	Torque (in-lbs)		HP	Torque (in-lbs)		HP	Torque (in-lbs)		HP	Torque (in-lbs)
75	1750	23.3	0.15	0.11	293	0.24	0.16	446	0.27	0.21	570	0.44	0.34	910	0.66	0.51	1367	0.75	0.57	1542	0.75	0.57	1542
100	1750	17.5	0.13	0.09	311	0.19	0.13	457	0.25	0.18	643	0.38	0.27	957	0.56	0.40	1435	0.74	0.53	1912	0.75	0.54	2072
150	1750	11.7	0.10	0.06	300	0.16	0.09	509	0.18	0.12	663	0.26	0.18	978	0.40	0.26	1415	0.53	0.36	1969	0.75	0.51	2747
200	1750	8.8	0.08	0.04	309	0.13	0.07	520	0.14	0.09	643	0.20	0.13	957	0.35	0.20	1435	0.42	0.27	1912	0.75	0.49	3509
250	1750	7	0.07	0.03	312	0.11	0.06	505	0.10	0.06	560	0.16	0.10	915	0.27	0.15	1340	0.33	0.21	1848	0.54	0.34	3103
300	1750	5.8	0.06	0.03	273	0.09	0.04	477	0.09	0.05	510	0.15	0.08	877	0.24	0.12	1255	0.30	0.16	1726	0.50	0.27	2909
400	1750	4.4	0.05	0.02	251	0.08	0.03	419	0.07	0.03	413	0.13	0.06	890	-	-	-	0.22	0.10	1490	0.44	0.20	2811
500	1750	3.5	0.03	0.01	197	0.05	0.02	330	0.05	0.02	416	0.09	0.04	702	-	-	-	0.16	0.07	1177	0.28	0.12	2215
Overhung Load*			200 lbs			300 lbs			500 lbs			700 lbs			900 lbs			1000 lbs			1300 lbs		
Output Shaft Thrust Load			300 lbs			400 lbs			500 lbs			700 lbs			800 lbs			900 lbs			1100 lbs		

Stand-Alone Planetary			SSFSP5 and SSFSP5A		
Ratio	Input RPM	Output RPM	Input HP	Output	
				HP	Torque (in-lbs)
5	1750	350	0.75	0.69	124

Ratings shown reflect maximum gear capacity based on AGMA standards (Service Factor = 1.0) with Klubersynth UH1 6-460.

Worm-Planetary and Stand-Alone Planetary gearing is not recommended for use in applications with repetitive vibrational or impact loading.

*Overhung Load is at centerline of output shaft projection and with NO THRUST Load.

Note: For input speeds above 1750 RPM, do NOT exceed maximum listed input horsepower.

Worm-Worm Double Reduction (WB & WD)

Series Size			SS_WB/WD713			SS_WB/WD7180			SS_WB/WD7210			SS_WB/WD7260			SS_WB/WD7320		
Ratio	Input RPM	Output RPM	Input HP	Output		Input HP	Output		Input HP	Output		Input HP	Output		Input HP	Output	
				HP	Torque (in-lbs)		HP	Torque (in-lbs)		HP	Torque (in-lbs)		HP	Torque (in-lbs)		HP	Torque (in-lbs)
100	1750	17.5	0.16	0.08	275	0.23	0.16	570	0.41	0.25	910	0.75	0.50	1785	1.33	0.96	3450
150	1750	11.7	0.13	0.05	280	0.23	0.11	580	0.30	0.17	940	0.56	0.34	1840	1.00	0.67	3600
200	1750	8.8	0.12	0.05	320	0.19	0.09	660	0.25	0.14	990	0.47	0.26	1875	0.81	0.53	3800
300	1750	5.8	0.10	0.03	335	0.16	0.06	690	0.20	0.09	1025	0.37	0.18	1950	0.61	0.36	3950
400	1750	4.4	0.09	0.02	330	0.12	0.05	690	0.17	0.02	1025	0.31	0.14	1950	0.48	0.27	3900
600	1750	2.9	0.08	0.02	340	0.10	0.03	710	0.13	0.05	1025	0.25	0.09	2000	0.36	0.18	4025
900	1750	1.9	0.07	0.01	340	0.08	0.02	710	0.11	0.03	1050	0.21	0.06	2000	0.28	0.12	4025
1200	1750	1.5	0.07	0.01	330	0.07	0.02	690	0.10	0.02	1025	0.19	0.05	1950	0.23	0.09	3900
1800	1750	1	-	-	-	-	-	-	0.08	0.01	900	0.16	0.03	1775	0.19	0.06	3750
2000	1750	0.9	-	-	-	0.052	0.008	590	-	-	-	0.16	0.03	1940	0.22	0.05	3880
2400	1750	0.7	-	-	-	-	-	-	0.05	0.01	900	0.15	0.02	1864	0.17	0.04	3143
3000	1750	0.6	-	-	-	-	-	-	-	-	-	0.14	0.02	1800	0.15	0.04	3750
3600	1750	0.5	-	-	-	-	-	-	-	-	-	0.13	0.01	1865	0.14	0.02	3154
Overhung Load*			200 lbs.			500 lbs.			700 lbs.			1000 lbs.			1300 lbs.		
Output Shaft Thrust Load			300 lbs.			500 lbs.			700 lbs.			900 lbs.			1100 lbs.		

Ratings shown reflect maximum gear capacity based on AGMA standards (Service Factor = 1.0) with Klubersynth UH1 6-460.

*Overhung Load is at centerline of output shaft projection and with NO THRUST Load.



Note: For input speeds above 1750 RPM, do NOT exceed maximum listed input horsepower.

A1 SS700 Series Single Reduction, With and Without Base


Dimensions




SSHF700 & SSHQC700 without Base Hollow Output Shaft with Setscrews Option

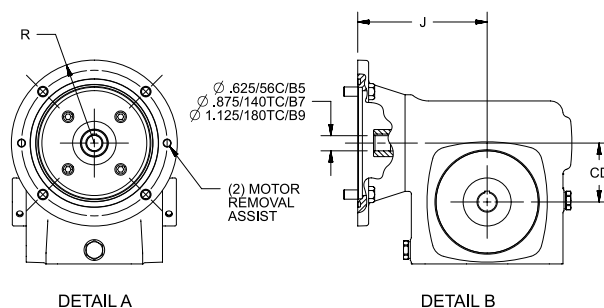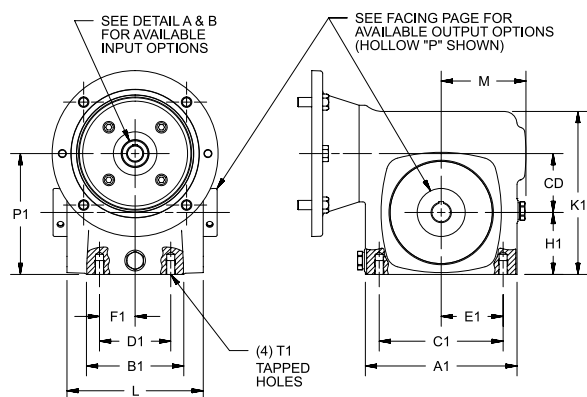

SSHF700 & SSHQC700 with Base Hollow Output Shaft with Setscrews Option

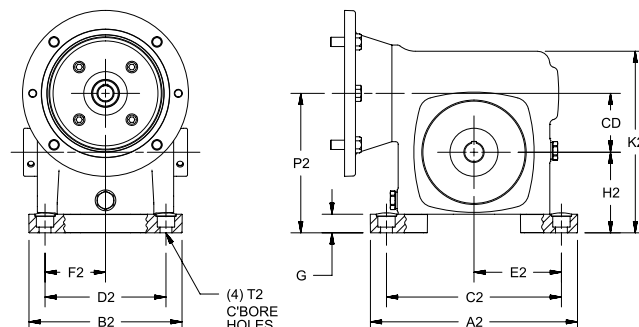

"QC" Quick Connect Input

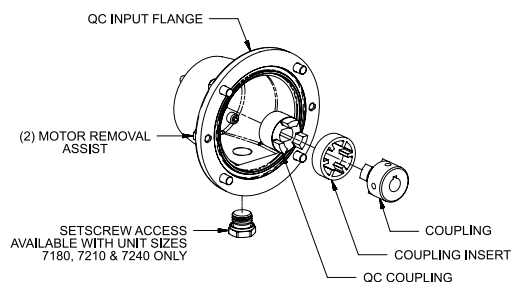


SIZE	C.D.	A1	B1	C1	D1	E1	F1	H1	J			
									F STYLE (QUILL)		QC STYLE	
									56C/140TC	180TC	56C/140TC	180TC
713	1.33	4.35	2.87	3.25	2.00	1.63	1.00	1.72	3.94	-	5.46	-
715	1.54	5.26	3.69	4.19	2.75	2.09	1.38	1.91	4.50	-	6.11	-
7180	1.75	5.25	3.68	4.19	2.75	2.09	1.38	2.06	4.78	-	6.46	-
7210	2.06	6.12	3.90	5.00	2.88	2.50	1.44	2.28	5.04	-	6.72	-
7240	2.38	6.12	3.93	5.00	2.88	2.50	1.44	2.50	5.22	-	6.90	-
7260	2.62	7.50	4.45	6.38	3.38	3.19	1.69	2.94	5.78	6.22	7.32	8.50
7320	3.25	8.80	5.20	7.50	4.00	3.75	2.00	3.50	6.56	7.00	8.10	9.28


SIZE	K1	L	M	P1	R		T1	Approx. Weight (lbs.)			
					56C/140TC	180TC		SSF700	SSHF700	SSF700B	SSHF700B
713	4.27	3.75	2.18	3.06	3.33	-	5/16-18 x 0.50 DP	13	15	15	17
715	5.48	4.80	2.63	3.44	3.33	-	5/16-18 x 0.46 DP	21	24	23	26
7180	5.31	5.00	2.95	3.81	3.35	-	5/16-18 x 0.50 DP	24	23	27	26
7210	6.04	5.38	3.38	4.34	3.35	-	3/8-16 x 0.56 DP	28	27	31	30
7240	6.58	5.50	3.42	4.88	3.35	-	3/8-16 x 0.56 DP	35	34	39	38
7260	7.41	5.88	4.08	5.56	3.35	4.62	3/8-16 x 0.54 DP	45	43	49	47
7320	8.60	6.50	4.78	6.75	3.35	4.62	7/16-14 x 0.74 DP	67	64	74	71

SIZE	C.D.	A2	B2	C2	D2	E2	F2	G	H2	K2	P2	T2
713	1.33	5.25	4.19	4.38	3.31	2.19	1.66	0.53	2.25	4.80	3.59	0.53/0.34
715	1.54	6.46	5.50	5.25	4.31	2.63	2.16	0.60	2.50	6.08	4.06	0.61/0.42
7180	1.75	7.00	5.75	5.75	4.50	2.87	2.25	0.68	2.75	6.00	4.50	0.61/0.42
7210	2.06	7.62	5.94	6.38	4.69	3.19	2.34	0.71	3.00	6.75	5.06	0.70/0.48
7240	2.38	8.37	6.19	7.06	4.88	3.53	2.44	0.75	3.25	7.33	5.63	0.70/0.48
7260	2.62	9.25	6.50	8.00	5.25	4.00	2.63	0.74	3.68	8.15	6.31	0.79/0.54
7320	3.25	11.00	7.62	9.50	6.13	4.75	3.06	0.87	4.37	9.47	7.63	0.79/0.54

Projecting Output Shaft Details




SINGLE PROJECTION
SOLID OUTPUT SHAFT (GS/JS)

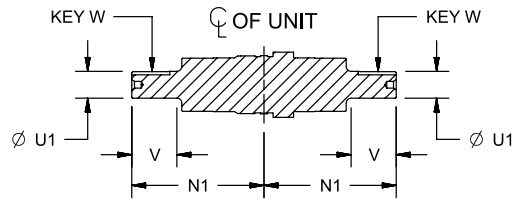



DOUBLE PROJECTION
SOLID OUTPUT SHAFT (HS)





Hollow Output Shaft with Setscrews P-Shaft

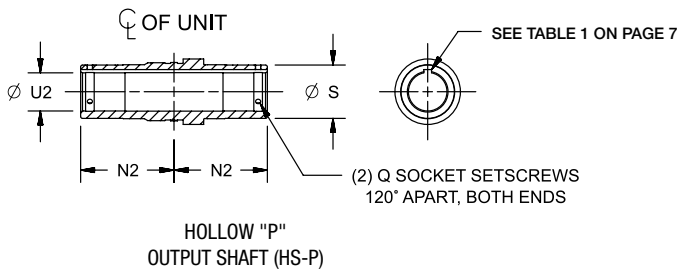

NEW Hollow Output Shaft with Draw Bolt AP Shaft

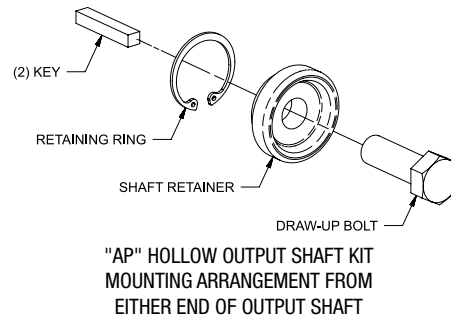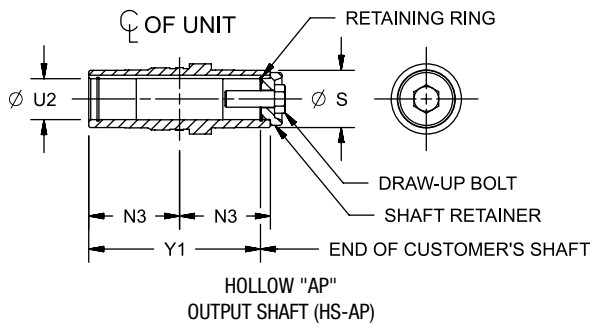

NEW Hollow Output Shaft with Keyless Tapered Bushing TP Shaft

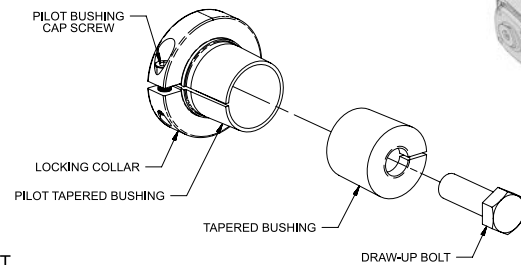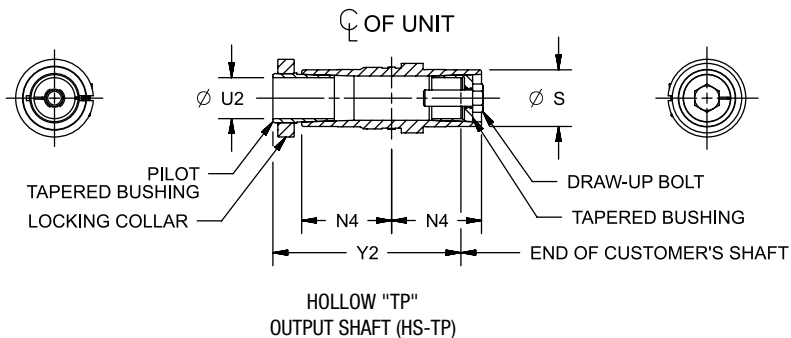


SIZE	CENTER LINE OF UNIT TO END OF SHAFT				Q	S	U1	MAX U2	V	W	Y1	Y2	Key Size
	N1	N2	N3	N4									
713	4.00	2.50	-	-	#10-32	1.38	0.625	1.0000	2.00	3/16 x 1	-	-	*
715	4.31	3.03	-	-	#10-32	1.38	0.750	1.0000	1.78	3/16 x 1	-	-	*
7180	4.31	3.03	2.75	2.75	#10-32	1.73	0.875	1.2500	1.47	3/16 x 1	5.20	5-11/16	*
7210	4.69	3.31	3.00	3.00	1/4-28	1.94	1.000	1.5000	1.66	1/4 x 1-1/4	5.70	6-3/8	*
7240	5.09	3.31	3.00	3.00	1/4-28	1.94	1.125	1.5000	2.00	1/4 x 1-1/4	5.70	6-3/8	*
7260	5.63	3.50	3.12	3.12	5/16-24	2.44	1.125	2.0000	2.41	1/4 x 1-15/16	5.93	6-11/16	*
7320	7.06	4.00	3.50	3.50	5/16-24	2.83	1.375	2.2500	3.40	5/16 x 2-7/16	6.67	**	*

* Refer to Table 1 on page 7.

** For bore sizes TP16 thru TP24 Y2 = 7-7/16; For bore sizes TP30 and up Y2 = 7-5/8

A1 SS700 Series Single Reduction

Shaft Cover Option

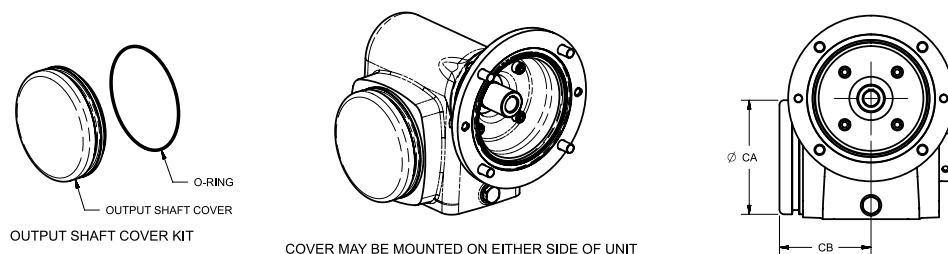


UNIT SIZE	CATALOG NUMBER	CA	CB*	APPROX. WT
7180	XHSS7180-33-KIT	3.49	3.45	.81 LBS
7210	XHSS7210-33-KIT	4.11	3.69	1.10 LBS
7240	XHSS7240-33-KIT	4.61	3.70	1.24 LBS
7260	XHSS7260-33-KIT	5.00	3.90	1.26 LBS
7320	XHSS7320-33-KIT	6.25	4.25	1.85 LBS

Cover Face Wall Thickness = 0.09 Inches. Max shaft projection of customer shaft from centerline should be less than CB dimension minus Wall thickness.

Torque Arm Option

SSHF700T & SSHQC700T Hollow Output Shaft, T Torque Arm

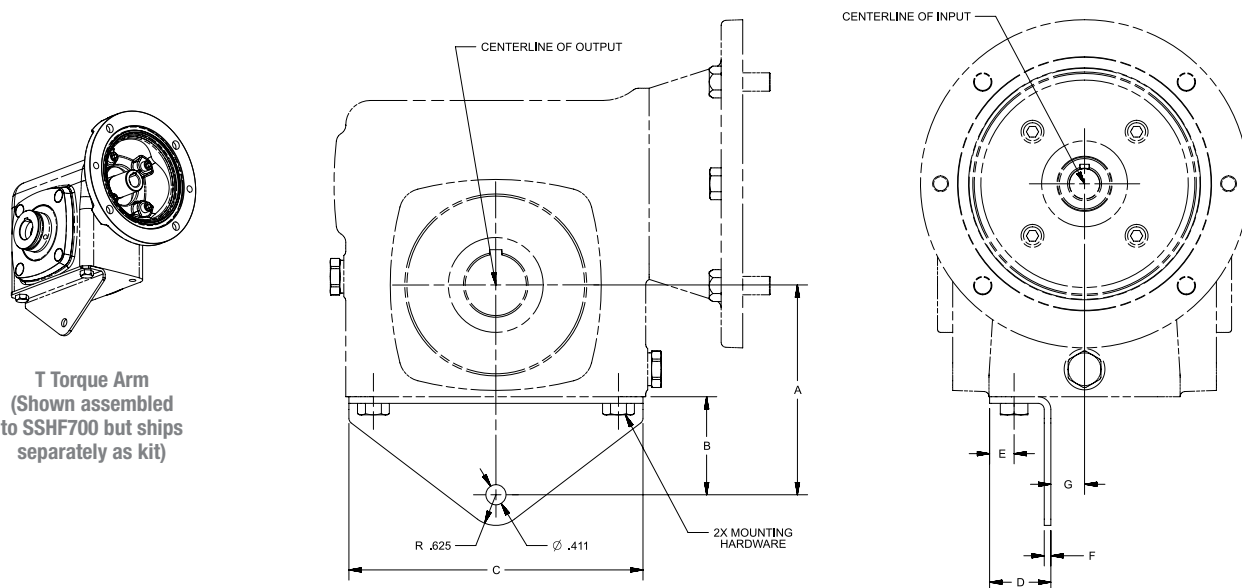


Size	Kit Catalog Number	A	B	C	D	E	F	G	Mounting Hardware (2X) SS HEX Head Cap Screws
713	XHSS718-34-KIT	3.22	1.50	5.06	1.12	0.44	0.135	0.31	5/16-18 X 1/2
715	XHSS718-34-KIT	3.41	1.50	5.06	1.12	0.44	0.135	0.69	5/16-18 X 1/2
7180	XHSS718-34-KIT	3.56	1.50	5.06	1.12	0.44	0.135	0.69	5/16-18 X 1/2
7210	XHSS724-34-KIT	4.28	2.00	6.00	1.25	0.50	0.135	0.69	3/8-16 X 5/8
7240	XHSS724-34-KIT	4.50	2.00	6.00	1.25	0.50	0.135	0.69	3/8-16 X 5/8
7260	XHSS726-34-KIT	5.44	2.50	8.68	1.68	0.59	0.250	0.60	3/8-16 X 3/4
7320	XHSS732-34-KIT	6.00	2.50	8.68	1.68	0.59	0.250	0.91	7/16-14 X 7/8

*Stainless hex head bolt (x2) supplied.


Output Flange Option




SSHF700V & SSHQC700V Hollow Output Shaft, V Position




V Output Flange

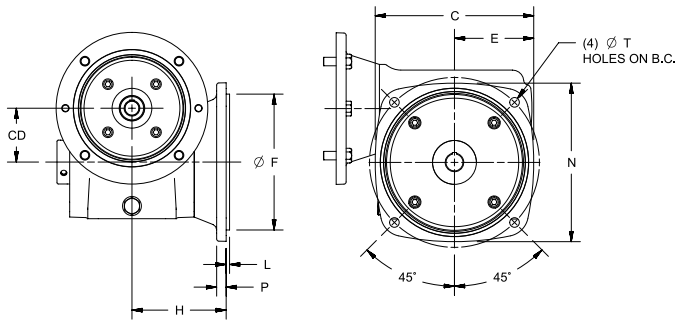

SSHF700W & SSHQC700W Hollow Output Shaft, W Position





W Output Flange

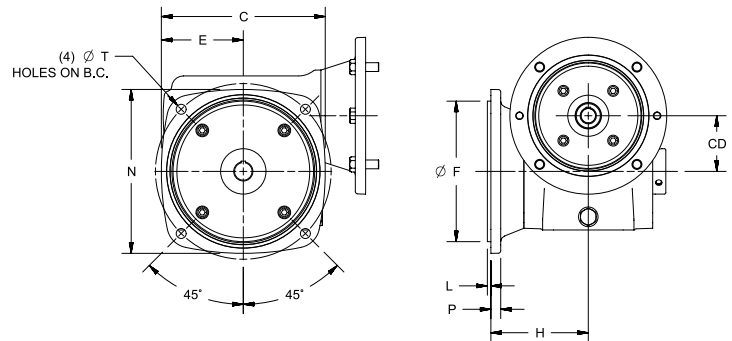

SIZE	C.D.	C	E	F	H	L	N	P	T			APPROXIMATE WEIGHT (LBS.)	
									HOLE DIA	C'BORE DIA	B.C.	SSF700	SSH700
713	1.33	4.75	2.38	4.125	3.18	0.15	5.80	0.68	0.362	Ø 0.60 x 0.48 DP	5.00	17	19
715	1.54	5.54	2.77	4.750	4.08	0.15	6.94	1.05	0.362	Ø 0.60 x 0.48 DP	5.88	26	29
7180	1.75	6.00	3.00	4.750	3.62	0.15	6.00	0.30	0.362	-	5.88	27	26
7210	2.06	6.25	3.12	5.250	3.94	0.15	6.25	0.36	0.425	-	6.50	32	31
7240	2.38	7.00	3.50	5.500	4.16	0.15	7.00	0.42	0.425	-	7.50	40	39
7260	2.62	7.50	3.75	6.500	4.45	0.15	7.50	0.42	0.425	-	8.00	49	56
7320	3.25	9.25	4.62	8.000	5.50	0.15	9.25	0.44	0.535	-	10.00	80	93

Tapped Flange Holes with Supplied V/W Base Option

Size	A	B	C	D	E	
					NO. OF HOLES	THREAD DEPTH
7180	2.720	1.360	-	-	4	0.50
7210	3.062	1.531	-	-	4	0.50
7240	3.500	1.750	-	-	4	0.50
7260	3.920	1.960	-	-	4	0.58
7320	3.688	1.844	5.624	2.812	8	0.65


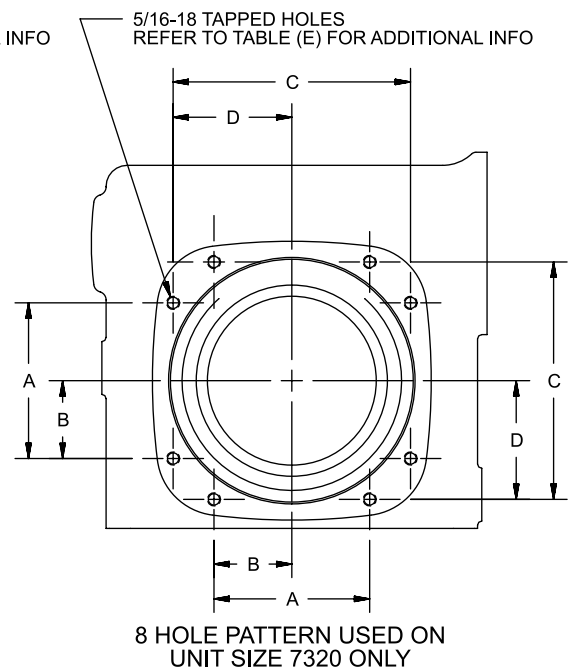
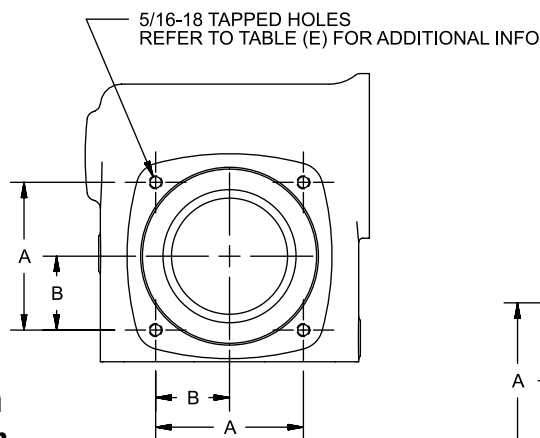


A1 SS700 WB Series Double Reduction, Parallel Shafts




Dimensions



SSHFWB700 & SSHQCWB700 Hollow Output Shaft

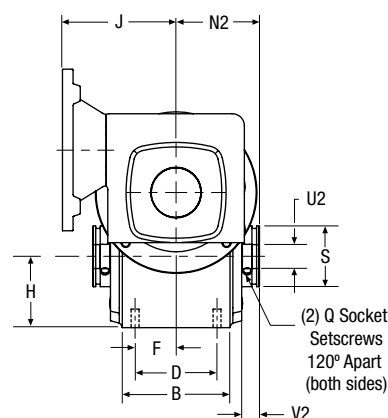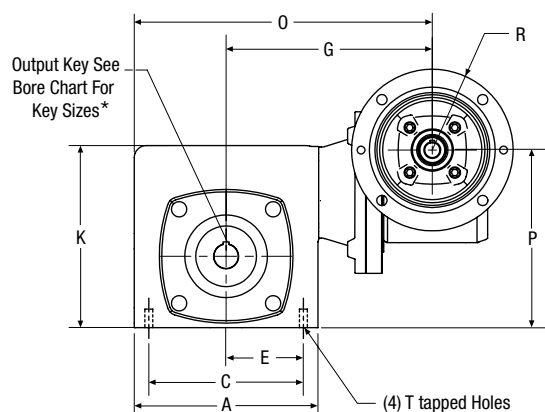

SSFWB700 & SSQCWB700 Solid Output Shaft

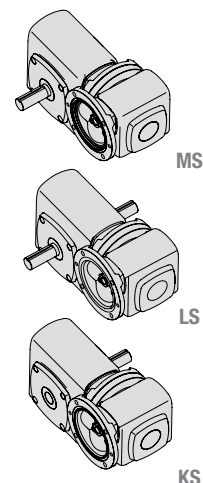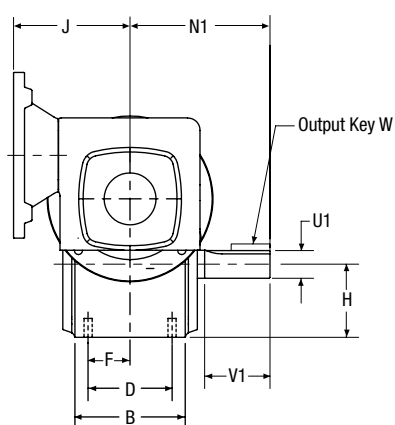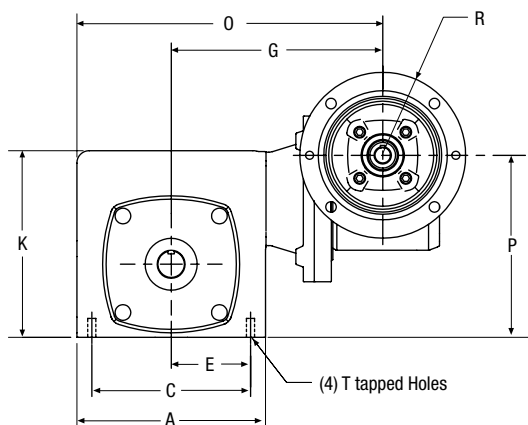

SIZE	A	B	C	D	E	F	G	H	J		K	N1	N2		O	P
									F700	QC700 †			Hollow Style			
									56C/140TC	56C/140TC			P	AP		
713	4.35	2.87	3.25	2.00	1.63	1.00	7.00	1.72	3.94	5.46	4.27	4.00	2.50	–	9.18	4.39
7180	5.25	3.68	4.19	2.75	2.09	1.38	7.85	2.06	3.94	5.46	5.31	4.31	3.03	2.75	10.80	5.15
7210	6.12	3.90	5.00	2.88	2.50	1.44	8.10	2.28	3.94	5.46	6.04	4.69	3.31	3.00	11.40	5.68
7260	7.50	4.45	6.38	3.38	3.19	1.69	8.84	2.94	3.94	5.46	7.41	5.63	3.50	3.12	12.89	6.90
7320	8.80	5.20	7.50	4.00	3.75	2.00	9.56	3.50	4.78	6.46	8.60	7.06	4.00	3.50	14.31	8.50


SIZE	Q	R † 56C/140TC	S	T	Low Speed Shaft							Approx Weight (lbs.)	
				Tap Size	Solid Output Shaft				Hollow Bore Output				
					W - Key				Max U2*	V2			
					U1	V1	Sq.	Length		P	AP		
713	#10-32	3.33	1.38	5/16-18	0.625	2.13	3/16	1	1.0000	0.63	—	33	35
7180	#10-32	3.32	1.73	5/16-18	0.875	1.47	3/16	1	1.2500	0.53	0.25	44	43
7210	1/4-28	3.32	1.94	3/8-16	1.000	1.66	1/4	1-1/4	1.2500	0.62	0.31	48	47
7260	5/16-24	3.32	2.44	3/8-16	1.125	2.41	1/4	1-15/16	2.0000	0.56	0.19	65	63
7320	5/16-24	3.35	2.83	7/16-14	1.375	3.40	5/16	2-7/16	2.2500	0.75	0.25	95	92

* Refer to Table 1 on page 7. † 42CZ Flange Dimensions: (QC713 Only) J= 4.15; R=2.16


Dimensions




SSHFWD700 & SSHQCWD700 Hollow Output Shaft



LS

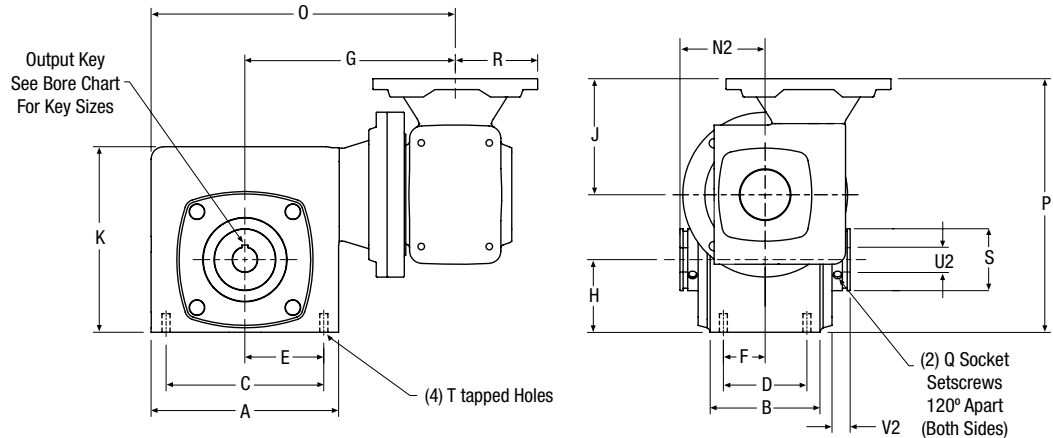


SSFWD700 & SSQCWD700 Solid Output Shaft

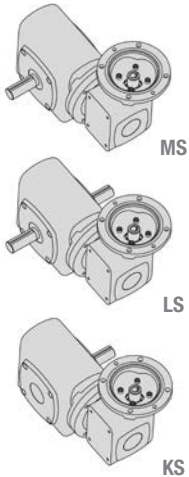

MS

LS

KS

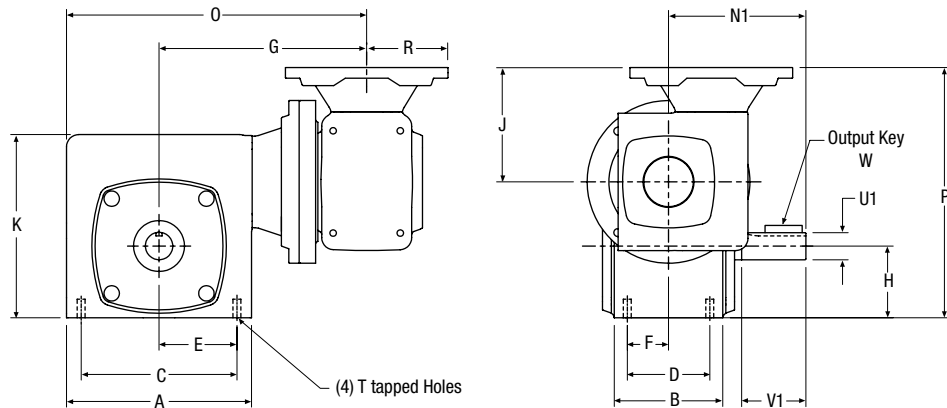



SIZE	A	B	C	D	E	F	G	H	J †		K	N1	N2		O	P †	
									F700	QC700			Hollow Style			F700	QC700
									56C/140TC	56C/140TC			P	AP		56C/140TC	56C/140TC
713	4.35	2.87	3.25	2.00	1.63	1.00	7.00	1.72	3.94	5.46	4.27	4.00	2.50	—	9.18	6.99	8.51
7180	5.25	3.68	4.19	2.75	2.09	1.38	7.85	2.06	3.94	5.46	5.31	4.31	3.03	2.75	10.80	7.75	9.27
7210	6.12	3.90	5.00	2.88	2.50	1.44	8.10	2.28	3.94	5.46	6.04	4.69	3.31	3.00	11.40	8.28	9.80
7260	7.50	4.45	6.38	3.38	3.19	1.69	8.84	2.94	3.94	5.46	7.41	5.63	3.50	3.12	12.89	9.50	11.02
7320	8.80	5.20	7.50	4.00	3.75	2.00	9.56	3.50	4.78	6.46	8.60	7.06	4.00	3.50	14.31	11.45	13.22

SIZE	Q	R † 56C/140TC	S	T	Low Speed Shaft								Approx Weight (lbs.)	
				Tap Size	Solid Output Shaft				Hollow Bore Output					
					U1	V1	W - Key		Max U2*	V2				
							Sq.	Length		P	AP	SSFWD	SSHFW	
713	#10-32	3.33	1.38	5/16-18	0.625	2.13	3/16	1	1.0000	0.63	—	33	35	
7180	#10-32	3.32	1.73	5/16-18	0.875	1.47	3/16	1	1.2500	0.53	0.25	44	43	
7210	1/4-28	3.32	1.94	3/8-16	1.000	1.66	1/4	1-1/4	1.2500	0.62	0.31	48	47	
7260	5/16-24	3.32	2.44	3/8-16	1.125	2.41	1/4	1-15/16	2.0000	0.56	0.19	65	63	
7320	5/16-24	3.35	2.83	7/16-14	1.375	3.40	5/16	2-7/16	2.2500	0.75	0.25	95	92	

* Refer to Table 1 on page 7 † 42CZ Flange Dimensions: (QC713 Only) J= 4.15; R=2.16; P=7.20


SS2000R Series Helical Bevel Gear Drives A2

Optional gasketed shaft cover available to eliminate food traps




Optional keyless **Tapered Bushing** (shown) provides longer shaft life and faster installation


303 Stainless steel shafts



Optional piloted output flange available



Unique **Mounting Registers** allow for quick precision alignment

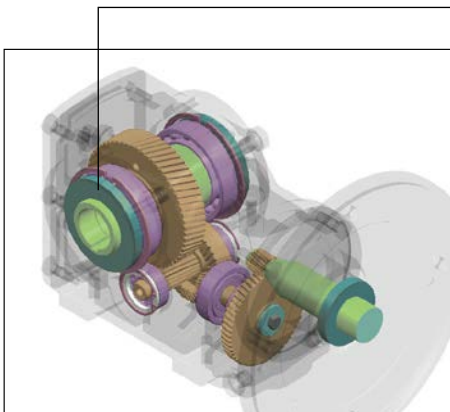

Laser marked nameplate provide worry-free part identification while maintaining a smooth, unetched surface

Rare Earth Magnets near gear mesh provide automatic entrapment of wear debris ensuring longer life

The **Original Domed Crown™** unique rounded housing prevents foreign matter adherence and fluid accumulation

Stainless Steel Exterior
316 Castings
303/304 Machined Components

IP69K

When ordered with high pressure washdown seal option*

H1 food grade Klubersynth UH1 6-460 maximizes torque capacity and efficiency


Larger diameter oil fill/drain holes for faster oil changes

NEMA or IEC C-Face motor input

Polished matte finish maintains clean appearance throughout operation

Integrated O-rings

3-Jaw Coupling



Optional high pressure washdown seal available*

Energy Efficient Design

With efficiency of 98% per gear mesh, Series 2000 helical bevel reducers are ideal for use in applications with:

- continuous or high duty cycle operations
- high-ratio reduction
- limited access applications where long life is a necessity

Ordering Information

Example: SSRF2043RF-40KC-B7-GS5-P22-Z-HUTFSS-9

SS	RF	2043R	F - 40	K	C	- B7 -	GS	5	- P22	Z -	HUTFSS - 9
Exterior SS Stainless Steel	Style RF - C-Face Coupling Mount	Size 2033R 2043R 2063R 2073R	Base Blank - None F - Output Flange T - Torque Arm B - Base Mounting Feet	Lubrication K - Klubersynth UH1-6-460 H1 Food Grade	Seal Option Blank - Standard C - High Pressure Washdown Output Seals IP69K	Motor Input Mounting Nema Mounting B5 56C B7 140TC/180C B9 180TC/210C B11 210TC/250UC IEC (B5) Mounting M14F IEC71 M19F IEC80 M24F IEC90S/90L M28F IEC100/112 M38F IEC132S/132M	Mounting Positions See page 18 1 2 3 4 5 6	Output Shaft Code Hollow Shaft See Chart 1 P24 Inch - spec'd in 1/16" increments PM40 Metric - spec'd in mm increments Solid Shaft See Chart 1 D24 OD - spec'd in 1/16" increments DM40 OD - spec'd in mm increments Tapered Bushing Hollow Output Shaft See Chart 1 TP22 Inch - Bore - spec'd in 1/16" increments TM35 Metric - Bore - spec'd in mm increments	C-Face Motor See Chart 2 Blank - No Motor	Motor Conduit Box Location See Chart 3 Blank - No Motor 0 - 12 o'clock 3 - 3 o'clock 6 - 6 o'clock 9 - 9 o'clock	
Reductions Blank - 3-Reductions WP - 4-Reduction Includes Planetary 5:1 Reduction		Ratios See page 19 for list of ratios. X.X - For ratios lower than 10:1 XXX - For ratios higher than 10.1					Output Mounting GS - Customer Mount on Left (Stainless) HS - Customer Mount Either Side (Stainless) JS - Customer Mount on Right Side (Stainless)			Shaft Cover Blank - No Cover Z - Shallow Cover (Fits Solid & Hollow Shafts) Y - Tapered Bushing Cover X - Deep Cover	

Chart 1: Available Output Shaft Codes

Size	Hollow Shaft Bore Codes		Solid Shaft OD Codes		Tapered Bushing Bore Codes	
	Inch	Metric	Inch	Metric	Inch	Metric
2033R	P16	PM25	D16	DM25	TP16	TM25
	P20	PM30	D20	DM30		
2043R	P20	PM30	D20	DM30	TP19	TM30
	P22	PM35	D22	DM35	TP20	
2063R	P23	PM40	D26	DM40	TP22	TM35
	P24		D32	DM50	TP23	
2073R	P31	PM50	D32	DM45	TP28	TM40
	P32		D34	DM50		

Additional Shaft and Bore sizes available upon request.

Chart 2: Stainless Steel AC Motors


Part #	HP	Type	Frame Size
EUT-SS	0.33	TENV	56C
FUT-SS	0.5	TENV	56C
NEW FYTF-SS	0.5	TEFC	56C
NEW FYTF-SS	0.5	TEFC	56C
GUT-SS	0.75	TENV	56C
HUT5/8-SS	1.0	TENV	56C
HUTF5/8-SS	1.0	TEFC	56C
NEW HYTF5/8-SS	1.0	TEFC	56C
HUT-SS	1.0	TENV	140TC
HUTF-SS	1.0	TEFC	140TC
JUTF-SS	1.5	TEFC	140TC
KUTF-SS	2.0	TEFC	140TC
LUTF-SS	3.0	TEFC	180TC
MUTF-SS	5.0	TEFC	180TC
NUTF-SS	7.5	TEFC	210TC
PUTF-SS	10.0	TEFC	210TC

All above motors are 230/460V except FYTF-SS and HYTF5/8-SS which are 575V

TENV = Totally enclosed, non-ventilated

TEFC = Totally enclosed, fan-cooled

Chart 3: Conduit Box Positions


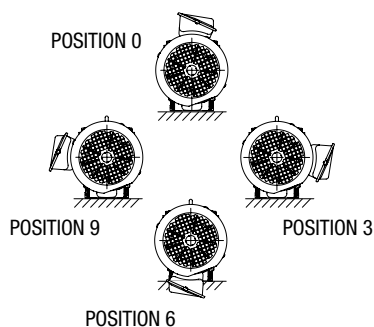


When looking into motor fan cover with gear drive in mounting position 1.

Motor Installation Mounting Positions & Lubrication

Coupling Location for Motor Installation

Motor Frame	"X"
B5	56TC
B7	140TC
B9	180TC
B11	210TC
B13	250TC

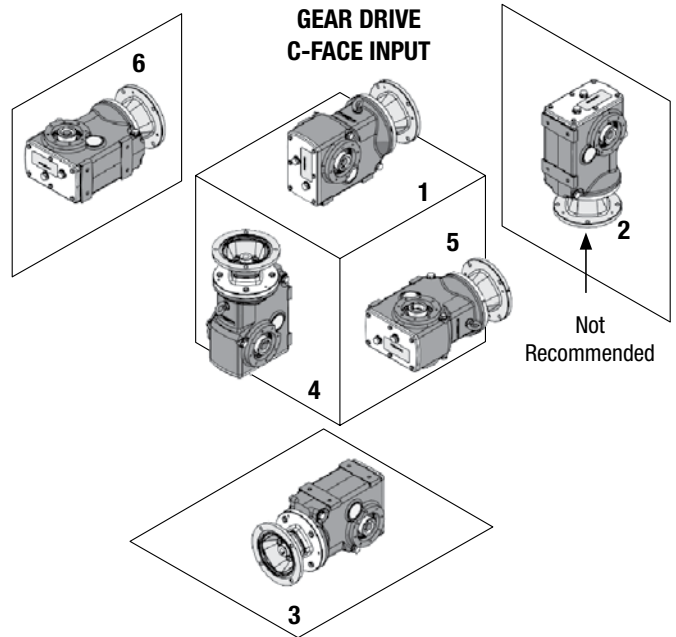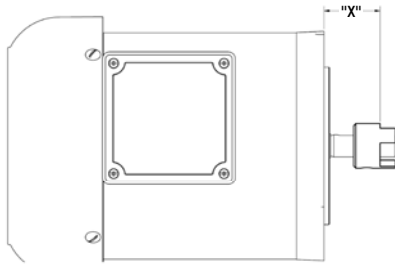

Lubrication

Klubersynth UH1 6-460 is recommended for the SS2000R Series gear drives for optimum performance. Normal full-load operating temperatures range between 130°F - 150°F. During initial break-in of the gear drive, higher than normal operating temperatures may result. All gear drives are supplied with UH1 6-460 synthetic oil (unless specified otherwise) with quantity listed below for standard mounting position 1 or to mounting specified at time of order. These gear drives are designed with internal features to

reduce the impact of metallic wear debris, which should increase maintenance intervals. Relubrication is recommended for 10,000 hours or more frequently when operating in highly contaminated environments. Satisfactory performance may be obtained in some applications with non-synthetic oils, but will require more frequent oil changes. Recommendations are based on input speeds of 1800 RPM nominal. For higher input speeds, consult factory.

RECOMMENDED LUBRICANT	Reducer Designation	ISO Viscosity Grade No.	Viscosity Range SUS @ 100F	Part Number (Quart)	Comments
Klubersynth UH1 6-460 Synthetic	K	460	1950/2500	65159	H1 Food-Grade

Ambient temperature range of -20°F to +125°F is suitable for standard configured products and ratings. Contact technical support for operating conditions beyond this range. Notes: Upper temperature limit is dictated by reducer components and not the oil.

	Mounting Position					
	1	2	3	4	5	6
Plug A	Oil-Fill	Opt. Vent	—	Oil Drain	Oil-Fill	—
Plug B	—	Opt. Vent	Oil-Fill	Oil Drain	—	Oil-Fill
Plug C	Opt. Vent	Oil-Fill	Oil Drain	—	Oil Drain	Opt. Vent
Plug D	Oil Drain	Oil Drain	Opt. Vent	Oil-Fill	Oil Drain	Opt. Vent
Plug E	Oil Drain	Oil Drain	Opt. Vent	Oil-Fill	Opt. Vent	Oil Drain
Plug F	Opt. Vent	Oil-Fill	Oil Drain	—	Opt. Vent	Oil Drain


Notes:

- Oil-Fill** Plugged from factory. Port used during regular maintenance intervals for Oil-Fill. Defines approximate oil-level during operation.
 - Opt. Vent** Plugged from factory. A 5psi pressure vent plug is supplied uninstalled with each product. Defines optional location for installation of that pressure vent.
 - Oil Drain** Plugged from factory. Port used during regular maintenance intervals for draining used oil. Re-plug prior to oil-fill.
 - Position 2*** Not preferred and not recommended as a Mounting Position
 - Position 4*** Venting not required.
- All products supplied from factory lubed for Position 1 unless specified otherwise

Lube Capacity in Quarts

	Mounting Position					
	1	2	3	4	5	6
2033R	0.43	0.95	1.40	1.58	1.25	1.38
2043R	0.70	1.77	2.23	2.47	2.00	2.00
2063R	1.25	2.32	3.30	4.08	2.82	3.02
2073R	1.60	3.58	5.46	6.27	4.86	5.16

Oil Plug and Vent Plug Location Details

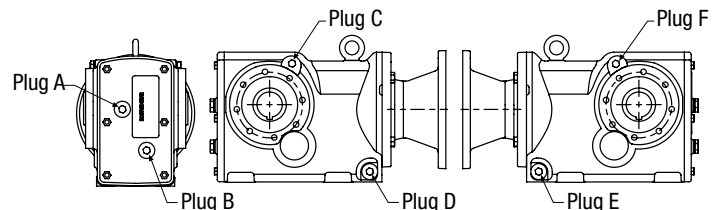

A2 SS2000R Series Helical Bevel Gear Drives

Ratios and Performance

3 Reductions

■ Available Options ○ Optional

Model No.	Output Speed (1750 rpm Input)	Actual Ratio	Ratio used in Part No.	Input Power (HP)	Output Torque Rating (lbf-in)	NEMA C-Face Input				IEC C-Face Input				
						B5	B7	B9	B11	M14F	M19F	M24F	M28F	M38F
SSRF2033R	326	5.36	5.4	7.29	1,320	○	○	■		○	○	○	■	
	273	6.42	6.4	6.47	1,400	■	■	○		■	■	■	○	
	259	6.76	6.8	6.22	1,420	■	■	○		■	■	■	○	
	220	7.96	8.0	5.42	1,460	■	■	○		■	■	■	○	
	196	8.91	8.9	5.01	1,510	■	■	○		■	■	■	○	
	164	10.67	11	4.21	1,520	■	■	○		■	■	■	○	
	144	12.14	12	3.60	1,480	■	■	○		■	■	■	○	
	134	13.02	13	3.47	1,530	■	■	○		■	■	■	○	
	114	15.32	15	3.23	1,670	■	■	○		■	■	■	○	
	102	17.15	17	2.93	1,700	■	■			■	■	■		
	85	20.54	21	2.63	1,830	■	■			■	■	■		
	75	23.36	23	2.32	1,830	■	■			■	■	■		
	70	24.99	25	2.17	1,840	■	■			■	■	■		
	61	28.83	29	1.89	1,850	■	■			■	■	■		
	58	29.96	30	1.82	1,850	■	■			■	■	■		
	49	35.85	36	1.53	1,860	■	■			■	■	■		
	46	37.79	38	1.46	1,870	■	■			■	■	■		
	39	44.46	44	1.24	1,880	■	■			■	■	■		
	35	49.79	50	1.11	1,880	■	■			■	■	■		
SSRF2043R	29	59.61	60	0.93	1,890	■				■	■			
	26	67.80	68	0.82	1,900	■				■	■			
	24	72.54	73	0.77	1,900	■				■	■			
	21	83.69	84	0.67	1,910	■				■				
	18	97.81	98	0.58	1,920	■				■				
	16	106.38	106	0.53	1,920	■				■				
	311	5.62	5.6	12.1	2,310		○	■	■			○	■	■
	266	6.58	6.6	11.2	2,490		○	■	■			○	■	■
	238	7.36	7.4	10.4	2,590		○	■	■			○	■	■
	203	8.63	8.6*	8.10	2,370		○	■	■			○	■	■
	193	9.06	9.1*	7.91	2,430		○	■	■			○	■	■
	166	10.56	11*	7.09	2,530		○	■				○	■	
	149	11.77	11.8*	6.60	2,620		○	■				○	■	
	144	12.19	12	8.40	3,460		○	■				○	■	
	128	13.65	14	7.50	3,480		○	■				○	■	
	109	15.99	16*	6.46	3,500	■	■	■		○	○	■	■	
	104	16.80	17*	6.16	3,510	■	■	■		○	○	■	■	
	89	19.58	20	5.32	3,530	■	■	■		○	○	■	■	
	80	21.81	22	4.80	3,550	■	■	■		○	○	■	■	
	72	24.42	24	4.30	3,560	■	■	■		○	○	■	■	
	68	25.91	26	4.06	3,570	■	■	■		○	○	■	■	
	60	29.30	29	3.61	3,590	■	■	■		○	○	■	■	
	58	30.23	30	3.50	3,590	■	■	■		○	○	■	■	
	49	35.39	35	3.01	3,610	■	■	■		○	○	■	■	
	44	39.61	40	2.70	3,630	■	■			■	■	■		
	38	46.41	46	2.31	3,650	■	■			■	■	■		
	36	48.75	49	2.20	3,650	■	■			■	■	■		
	31	56.83	57	1.90	3,670	■	■			■	■	■		
	28	63.30	63	1.71	3,680	■	■			■	■	■		
	25	70.89	71	1.53	3,690	■	■			■	■	■		
	23	75.20	75	1.50	3,700	■	■			■	■	■		
	21	85.12	85	1.28	3,710	■	■			■	■	■		
	19	90.86	91	1.20	3,720	■	■			■	■	■		
	17	104.37	104	1.05	3,740	■	■			■	■	■		
	14	121.48	121	0.91	3,750	■				■	■			
	13	131.87	132	0.84	3,760	■				■	■			

Ratings shown reflect maximum gear capacity based on AGMA Standards (Service Factor = 1.0) with Klybersynth UH1 6-460.

For input speeds above 1750 RPM, do not exceed maximum listed input horsepower.

* Depending on the input option chosen, reducer ratios denoted with * may have an overall capacity lower than the values shown (values represent gear capacity). Contact factory for details.

Ratios and Performance

3 Reductions

■ Available Options ○ Optional

Model No.	Output Speed (1750 rpm Input)	Actual Ratio	Ratio used in Part No.	Input Power (HP)	Output Torque Rating (lbf-in)	NEMA C-Face Input				IEC C-Face Input				
						B5	B7	B9	B11	M14F	M19F	M24F	M28F	M38F
SSRF2063R	240	7.28	7.3	17.6	4,330		○	■	■			○	■	■
	209	8.37	8.4	15.5	4,400		○	■	■			○	■	■
	181	9.66	9.7	13.5	4,440		○	■	■			○	■	■
	165	10.63	11*	12.4	4,460		○	■	■			○	■	■
	141	12.41	12*	10.7	4,490		○	■	■			○	■	■
	132	13.22	13	15.5	6,930		○	■	■			○	■	■
	115	15.19	15	14.0	7,230		○	■	■			○	■	■
	100	17.53	18	12.9	7,680		○	■	■			○	■	■
	91	19.29	19*	12.0	7,830		○	■	■			○	■	■
	78	22.53	23*	10.5	8,050		○	■	■			○	■	■
	74	23.60	24*	10.2	8,170		○	■	■			○	■	■
	64	27.27	27*	9.10	8,410		■	■	■			■	■	■
	58	30.21	30*	7.72	7,910		■	■	■			■	■	■
	49	35.61	36	5.30	6,340	○	■	■		○	○	■	■	
	46	38.39	38	5.79	7,550	○	■	■		○	○	■	■	
	39	44.32	44	5.04	7,580	○	■	■		○	○	■	■	
	36	48.77	49	4.59	7,600	■	■	■		■	■	■	■	
	31	56.97	57	3.95	7,630	■	■	■		■	■	■	■	
	29	59.67	60	3.78	7,650	■	■	■		■	■	■	■	
	25	68.95	69	3.28	7,670	■	■	■		■	■	■	■	
	23	76.37	76	2.97	7,700	■	■			■	■	■		
	19	90.04	90	2.53	7,720	■	■			■	■	■		
	17	101.43	101	2.25	7,750	■	■			■	■	■		
	16	108.03	108	2.11	7,750	■	■			■	■	■		
	14	123.54	124	1.85	7,770	■	■			■	■	■		
	12	143.20	143	1.60	7,800	■	■			■	■	■		
SSRF2073R	242	7.24	7.2	31	7500			○	■				○	■
	206	8.48	8.5*	29	8300			○	■				○	■
	183	9.56	9.6*	27	8730			○	■				○	■
	161	10.84	11	25	9010			○	■				○	■
	142	12.35	12	22	9010			○	■				○	■
	129	13.52	14	27	12300			○	■				○	■
	110	15.84	16	25	13500			○	■				○	■
	98	17.86	18	22	13600			○	■				○	■
	86	20.24	20	19.9	13700			○	■				○	■
	76	23.08	23	17.6	13700			○	■				○	■
	69	25.2	25*	16.2	13800		○	■	■			○	■	■
	60	29.12	29*	13.5	13300		○	■	■			○	■	■
	58	30.4	30*	13	13400		○	■	■			○	■	■
	50	34.84	35*	11.4	13500		○	■	■			○	■	■
	46	38.39	38*	10.8	14000		○	■	■			○	■	■
	44	40.04	40	10.4	14000		○	■	■			○	■	■
	39	45.16	45	9.2	14100		○	■	■			○	■	■
	34	51.18	51	8.2	14200		○	■	■			○	■	■
	30	58.34	58	7.2	14200		○	■				○	■	
	27	63.71	64*	6.6	14300	■	■	■		■	■	■	■	
	24	73.62	74	5.7	14300	■	■	■		■	■	■	■	
	23	76.87	77	5.5	14400	■	■	■		■	■	■	■	
	20	88.08	88	4.8	14400	■	■	■		■	■	■	■	
	18	97.05	97	4.4	14500	■	■	■		■	■	■	■	
	15	113.56	114	3.8	14500	■	■	■		■	■	■	■	
	14	127.32	127	3.4	14600	■	■	■		■	■	■	■	
	13	135.28	135	3.2	14600	■	■	■		■	■	■	■	
	11	154.02	154	2.8	14400	■	■			■	■	■		
	10	177.76	178	2.4	14600	■	■			■	■	■		
	9	192.18	192	2.3	14700	■	■			■	■	■		

Ratings shown reflect maximum gear capacity based on AGMA Standards (Service Factor = 1.0) with Klybersynth UH1 6-460.


For input speeds above 1750 RPM, do not exceed maximum listed input horsepower.

* Depending on the input option chosen, reducer ratios denoted with * may have an overall capacity lower than the values shown (values represent gear capacity). Contact factory for details.

A2 SS2000R Series Helical Bevel Gear Drives

Mounting Details

(Shown with Hollow Output Shaft Option)

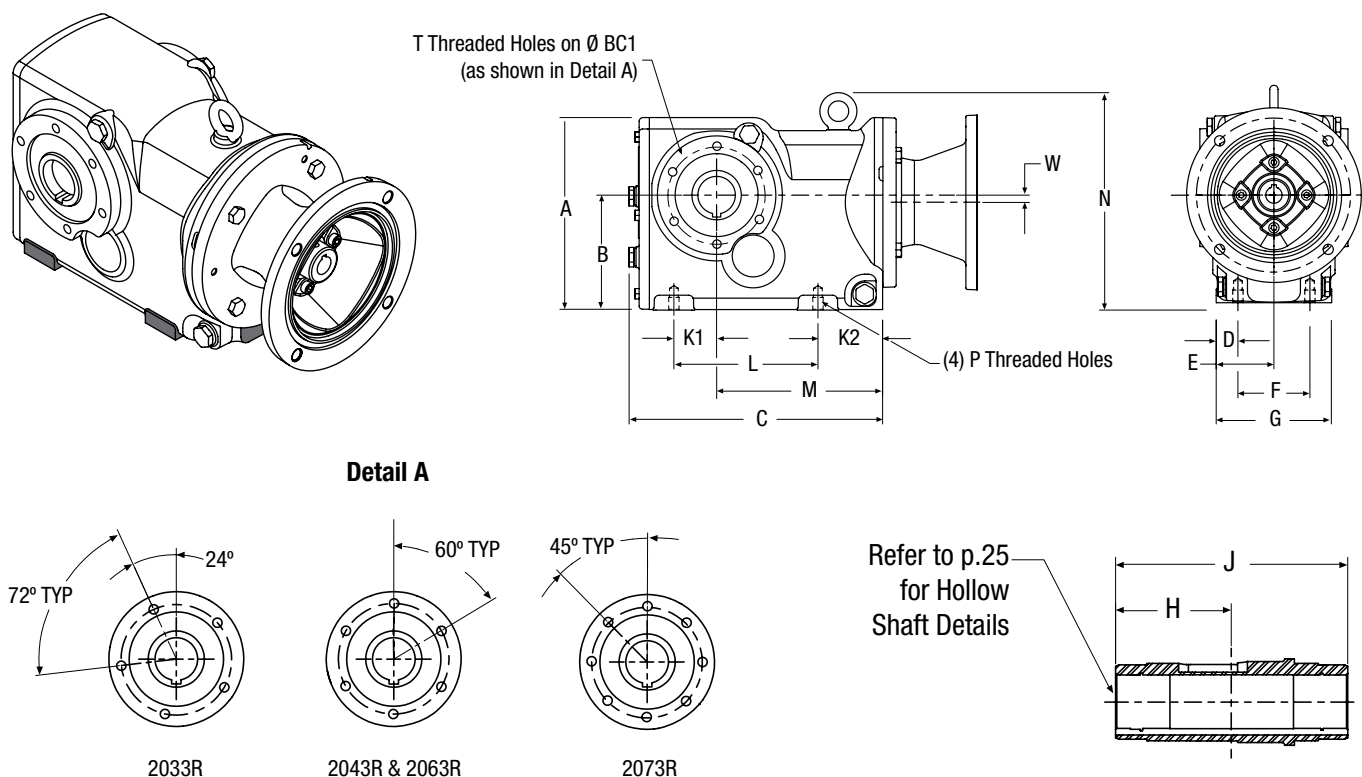

Solid output shaft details shown on p. 23
Tapered bushing output shaft details shown on p. 24


Dimensions in inches (mm)

CATALOG NO.	A	B +/- 0.005 (+/- 0.13)	C	D	E +/- 0.010 (+/- 0.25)	F	L	G	H	J
SSRF2033R	6.4 (163)	3.923 (99.64)	8.7 (221)	0.83 (21.1)	2.010 (51.05)	2.360 (59.94)	4.610 (117.09)	4.01 (101.9)	2.55 (64.8)	5.09 (129.3)
SSRF2043R	7.4 (188)	4.400 (111.76)	9.7 (246)	0.83 (21.1)	2.210 (56.13)	2.756 (70.00)	5.512 (140.00)	4.42 (112.3)	3.03 (77.0)	6.06 (153.9)
SSRF2063R	8.9 (226)	5.510 (139.95)	11.4 (290)	0.90 (22.9)	2.630 (66.80)	3.460 (87.88)	5.984 (151.99)	5.25 (133.3)	3.50 (88.9)	7.00 (177.8)
SSRF2073R	11.3 (287)	7.081 (179.86)	12.9 (328)	1.06 (26.9)	3.070 (77.98)	4.020 (102.11)	6.69 (169.93)	6.14 (156.0)	4.13 (104.9)	8.27 (210.1)

CATALOG NO.	K1	K2	M +/- 0.005 (+/- 0.13)	N	P		T		BC1	W	Approx. Weight (LBS)
					Dia. (mm)	Depth	Dia. (mm)	Depth			
SSRF2033R	1.38 (35.1)	2.34 (59.5)	5.574 (141.58)	7.1 (180)	M10x1.5	0.65 (16.5)	M8x1.25	0.58 (14.8)	3.70 (94.0)	0.33 (8.4)	32
SSRF2043R	1.57 (39.9)	2.41 (61.3)	6.354 (161.39)	8.3 (211)	M10x1.5	0.65 (16.5)	M10x1.5	0.52 (13.3)	3.85 (97.8)	0.28 (7.1)	58
SSRF2063R	1.65 (41.9)	3.01 (76.6)	7.348 (186.64)	8.9 (226)	M12x1.75	0.78 (19.8)	M12x1.75	0.78 (19.8)	4.60 (116.8)	0.80 (20.3)	80
SSRF2073R	1.89 (48.0)	3.63 (92.1)	8.425 (214.00)	11.4 (290)	M16x2.0	1.00 (26.0)	M12x1.75	0.78 (19.8)	5.59 (142.0)	1.23 (31.2)	138

Motor Flange and Coupling Details

(Shown with Hollow Output Shaft Option)

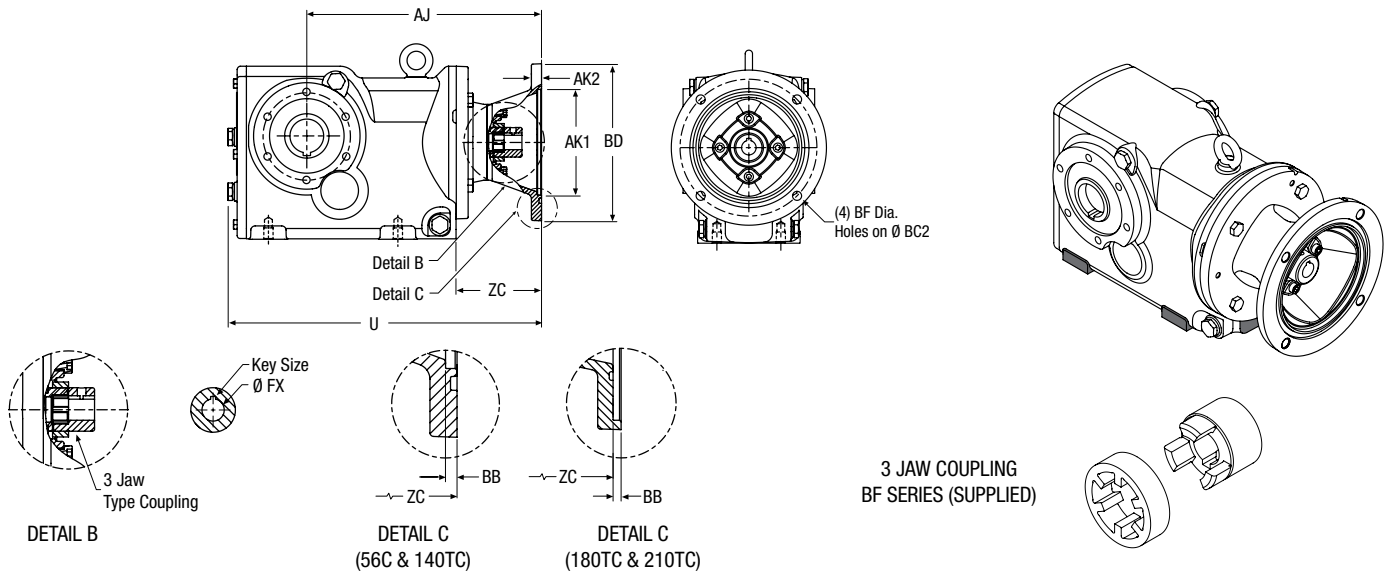

NEMA Sizes - Dimensions in inches (mm)


CATALOG NO.	INPUT SIZE	U	AJ	AK1	AK2	BB	BD	BF	BC2	ZC	FX	KEY SIZE	
												SQ.	LENGTH
SSRF2033R	B5 (56C)	12.3 (312)	9.1 (231)	4.500 (114.3)	0.43 (10.9)	0.18 (4.60)	6.69 (169.9)	0.39 (9.9)	5.88 (149.4)	3.53 (89.7)	0.625 (15.88)	3/16	1-3/8
	B7 (140TC)	13.2 (335)	10 (254)	4.500 (114.3)	0.47 (11.9)	0.18 (4.60)	6.69 (169.9)	0.39 (9.9)	5.88 (149.4)	4.460 (113.3)	0.875 (22.22)	3/16	1-3/8
	B9 (180TC)	15.7 (399)	12.4 (315)	8.500 (215.9)	0.59 (15.0)	0.20 (5.10)	8.98 (228.1)	0.53 (13.5)	7.25 (184.1)	6.000 (152.4)	1.125 (28.57)	1/4	1-3/4
SSRF2043R	B5 (56C)	13.3 (338)	10.0 (254)	4.500 (114.3)	0.43 (10.9)	0.18 (4.60)	6.69 (169.9)	0.39 (9.9)	5.88 (149.4)	3.62 (91.9)	0.625 (15.88)	3/16	1-3/8
	B7 (140TC)	14.3 (363)	10.9 (277)	4.500 (114.3)	0.47 (11.9)	0.18 (4.60)	6.69 (169.9)	0.39 (9.9)	5.88 (149.4)	4.540 (115.3)	0.875 (22.22)	3/16	1-3/8
	B9 (180TC)	15.7 (399)	12.4 (315)	8.500 (215.9)	0.59 (15.0)	0.20 (5.10)	8.98 (228.1)	0.53 (13.5)	7.25 (184.1)	6.000 (152.4)	1.125 (28.57)	1/4	1-3/4
	B11 (210TC)	17.8 (452)	14.4 (366)	8.500 (215.9)	0.59 (15.0)	0.20 (5.10)	8.98 (228.1)	0.53 (13.5)	7.25 (184.1)	8.080 (205.2)	1.375 (34.92)	5/16	2-3/8
SSRF2063R	B5 (56C)	14.5 (368)	10.5 (267)	4.500 (114.3)	0.43 (10.9)	0.18 (4.60)	6.69 (169.9)	0.39 (9.9)	5.88 (149.4)	3.14 (79.8)	0.625 (15.88)	3/16	1-3/8
	B7 (140TC)	15.5 (394)	11.4 (290)	4.500 (114.3)	0.47 (11.9)	0.18 (4.60)	6.69 (169.9)	0.39 (9.9)	5.88 (149.4)	4.060 (103.1)	0.625 (15.88)	3/16	1-3/8
	B9 (180TC)	17.0 (432)	12.9 (328)	8.500 (215.9)	0.59 (15.0)	0.20 (5.10)	8.98 (228.1)	0.53 (13.5)	7.25 (184.1)	5.520 (140.2)	1.125 (28.57)	1/4	1-3/4
	B11 (210TC)	19.0 (483)	15.0 (381)	8.500 (215.9)	0.59 (15.0)	0.20 (5.10)	8.98 (228.1)	0.53 (13.5)	7.25 (184.1)	7.600 (193.0)	1.375 (34.92)	5/16	2-3/8
SSRF2073R	B5 (56C)	15.8 (401)	11.3 (287)	4.500 (114.3)	0.43 (10.9)	0.18 (4.60)	6.69 (169.9)	0.39 (9.9)	5.88 (149.4)	2.84 (72.1)	0.625 (15.88)	3/16	1-3/8
	B7 (140TC)	16.7 (424)	12.2 (310)	4.500 (114.3)	0.47 (11.9)	0.18 (4.60)	6.69 (169.9)	0.39 (9.9)	5.88 (149.4)	3.76 (95.5)	0.625 (15.88)	3/16	1-3/8
	B9 (180TC)	18.1 (460)	13.6 (345)	8.500 (215.9)	0.59 (15)	0.2 (5.10)	8.98 (228.1)	0.53 (13.5)	7.25 (184.1)	5.220 (132.6)	1.125 (28.57)	1/4	1-3/4
	B11 (210TC)	20.2 (513)	15.7 (399)	8.500 (215.9)	0.59 (15)	0.2 (5.10)	8.98 (228.1)	0.53 (13.5)	7.25 (184.1)	7.300 (185.4)	1.375 (34.92)	5/16	2-3/8

IEC Sizes - Dimensions in mm

CATALOG NO.	PART NO. IDENTIFIER	FRAME SIZE	U	AJ	AK1	AK2	BB	BD	BF	BC2	ZC	FX	KEY SIZE	
													SQ.	LENGTH
SSRF2033R	M14F	71	299.00	219.00	110	10.92	4.64	160	11.00	130	77.09	14	5x5	20
	M19F	80	328.00	248.00	130	11.94	4.64	200	13.50	165	106.63	19	6x6	25
SSRF2043R	M14F	71	326.00	241.00	110	10.92	4.64	160	11.00	130	79.22	14	5x5	20
	M19F	80	355.00	270.00	130	11.94	4.64	200	13.50	165	108.66	19	6x6	25
	M24F	90S/90L	387.00	302.00	130	15.00	5.15	200	13.50	165	140.23	24	8x7	32
	M28F	100L/112M	432.00	347.00	180	16.51	5.15	250	15.50	215	185.67	28	8x7	40
SSRF2063R	M14F	71	356.00	254.00	110	10.92	4.64	160	11.00	130	67.13	14	5x5	20
	M19F	80	386.00	283.00	130	11.94	4.64	200	13.50	165	96.67	19	6x6	25
	M24F	90S/90L	417.00	315.00	130	15.00	5.15	200	13.50	165	128.14	24	8x7	32
	M28F	100L/112M	463.00	360.00	180	16.51	5.15	250	15.50	215	173.58	28	8x7	40
SSRF2073R	M14F	71	387.32	273.40	110	10.92	4.64	160	11.00	130	59.41	14	5x5	20
	M19F	80	416.86	302.94	130	11.94	4.64	200	13.50	165	88.95	19	6x6	25
	M24F	90S/90L	448.34	334.41	130	15.00	5.15	200	13.50	165	120.42	24	8x7	32
	M28F	100L/112M	493.78	379.85	180	16.51	5.15	250	15.50	215	165.86	28	8x7	40

A2 SS2000R Series Helical Bevel Gear Drives

Output Options – Projecting Solid Output Shaft Details

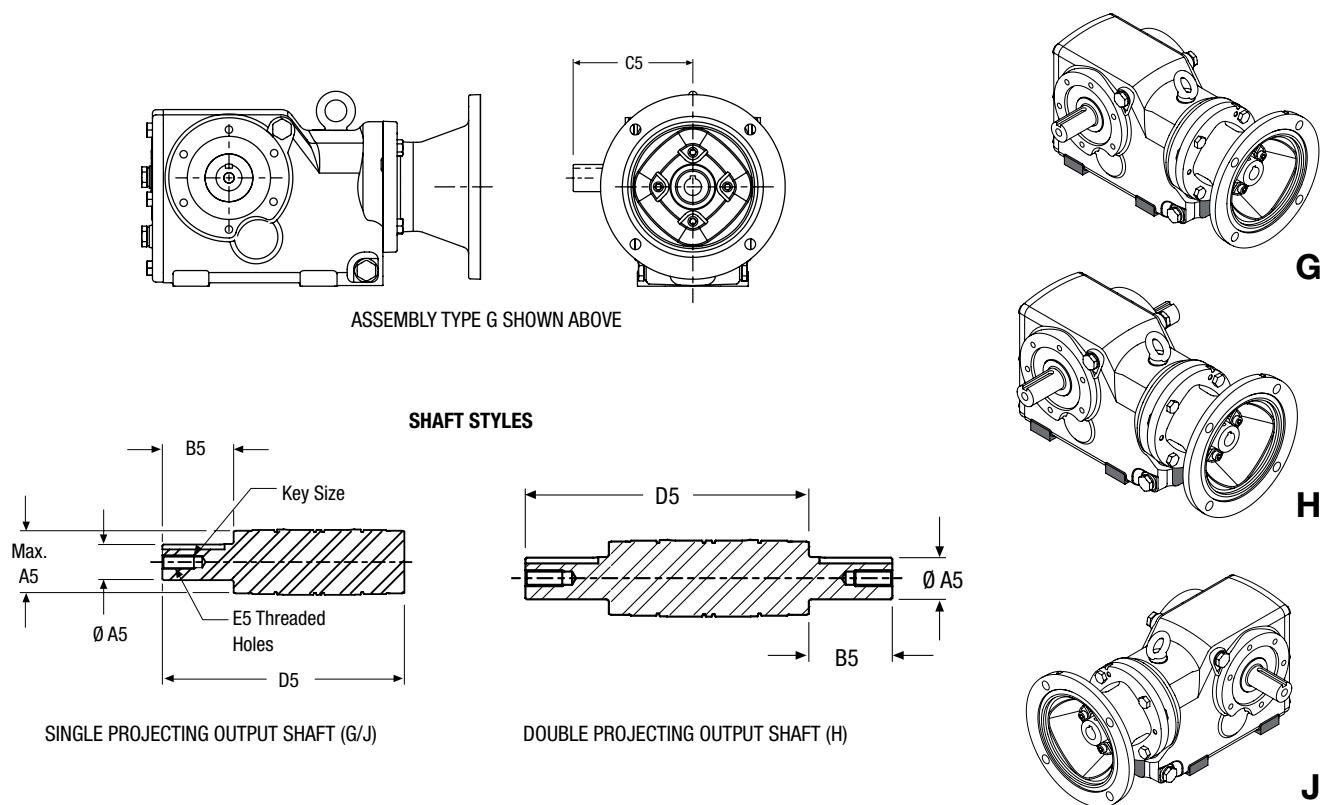

Dimensions in inches


SIZE	PART NO. IDENTIFIER	A5	A5 Tolerance	Max. A5	B5	C5	D5	E5		KEY SIZE	
								Thread	Depth	SQ.	Length
2033R	D16	1.000	+0.0000 -0.0005	1.732	1.97	4.33	6.69	3/8-16	0.87	1/4	1-5/16
	D20	1.250		1.732	2.36	4.72	7.08	1/2-13	0.87	1/4	1-11/16
2043R	D20	1.250		1.890	2.36	5.33	8.26	1/2-13	1.12	1/4	1-11/16
	D22	1.375		1.890	2.76	5.73	8.66	1/2-13	1.12	5/16	1-13/16
2063R	D22	1.375	+0.0000 -0.0010	2.126	2.76	6.34	9.76	1/2-13	1.12	5/16	1-13/16
	D26	1.625		2.126	3.15	6.73	10.15	5/8-11	1.38	3/8	2-1/4
	D32	2.000		2.126	3.94	7.52	10.94	3/4-10	1.61	1/2	2-5/8
2073R	D28	1.750	+0.0000 -0.0010	2.717	3.54	7.72	11.81	5/8-11	0.94	3/8	2-1/4
	D32	2.000		2.717	3.94	8.12	12.21	3/4-10	1.61	1/2	2-5/8
	D34	2.125		2.717	3.94	8.12	12.21	3/4-10	1.61	1/2	2-5/8

Dimensions in mm

SIZE	PART NO. IDENTIFIER	A5	A5 Tolerance	Max. A5	B5	C5	D5	E5		KEY SIZE	
								Thread	Depth	Rect.	Length
2033R	DM25	25.0	-0.015 -0.002	44	50	110.0	169.9	M10	22.0	8X7	40
	DM30	30.0		44	60	120.0	179.9	M10	22.0	8X7	50
2043R	DM30	30.0	-0.018 -0.002	48	60	135.3	209.9	M10	22.0	8 X 7	50
	DM35	35.0		48	70	145.3	219.9	M12	28.0	10 X 8	56
2063R	DM35	35.0		54	70	161.0	247.8	M12	28.0	10 X 8	56
	DM40	40.0		54	80	171.0	257.8	M16	36.0	12 X 8	70
	DM50	50.0		54	100	191.0	277.8	M16	36.0	14 X 9	80
2073R	DM45	45.0	+0.018	69	90	196.1	310.0	M16	36.0	14x9	80
	DM50	50.0	+0.002	69	100	206.1	300.0	M16	36.0	14x9	80

Output shaft key is provided with gear drive. Customer's driven shaft requires standard width and depth keyway.

Output Options – Tapered Bushing Hollow Output Shaft Details

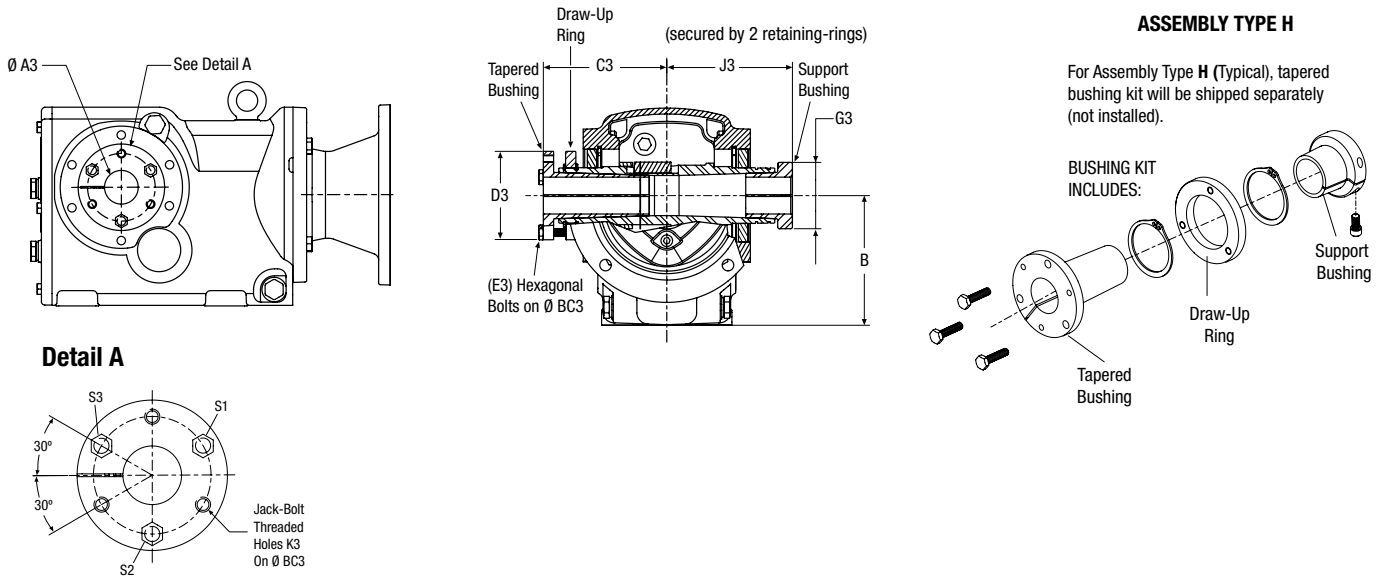


Dimensions in inches

SIZE	TYPE	DRIVEN SHAFT DIA. +/- 0.002	B	C3	D3	E3		BC3	G3	J3	K3	KIT PART #
						SPEC.	LENGTH					
2033R	TP16	1.000	3.92	3.63	2.85	#10-24	1.00	2.25	2.50	3.84	#10-24	2030R-63K-P16
2043R	TP20	1.250	4.40	4.19	3.00	1/4-20	1.13	2.50	2.50	4.29	1/4-20	2040R-63K-P20
2063R	TP23	1.438	5.51	5.01	3.94	3/8-16	1.38	3.00	3.00	5.23	3/8-16	2060R-63K-P23
2073R	TP28	1.750	7.08	5.91	4.38	3/8-16	1.63	3.50	3.50	6.06	3/8-16	2070R-63K-P28

Bolt Tightening Sequence Table

SIZE	STEP 1 Apply Initial Torque - ft.lbs.			STEP 2 Apply Secondary Torque - ft.lbs.			STEP 3 Apply Final Torque - ft.lbs.		
	S1	S2	S3	S1	S2	S3	S1	S2	S3
2033R	1.5	1.5	1.5	3.0	3.0	3.0	5.0	5.0	5.0
2043R	2.7	2.7	2.7	5.5	5.5	5.5	9.0	9.0	9.0
2063R	7.5	7.5	7.5	15.0	15.0	15.0	30.0	30.0	30.0
2073R	7.5	7.5	7.5	15.0	15.0	15.0	30.0	30.0	30.0



Shaft Covers

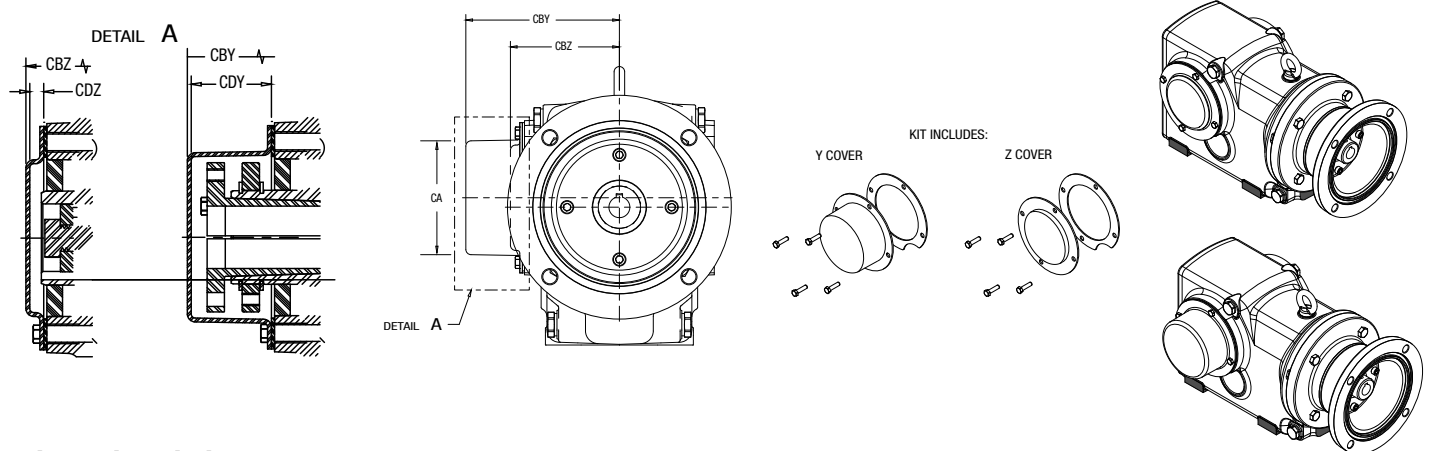

Dimensions in inches

SIZE	TYPE	CA	CBY	CDY	Y-KIT PART #	CBZ	CDZ	Z-KIT PART #
2033R	TP16	3.16	4.13	1.58	2033R-33-A-K	2.90	0.35	2033R-33-B-K
2043R	TP20	3.40	4.59	1.61	2043R-33-A-K	3.26	0.28	2043R-33-B-K
2063R	TP23	4.34	5.43	1.95	2063R-33-A-K	3.70	0.22	2063R-33-B-K
2073R	TP28	4.78	6.50	2.30	2073R-33-A-K	4.54	0.34	2073R-33-B-K

Output & Mounting Options – Hollow Output Shaft Details

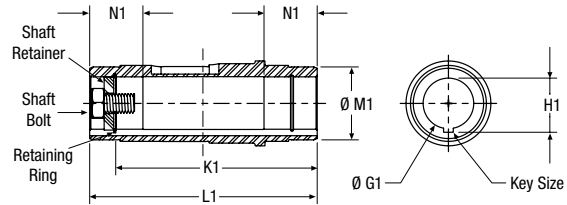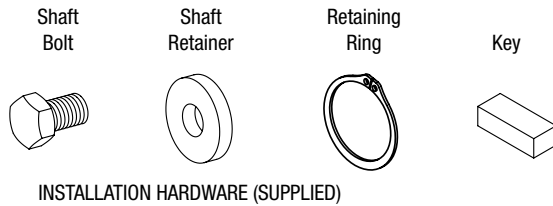

Dimensions in inches

SIZE	PART NO. IDENTIFIER	G1 +0.0005/ +0.0015	Key Size		H1	Shaft Bolt		K1	L1	M1	N1
			Sq.	Length		Spec.	Length				
2033R	P20	1.2500	1/4	2.00	1.37	1/2-13	1.25	4.41	5.09	1.73	1.38
	P20	1.2500	1/4	2.00	1.37	7/16-14	1.00				
2043R	P22	1.3750	5/16	1.81	1.53	1/2-13	1.00	5.30	6.06	1.89	1.46
	P23	1.4375	3/8	2.25	1.61	1/2-13	1.00				
2063R	P23	1.4375	3/8	2.25	1.61	1/2-13	1.00	6.40	7.16	2.13	1.46
	P24	1.5000	3/8	2.25	1.68	5/8-11	1.75				
2073R	P31	1.9375	1/2	2.63	2.17	1/2-13	1.25	7.20	8.27	2.72	1.96
	P32	2.0000	1/2	2.63	2.23						

Dimensions in mm


SIZE	PART NO. IDENTIFIER	G1	Key Size		H1	Shaft Bolt		K1	L1	M1	N1
			Rect.	Length		Spec.	Length				
2033R	PM30	30.00	8x7	40	33.4	M10x1.5	25	111.9	129.3	44.0	35.05
2043R	PM30	30.00	8x7	40	33.4	M10x1.5	25	134.6	153.9	48.0	37.08
	PM35	35.00	10x8	45	38.4	M12x1.75	30				
2063R	PM40	40.00	12x8	50	43.4	M16x2.0	40	162.6	181.9	54.0	37.08
2073R	PM50	50.00	14x9	80	53.9	M16x2.0	40	182.8	210.0	69.0	49.78

Output shaft key is provided with gear drive. Customer's driven shaft requires standard width and depth keyway.

Output Flange Details

ASSEMBLY TYPES

Shown with hollow output shaft option

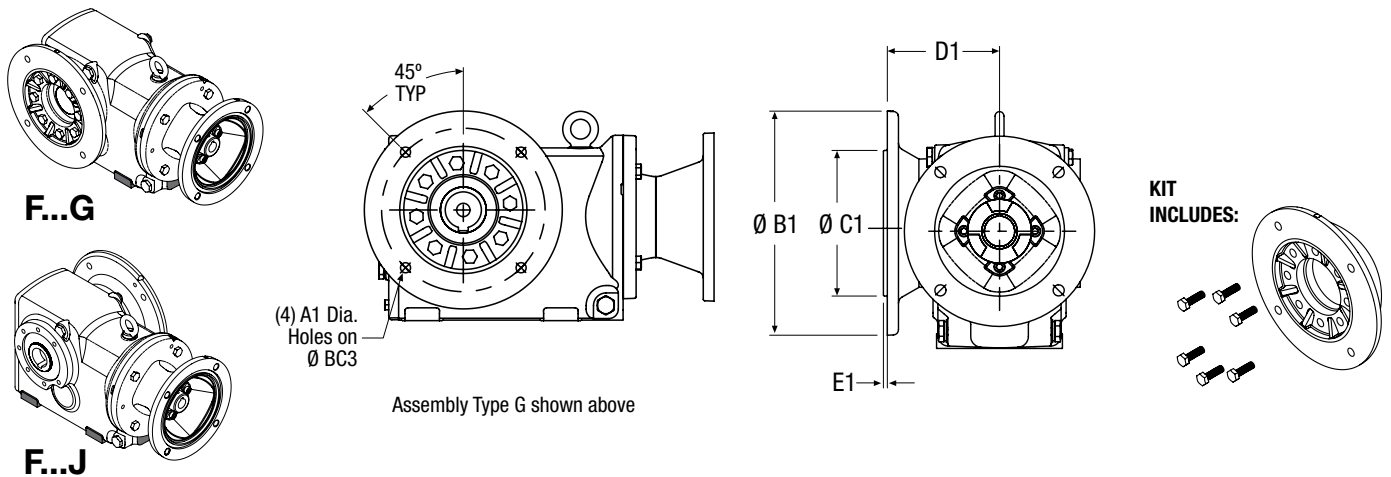


Dimensions in inches (mm)

SIZE	A1	BC3	B1	C1 +0 / -0.001 (+0 / -0.03)	D1	E1	KIT PART #
SSRF2033R-F	0.35 (8.9)	5.12 (130)	6.30 (160)	4.331 (110)	3.49 (88.6)	0.14 (3.6)	SS2030R-21K-160
SSRF2043R-F	0.43 (10.9)	6.50 (165)	7.87 (200)	5.119 (130)	3.94 (100)	0.14 (3.6)	SS2040R-21K-200
SSRF2063R-F	0.53 (13.5)	8.46 (215)	9.84 (250)	7.087 (180)	4.45 (113)	0.16 (4.1)	SS2060R-21K-250
SSRF2073R-F	0.53 (13.5)	10.43 (265)	11.81 (300)	9.056 (230)	5.59 (142)	0.16 (4.1)	SS2070R-21K-300

Note: Output flange will be shipped assembled to gear drive, unless ordered separately using the kit part number.


Mounting Options – Torque Arm Details

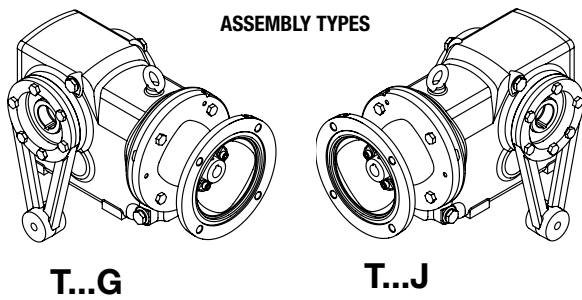

T...G

T...J

For Assembly Type **H** (Typical), torque arm kit will be shipped separately (not installed).

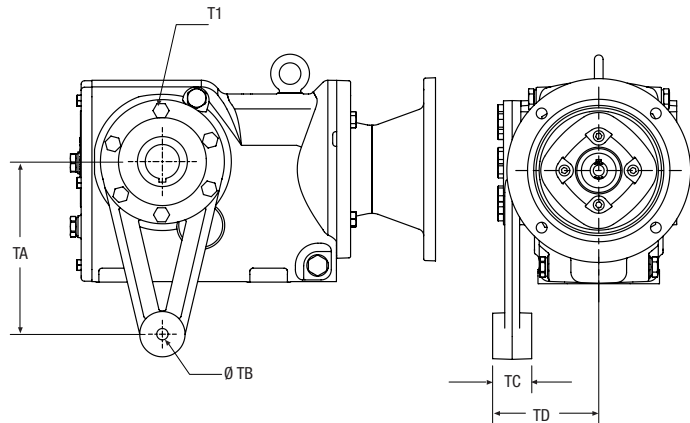

Dimensions in inches






SIZE	TA	T1 (mm)		TB	TC	TD	Degrees of Rotation
		Spec.	Length				
SSRF2033R-T	5.51	M8	25	0.42	1.42	3.44	72°
SSRF2043R-T	6.30	M10	25	0.42	1.1	3.63	60°
SSRF2063R-T	7.87	M12	30	0.66	1.5	4.45	60°
SSRF2073R-T	9.84	M12	35	0.66	2.36	5.55	45°

KIT PART #
SS2030R-76K
SS2040R-76K
SS2060R-76K
SS2070R-76K

Early versions of this design were manufactured from plate with welded gussets which have a "TD" dimension of 3.54" (For SSRF2043-R-T) and 4.30" (For SSRF2063R-T). Note: To avoid damage during transit, all torque arms will be shipped disassembled from gear drive.

Base Mounting Feet Details

Shown with solid output shaft option (Assembly Type G)

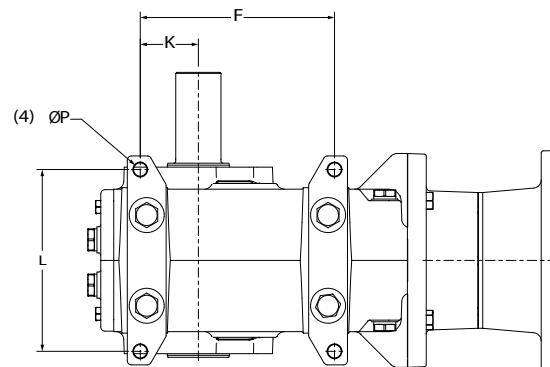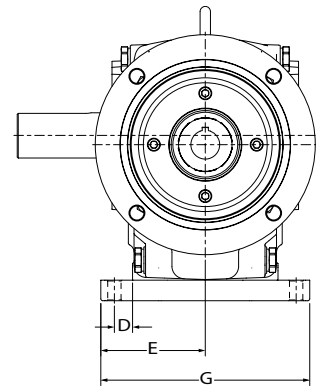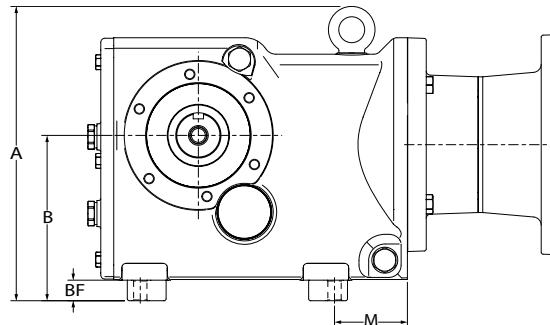

KIT INCLUDES:

Dimensions in inches

SIZE	A	B	M	BF	D	E	G	F	L	K	P
SSRF2033R-B	7.68	4.55	2.20	0.63	0.55	2.98	5.95	4.89	5.12	1.52	0.41
SSRF2043R-B	8.95	5.03	2.22	0.63	0.55	3.18	6.35	5.90	5.53	1.77	0.41
SSRF2063R-B	9.87	6.15	2.38	0.64	0.63	3.71	7.42	7.25	6.51	2.28	0.49
SSRF2073R-B	12.20	7.88	3.23	0.80	0.91	4.40	8.80	7.47	7.72	2.28	0.65

KIT PART #
SS2030R-11HK
SS2040R-11HK
SS2060R-11HK
SS2070R-11HK

* Kit Part # can be used if ordering separately.

Installation Aids


Mounting Registers (Standard Feature)

Mounting Registers on the 2000 Series products enable a simpler installation for Base Mounted units.

Use the following steps to assist in the alignment between the reducer output shaft and the shaft being driven (driven shaft).

1. Establish a reference edge that is parallel to the driven shaft using Dimension M from page 21 as the offset.
2. Bank Reference Face 3 of the reducer against your reference edge.
3. Use Reference Face 2 of the reducer for any fine angular (yaw) or lateral adjustments.

Contacting thumbscrews against Reference Face 2 is a clever method for higher precision alignment requirements.

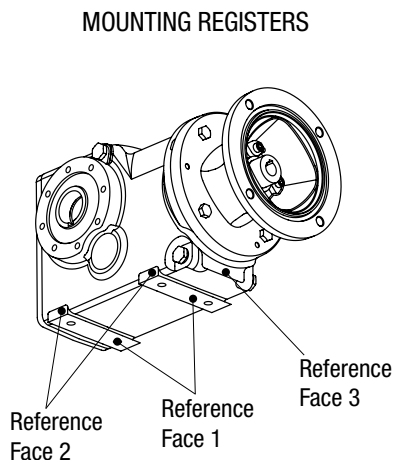

Tapered Bushing Option


The Tapered Bushing is a valuable option that ensures a simple and secure installation for Shaft Mounted units.

Use the following steps to assist in the alignment between the reducer output shaft and the shaft being driven (driven shaft). See page 24 for additional reference.

1. Make a score mark on your Driven Shaft at a length equal to the Table 1 dimension from the mounting end.
2. Slide Support Bushing onto driven shaft, flange first, until the flange reaches the score mark & secure with clamp screw.
3. Mount Reducer onto Driven Shaft allowing it to slide through the Tapered Bushing on the opposite end.
Expect the Tapered Bushing to be pushed outward from the reducer as it expands inside the outer bore.
4. Align the holes between the Tapered Bushing and the Draw-Up Ring.
5. Using a mallet, tap the Tapered Bushing inward until the bolts are able to engage the Draw-Up Ring threads.
6. Tighten bolts evenly in sequence indicated in Bolt Tightening Sequence Table on page 24.
7. Readjust Support Bushing as needed to ensure full engagement of taper and re-secure clamp screw.

Table 1

	Used Length of Driven Shaft	
	(in)	(mm)
2033R	7.47	190
2043R	8.48	216
2063R	10.24	260
2073R	12.04	306

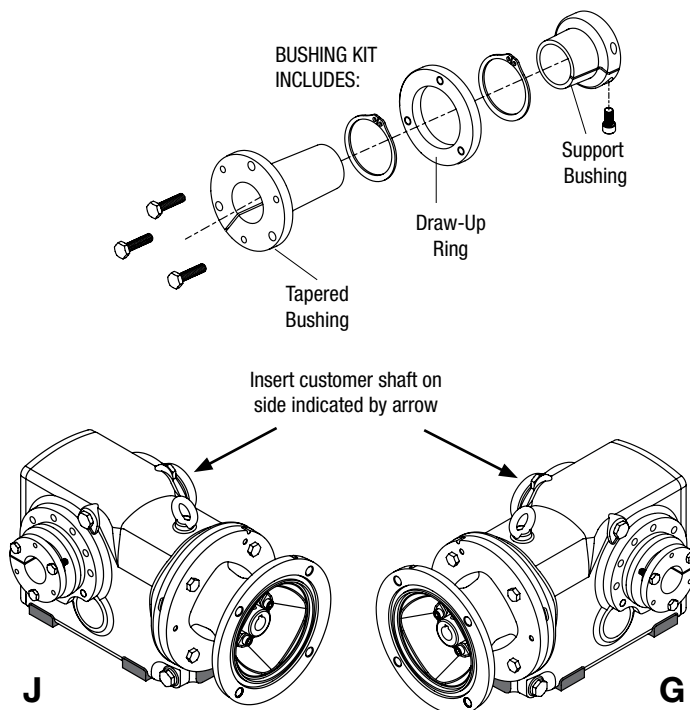

Ratios and Performance

4 Reductions

■ Available Options ○ Optional

Model No.	Output Speed (1750 rpm Input)	Actual Ratio	Ratio used in Part No.	Input Power (HP)	Output Torque Rating (lbf-in)	NEMA C-Face Input
						B5
SSRFPW2033R	14	125.00	125	0.43	1840	■
	12	144.15	144	0.38	1850	■
	12	149.80	150	0.36	1850	■
	9.8	179.25	179	0.30	1860	■
	9.3	188.95	189	0.29	1870	■
	7.9	222.30	222	0.25	1880	■
	7.0	248.95	249	0.22	1880	■
	5.9	298.05	298	0.18	1890	■
	5.2	339.00	339	0.16	1900	■
	4.8	362.70	363	0.15	1900	■
	4.2	418.45	418	0.13	1910	■
SSRFPW2043R	3.6	489.05	489	0.11	1920	■
	3.3	531.90	532	0.10	1920	■
	12	146.50	147	0.72	3580	■
	12	151.15	151	0.7	3590	■
	10	176.95	177	0.6	3610	■
	8.8	198.05	198	0.54	3620	■
	7.5	232.05	232	0.46	3640	■
	7.2	243.75	244	0.44	3650	■
	6.2	284.15	284	0.38	3660	■
	5.5	316.50	317	0.34	3680	■
	4.9	354.45	354	0.3	3690	■
	4.7	376.00	376	0.3	3700	■
	4.1	425.60	426	0.25	3710	■
SSRFPW2063R	3.9	454.30	454	0.24	3720	■
	3.4	521.85	522	0.21	3730	■
	2.9	607.40	607	0.18	3750	■
	2.7	659.35	659	0.16	3750	■
	12	151.05	151	0.75	8340	■
	10	178.05	178	0.75	6340	■
	9.1	191.95	192	0.75	7540	■
	7.9	221.60	222	0.75	7570	■
	7.2	243.85	244	0.75	7600	■
	6.1	284.85	285	0.75	7630	■
	5.9	298.35	298	0.75	7650	■
	5.1	344.75	345	0.65	7670	■
	4.6	381.85	382	0.59	7690	■
SSRFPW2073R	3.9	450.20	450	0.5	7720	■
	3.5	507.15	507	0.45	7740	■
	3.2	540.15	540	0.42	7750	■
	2.8	617.70	618	0.37	7770	■
	2.4	716.00	716	0.32	7790	■
	8.7	200.20	200	0.75	4800	■
	7.8	225.80	226	0.75	5400	■
	6.8	255.90	256	0.75	6100	■
	6.0	291.70	292	0.75	7000	■
	5.5	318.55	319	0.75	7600	■
	4.8	368.10	368	0.75	8800	■
	4.6	384.35	384	0.75	9200	■
	4.0	440.40	440	0.75	10600	■
SSRFPW2073R	3.6	485.25	485	0.75	11600	■
	3.1	567.80	568	0.75	13600	■
	2.7	636.60	637	0.66	14600	■
	2.6	676.40	676	0.62	14600	■
	2.3	770.10	770	0.54	14400	■
	2.0	888.80	889	0.47	14600	■
	1.8	960.90	961	0.45	14700	■

Ratings shown reflect maximum gear capacity based on AGMA Standards (Service Factor = 1.0) with Klybersynth UH1 6-460.


For input speeds above 1750 RPM, do not exceed maximum listed input horsepower.

Not recommended for use in applications with repetitive vibrational or impact loading.

A2 SS2000R Series Helical Bevel Gear Drives

Dimensions

4 Reductions

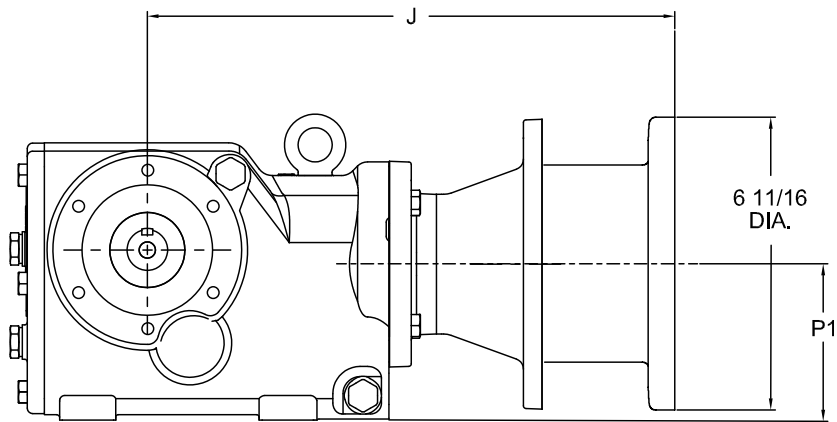


Size	NEMA C-Face Input	J	P1
SSRFPW2033R	B5	14.2	3.59
SSRFPW2043R	B5	15.1	4.12
SSRFPW2063R	B5	15.6	4.71
SSRFPW2073R	B5	16.4	5.85

SS2000 Series Helical Inline Gear Drives B1




Laser marked nameplate provides worry-free part identification while maintaining a smooth, unetched surface



Integrated o-rings

3-Jaw Coupling

NEMA or IEC C-Face motor input with 3-Jaw coupling



IP69K
When ordered with high pressure washdown seal option*



Larger shaft diameters available

303 Stainless Steel Shaft

H1 Food grade Klubersynth UH1 6-460 maximizes torque capacity and efficiency



Unique **Mounting Registers** allow for quick precision alignment

The **Original Domed Crown™** unique rounded housing prevents foreign matter adherence and fluid accumulation

Field installable piloted output flange for mounting flexibility

Stainless Steel Exterior
316 Castings
303/304 Machined Components


Polished matte finish maintains clean appearance throughout operation

Optional high pressure washdown seal available*

Large diameter oil fill/drain holes for faster oil change

NEMA or IEC C-Face motor input with 3-Jaw coupling

Rare-Earth Magnets near gear mesh provide automatic entrapment of wear debris ensuring longer life

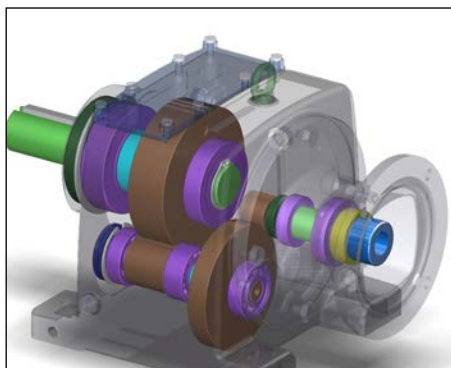

Energy Efficient Design

With efficiency of 98% per gear mesh, Series 2000 Inline Helical Gear Drives and Gear Motors are ideal for use in applications with:

- continuous or high duty cycle operations
- high-ratio reduction
- limited access applications where long life is a necessity

B1 SS2000 Series Helical Inline Gear Drives

Ordering Information

Example: **SSRF2053F-65KC-B7-S2-D22-HUTFSS-9**

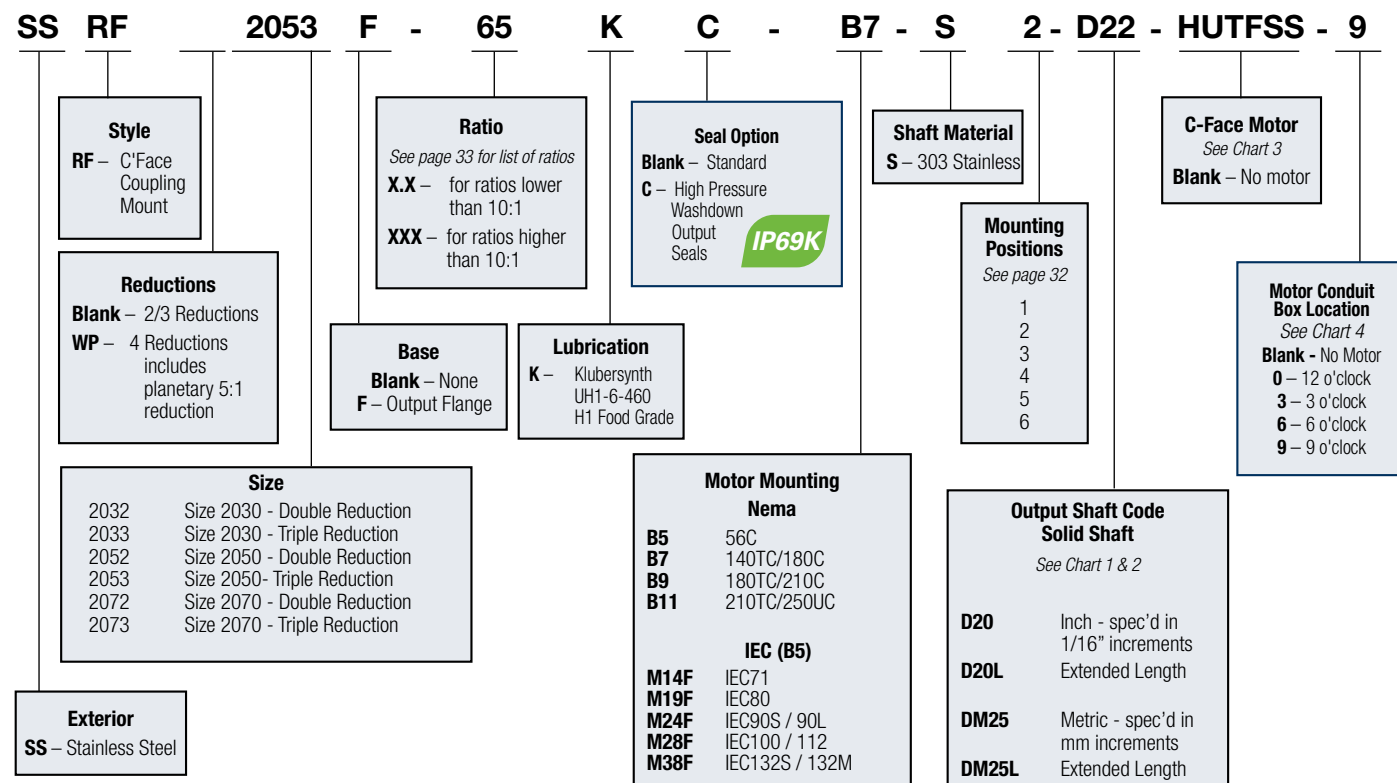


Chart 1: Solid Output Shaft Codes – Inch Sizes

Nominal Diameter	Output Shaft Code	2032/2033	2052/2053	2072/2073	Decimal Size	Key Size
1	D16	S			1.0000	.25x.25x1.31
1-1/8	D18	•			1.1250	.25x.25x1.64
1-3/16	D19	•			1.1875	.25x.25x1.65
1-1/4	D20	S	S		1.2500	.25x.25x1.66
1-3/8	D22		S		1.3750	.31x.31x1.81
1-7/16	D23		•		1.4375	.38x.38x2.00
1-1/2	D24		•		1.5000	.38x.38x2.00
1-5/8	D26		S	S	1.6250	.38x.38x2.25
1-3/4	D28			S	1.7500	.38x.38x2.75
1-15/16	D31			•	1.9375	.50x.50x2.00
2	D32			S	2.0000	.50x.50x2.62

S = Standard • = Optional

Additional shaft diameter sizes available upon request.

Output shaft key is provided with gear drive.

Customer's driven shaft requires standard width and depth keyway.

Chart 2: Solid Output Shaft Codes – Metric Sizes

Nominal Diameter (mm)	Output Shaft Code	2032/2033	2052/2053	2072/2073	Decimal Size	Key Size
25	DM25	S			25.00	8x7x40
30	DM30	S	S		30.00	8x7x50
35	DM35		S		35.00	10x8x56
40	DM40		S	S	40.00	12x8x70
50	DM50			S	50.00	14x9x80

Additional shaft diameter sizes available upon request.

Chart 3: Stainless Steel AC Motors


Part #	HP	Type	Frame Size
EUT-SS	0.33	TENV	56C
FUT-SS	0.5	TENV	56C
NEW FYTF-SS	0.5	TEFC	56C
NEW FYTF-SS	0.5	TEFC	56C
GUT-SS	0.75	TENV	56C
HUT5/8-SS	1.0	TENV	56C
HUTF5/8-SS	1.0	TEFC	56C
NEW HYTF5/8-SS	1.0	TEFC	56C
HUT-SS	1.0	TENV	140TC
HUTF-SS	1.0	TEFC	140TC
JUTF-SS	1.5	TEFC	140TC
KUTF-SS	2.0	TEFC	140TC
LUTF-SS	3.0	TEFC	180TC
MUTF-SS	5.0	TEFC	180TC
NUTF-SS	7.5	TEFC	210TC
PUTF-SS	10.0	TEFC	210TC

All above motors are 230/460V except FYTF-SS and HYTF5/8-SS which are 575V

TENV = Totally enclosed, non-ventilated

TEFC = Totally enclosed, fan-cooled



Chart 4: Conduit Box Locations

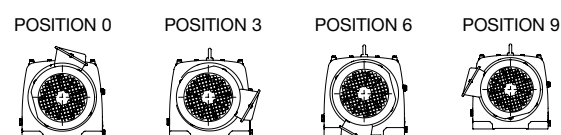

Motor Installation Mounting Positions & Lubrication

Coupling Location for Motor Installation

Motor Frame		"X"
B5	56TC	1.600 ± 0.020
B7	140TC	1.485 ± 0.020
B9	180TC	2.090 ± 0.020
B11	210TC	2.620 ± 0.020
B13	250TC	3.120 ± 0.020

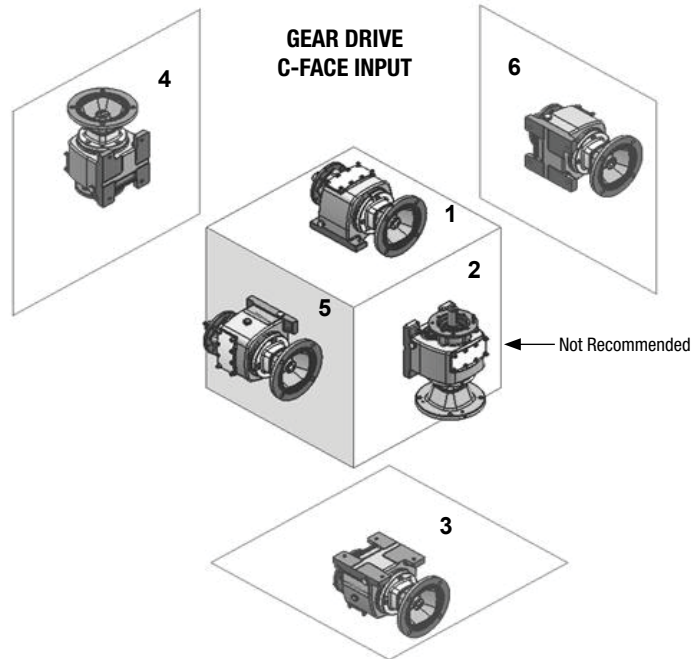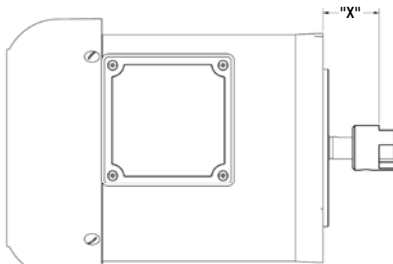

Lubrication

Klubersynth UH1 6-460 is recommended for the SS2000 Series gear drives for optimum performance. Normal full-load operating temperatures range between 130°F -150°F. During initial break-in of the gear drive, higher than normal operating temperatures may result. All gear drives are supplied with UH1 6-460 synthetic oil (unless specified otherwise) with quantity listed below for standard mounting position 1 or to mounting specified at time of order. These gear drives are designed with internal features to

reduce the impact of metallic wear debris, which should increase maintenance intervals. Relubrication is recommended for 10,000 hours or more frequently when operating in highly contaminated environments. Satisfactory performance may be obtained in some applications with non-synthetic oils, but will require more frequent oil changes. Recommendations are based on input speed of 1800 RPM nominal. For higher input speeds, consult factory.

RECOMMENDED LUBRICANT	Reducer Designation	Ambient (Room) Temperature	ISO Viscosity Grade No.	Viscosity Range SUS @ 100F	Part Number (Quart)	Comments
Klubersynth UH1 6-460 Synthetic	K	-20°F to +225°F (-29°C to 107°C)	460	1950/2500	65159	H1 Food-Grade

Notes: Upper temperature limit is dictated by reducer components and not the oil.

	Mounting Position					
	1	2	3	4	5	6
Plug A	Opt. Vent	Opt. Vent	Oil Drain	Oil Drain	Oil-Fill	—
Plug B	—	Oil-Fill	Oil-Fill	—	Oil Drain	Oil-Fill
Plug C	Oil-Fill	—	—	—	Opt. Vent	Oil Drain
Plug D	Oil Drain	Oil Drain	Opt. Vent	Oil-Fill	Opt. Vent	Oil Drain


Notes:

- Oil-Fill** Plugged from factory. Port used during regular maintenance intervals for Oil-Fill. Defines approximate oil-level during operation.
 - Opt. Vent** Plugged from factory. A 5psi pressure vent plug is supplied uninstalled with each product. Defines optional location for installation of that pressure vent.
 - Oil Drain** Plugged from factory. Port used during regular maintenance intervals for draining used oil. Re-plug prior to oil-fill.
 - Position 2*** Not preferred and not recommended as a Mounting Position
 - Position 4*** Consult factory for venting options.
 - Position 6*** Consult factory for venting options.
- All products supplied from factory lubed for Position 1 unless specified otherwise

Lube Capacity in Quarts

	Mounting Position					
	1	2	3	4	5	6
2032/2033	0.5	1.25	1.13	1.2	0.79	1.2
2052/2053	0.88	1.75	2.25	2.63	2.25	2.25
2072/2073	2.1	4.12	2.51	5.1	2.51	2.51

Oil Plug and Vent Plug Location Details

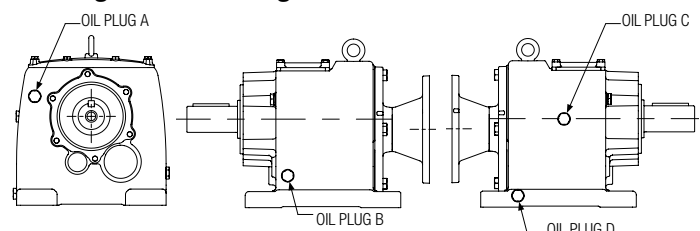

Ratios and Performance

2 and 3 Reductions

■ Standard ○ Optional

Model No.	Output Speed (RPM)	Actual Ratio	Ratio used in Part No.	Input Power (HP)	Output Torque Rating (lb-in)	NEMA C-Face Input				IEC C-Face Input				
						B5	B7	B9	B11	M14F	M19F	M24F	M28F	M38F
SSRF2032 (2 Reductions)	590	2.97	3.0*	10.6	1,080	■	■	○		■	■	○		
	513	3.41	3.4*	8.7	1,020	■	■	○		■	■	○		
	429	4.05	4.1*	7.7	1,090	■	■	○		■	■	○		
	407	4.32	4.3*	7.5	1,110	■	■	○		■	■	○		
	346	5.06	5.1*	6.9	1,220	■	■	○		■	■	○		
	309	5.67	5.7*	6.5	1,270	■	■	○		■	■	○		
	258	6.67	6.8	5.3	1,230	■	■	○		■	■	○		
	219	7.97	8.0	5.2	1,420	■	■	○		■	■	○		
	183	9.47	9.5	4.6	1,520	■	■	○		■	■	○		
	174	10.11	10	4.5	1,560	■	■	○		■	■	○		
	148	11.83	12	4.1	1,660	■	■	○		■	■	○		
	132	13.25	13	3.8	1,730	■	■	○		■	■	○		
	110	15.60	16	3.4	1,840	■	■	○		■	■	○		
	97	18.05	18	2.9	1,830	■	■			■	■			
	91	19.31	19	2.8	1,870	■	■			■	■			
	79	22.27	22	2.4	1,830	■	■			■	■			
	67	26.03	26	2.0	1,760	■	■			■	■			
	62	28.32	28	1.8	1,780	■	■			■	■			
SSRF2033 (3 Reductions)	73	24.13	24	2.2	1,840	■	■			■	■			
	61	28.73	29	1.9	1,860	■	■			■	■			
	54	32.40	32	1.7	1,860	■	■			■	■			
	48	36.72	37	1.5	1,860	■	■			■	■			
	45	39.17	39	1.4	1,860	■	■			■	■			
	39	44.81	45	1.2	1,860	■	■			■	■			
	36	48.08	48	1.1	1,860	■	■			■	■			
	31	55.76	56	1.0	1,860	■				■				
	29	61.18	61	0.90	1,860	■				■				
	25	69.33	69	0.79	1,860	■				■				
	24	73.96	74	0.74	1,860	■				■				
	21	84.61	85	0.65	1,860	■				■				
	19	90.77	91	0.60	1,860	■				■				
	17	105.28	105	0.52	1,860	■				■				
	14	123.66	124	0.44	1,860	■				■				
	13	134.82	135	0.41	1,860	■				■				
SSRF2052 (2 Reductions)	542	3.23	3.2	20	2,240	○	○	■	■	○	○	■	■	○
	472	3.71	3.7	18.5	2,370	○	○	■	■	○	○	■	■	○
	399	4.39	4.4	16.8	2,550	○	○	■	■	○	○	■	■	○
	347	5.05	5.0	15.9	2,780	○	○	■	■	○	○	■	■	○
	300	5.82	5.8	14.5	2,930	○	○	■	■	○	○	■	■	
	273	6.41	6.4*	13.7	3,030	■	■	■	■	■	■	■	■	
	234	7.49	7.5*	12.3	3,180	■	■	■	■	■	■	■	■	
	223	7.84	7.8*	11.7	3,180	■	■	■	■	■	■	■	■	
	193	9.06	9.1*	10.4	3,260	■	■	■	■	■	■	■	■	
	187	9.35	9.4	10.5	3,390	■	■	■	■	■	■	■	■	
	162	10.79	11	9.5	3,540	■	■	■	■	■	■	■	■	
	147	11.88	12*	8.9	3,670	■	■	■	■	■	■	■	■	
	126	13.88	14*	8.1	3,890	■	■	■	■	■	■	■	■	
	120	14.53	15*	7.8	3,930	■	■	■	■	■	■	■	■	
	104	16.79	17*	7.1	4,130	■	■	■	■	■	■	■	■	
	94	18.60	19*	6.4	4,130	■	■	■	■	■	■	■	■	
	80	21.93	22	5.3	3,980	■	■	■	■	■	■	■	■	
	71	24.70	25	4.7	4,060	■	■	■	■	■	■	■	■	
	67	26.31	26	4.5	4,070	■	■	■	■	■	■	■	■	
	65	26.97	27	4.5	4,090	○	○	■	■	○	○	■	■	
SSRF2053 (3 Reductions)	58	30.18	30	4.1	4,150	■	■	■	■	■	■	■	■	
	49	35.36	35	3.5	4,190	■	■	■	■	■	■	■	■	
	47	37.14	37	3.2	4,050	■	■	■	■	■	■	■	■	
	40	43.30	43	2.8	4,100	■	■			■	■			
	36	48.23	48	2.5	4,100	■	■			■	■			
	32	54.01	54	2.2	4,090	■	■			■	■			
	31	57.29	57	2.1	4,080	■	■			■	■			
	27	64.85	65	1.8	3,990	■	■			■	■			
	25	69.23	69	1.7	3,940	■	■			■	■			
	22	80.55	81	1.5	4,190	■	■			■	■			
	20	89.71	90	1.4	4,150	■	■			■	■			
	17	100.46	100	1.2	4,220	■	■			■	■			
	16	106.58	107	1.1	4,130	■	■			■	■			
	15	120.63	121	1.0	4,160	■				■				
	14	128.77	129	0.95	4,120	■				■				
	12	147.92	148	0.84	4,210	■				■				
	10	172.17	172	0.71	4,170	■				■				
	9	186.89	187	0.66	4,190	■				■				

Ratings shown reflect maximum gear capacity based on AGMA standards (service factor = 1.0) with Klubersynth UH1-6-460.

For input speeds above 1750 RPM, Do not exceed maximum listed input horsepower.

* Depending on the input option chosen, reducer ratios denoted with * may have an overall capacity lower than the values shown (values represent gear capacity). Contact factory for details

■ Standard ○ Optional

2 and 3 Reductions

Ratios and Performance

Model No.	Output Speed (RPM)	Actual Ratio	Ratio used in Part No.	Input Power (HP)	Output Torque Rating (lb-in)	NEMA C-Face Input					IEC C-Face Input					
						B5	B7	B9	B11	B13	M14F	M19F	M24F	M28F	M38F	M42F
SSRF2072 (2 Reductions)	407	4.29	4.3*	30	4,430			■	■	○			■	■	○	○
	361	4.84	4.8*	27	4,500			■	■	○			■	■	○	○
	329	5.31	5.3	25	4,640			■	■	○			■	■	○	○
	292	5.99	6.0	24	4,920			■	■	○			■	■	○	○
	258	6.79	6.8	22	5,280			■	■	○			■	■	○	○
	226	7.74	7.7	21	5,530			■	■	○			■	■	○	○
	207	8.45	8.5*	18.5	5,420			■	■	○			■	■	○	○
	182	9.64	9.6	17.2	5,730			■	■	○			■	■	○	○
	161	10.88	11	16.1	6,040			■	■	○			■	■	○	○
	142	12.33	12	14.8	6,310			■	■				■	■		
	125	14.05	14	13.5	6,580			■	■				■	■		
	114	15.34	15*	12.6	6,670	■	■	■	■		■	■	■	■		
	99	17.73	18*	11.6	7,110	■	■	■	■		■	■	■	■		
	95	18.51	19*	10.9	6,970	■	■	■	■		■	■	■	■		
	83	21.21	21*	10.1	7,380	■	■	■	■		■	■	■	■		
SSRF2073 (3 Reductions)	75	23.37	23*	9.2	7,440	■	■	■	■		■	■	■	■		
	69	25.23	25	8.2	7,050	○	○	■	■		○	○	■	■		
	60	29.00	29	7.5	7,410	○	○	■			○	○	■			
	52	33.47	33	6.6	7,450	○	○	■			○	○	■			
	48	36.83	37	6.0	7,500	■	■	■			■	■	■			
	41	43.03	43	5.0	7,340	■	■	■			■	■	■			
	39	45.06	45	4.7	7,250	■	■	■			■	■	■			
	34	52.07	52	4.2	7,390	■	■	■			■	■	■			
	30	57.68	58	3.8	7,370	■	■	■			■	■	■			
	27	65.77	66	3.3	7,470	■	■	■			■	■	■			
	23	76.82	77	2.9	7,630	■	■				■	■				
	22	80.46	80	2.7	7,240	■	■				■	■				
	19	92.97	93	2.4	7,480	■	■				■	■				
	17	102.99	103	2.1	7,330	■	■				■	■				
	14	121.42	121	1.8	7,480	■	■				■	■				
	13	136.78	137	1.7	7,740	■	■				■	■				
	12	145.67	146	1.5	7,570	■	■				■	■				
	11	166.59	167	1.3	7,590	■					■	■				
	9	193.10	193	1.2	7,560	■					■	■				


Ratings shown reflect maximum gear capacity based on AGMA standards (service factor = 1.0) with Klubersynth UH1-6-460.

For input speeds above 1750 RPM, do not exceed maximum listed input horsepower.

* Depending on the input option chosen, reducer ratios denoted with * may have an overall capacity lower than the values shown (values represent gear capacity). Contact factory for details

B1 SS2000 Series Helical Inline Gear Drives

Mounting Details

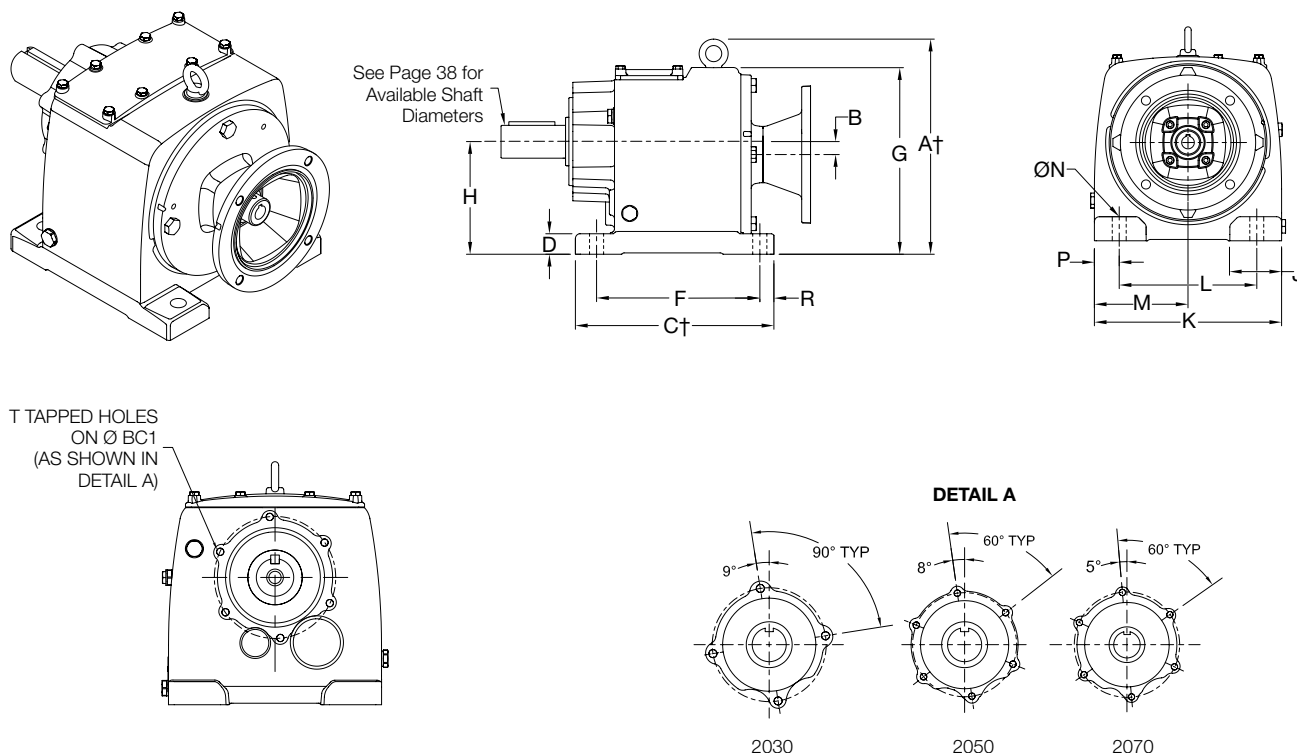





Dimensions in inches (mm)

SIZE	A	B	C	D	F	L	G	H +/-0.010 (+/-0.25)	J	K
SSRF2032 SSRF2033	-	0.39 (10.0)	6.30 (160.0)	0.71 (18.0)	5.12 (130.0)	4.33 (110.0)	5.90 (149.9)	3.530 (89.66)	1.60 (40.5)	6.28 (159.5)
SSRF2052 SSRF2053	8.80 (223.6)	0.45 (11.4)	7.83 (198.8)	0.80 (20.3)	6.50 (165.1)	5.31 (134.9)	7.34 (186.4)	4.520 (114.81)	2.41 (61.2)	7.95 (202.0)
SSRF2072 SSRF2073	10.50 (266.8)	0.63 (16.1)	9.69 (246.1)	1.00 (25.4)	8.07 (205.0)	6.69 (169.9)	9.12 (231.5)	5.500 (139.70)	2.51 (63.8)	9.25 (235.1)

SIZE	M +/-0.010 (+/-0.25)	N	P +/-0.010 (+/-0.25)	R +/-0.010 (+/-0.25)	T		BC1	APPROX. WEIGHT LBS (Kg)
					DIA(mm)	DEPTH		
SSRF2032 SSRF2033	3.140 (79.76)	0.35 (8.9)	0.974 (24.74)	0.527 (13.39)	M6	0.39 (10.0)	3.33 (84.5)	33 (15)
SSRF2052 SSRF2053	3.977 (101.02)	0.53 (13.5)	1.322 (33.58)	0.645 (16.38)	M6	0.39 (10.0)	3.80 (96.5)	53 (24)
SSRF2072 SSRF2073	4.627 (117.53)	0.68 (17.4)	1.282 (32.56)	0.715 (18.16)	M8	0.52 (13.3)	5.25 (133.4)	82 (37)


Note: Refer to Page 38 for Shaft details.
† Dimensions A and C are reference dimensions.

Motor Flange and Coupling Details NEMA

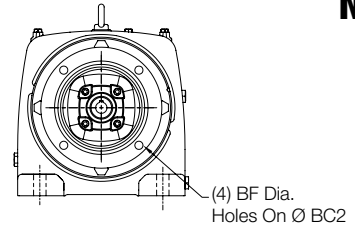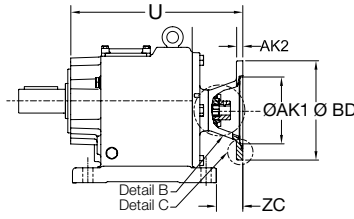


3 JAW COUPLING
BF SERIES (SUPPLIED)

DETAIL B



DETAIL C







Dimensions in inches (mm)

INPUT SIZE		U	AK1 +0.005/-0 (+0.13/-0)	AK2	BB	BD	BF	BC2	ZC	FX	CPL KEY SIZE (INCHES)	
											SQ.	LENGTH
SSRF2032 SSRF2033	B5 (56C)	9.74 (247.4)	4.500 (114.30)	0.430 (10.92)	0.183 (4.64)	6.686 (169.82)	0.391 (9.93)	5.875 (149.23)	3.10 (78.7)	0.625 (15.88)	3/16	1-3/8
	B7 (140TC)	10.64 (270.3)	4.500 (114.30)	0.470 (11.94)	0.183 (4.64)	6.686 (169.82)	0.391 (9.93)	5.875 (149.23)	4.00 (101.6)	0.875 (22.23)	3/16	1-3/8
SSRF2052 SSRF2053	B5 (56C)	10.74 (272.8)	4.500 (114.30)	0.430 (10.92)	0.183 (4.64)	6.686 (169.82)	0.391 (9.93)	5.875 (149.23)	2.40 (61.0)	0.625 (15.88)	3/16	1-3/8
	B7 (140TC)	11.64 (295.7)	4.500 (114.30)	0.470 (11.94)	0.183 (4.64)	6.686 (169.82)	0.391 (9.93)	5.875 (149.23)	3.30 (83.8)	0.875 (22.23)	3/16	1-3/8
	B9 (180TC)	13.34 (338.8)	8.500 (215.90)	0.590 (14.99)	0.203 (5.14)	8.976 (227.99)	0.531 (13.49)	7.250 (184.15)	5.00 (127.0)	1.125 (28.58)	1/4	1-3/4
	B11 (210TC)	15.44 (392.2)	8.500 (215.90)	0.590 (14.99)	0.203 (5.14)	8.980 (228.09)	0.531 (13.49)	8.181 (207.78)	7.10 (180.3)	1.375 (34.93)	5/16	2-3/8

Output shaft key is provided with gear drive. Customer's driven element requires standard width and depth keyway.


B1 SS2000 Series Helical Inline Gear Drives

Motor Flange and Coupling Details NEMA

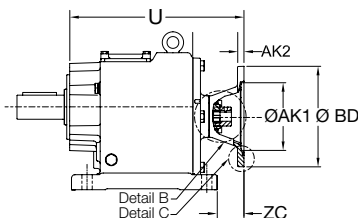


3 JAW COUPLING
BF SERIES (SUPPLIED)

DETAIL B



DETAIL C






Dimensions in inches (mm)

INPUT SIZE		U	AK1 +0.005/-0 (+0.13/-0)	AK2	BB	BD	BF	BC2	ZC	FX	CPL KEY SIZE (INCHES)	
											SQ.	LENGTH
SSRF2072 SSRF2073	B5 (56C)	11.96 (303.8)	4.500 (114.30)	0.430 (10.92)	0.183 (4.64)	6.686 (169.82)	0.391 (9.93)	5.875 (149.23)	1.80 (45.7)	0.625 (15.88)	3/16	1-3/8
	B7 (140TC)	12.86 (326.6)	4.500 (114.30)	0.470 (11.94)	0.183 (4.64)	6.686 (169.82)	0.391 (9.93)	5.875 (149.23)	2.70 (68.6)	0.875 (22.23)	3/16	1-3/8
	B9 (180TC)	14.56 (369.8)	8.500 (215.90)	0.590 (14.99)	0.203 (5.14)	8.976 (227.99)	0.531 (13.49)	7.250 (184.15)	4.40 (111.8)	1.125 (28.58)	1/4	1-3/4
	B11 (210TC)	16.76 (425.7)	8.500 (215.90)	0.590 (14.99)	0.203 (5.14)	8.980 (228.09)	0.531 (13.49)	8.181 (207.78)	6.60 (167.6)	1.375 (34.93)	5/16	2-3/8

Output shaft key is provided with gear drive. Customer's driven element requires standard width and depth keyway.

Output Shaft Details

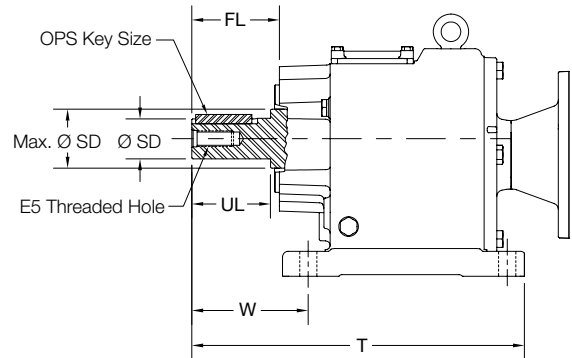

Dimensions in inches

SIZE	SHAFT SIZE	SD	SD Tolerance	Max. SD	UL	W	T	FL	E5		OPS KEY SIZE	
									Thread	Depth	SQ.	Length
SSRF2032 SSRF2033	D16	1.000	+0 -0.0005	1.378	1.780	2.950	8.597	2.219	3/8 -16	0.870	1/4	1-5/16
	D16L	1.000		1.378	3.160	4.330	9.977	3.599	3/8 -16	0.870	1/4	1-5/16
	D20	1.250		1.378	2.360	3.340	8.987	2.609	1/2 -13	1.120	1/4	1-11/16
SSRF2052 SSRF2053	D20	1.250	+0 -0.0005	1.772	2.360	3.540	10.685	2.658	1/2 -13	1.120	1/4	1-11/16
	D20L	1.250		1.772	3.150	3.150	11.475	3.448	1/2 -13	1.120	1/4	1-11/16
	D22	1.375		1.772	2.760	2.760	11.085	3.058	1/2 -13	1.120	5/16	1-13/16
SSRF2072 SSRF2073	D26	1.625	+0 -0.0010	1.772	3.150	3.150	11.475	3.448	5/8 -11	1.380	3/8	2-1/4
	D26	1.625		2.362	3.130	4.534	13.319	3.506	5/8 -11	1.380	3/8	2-1/4
	D26L	1.625		2.362	5.120	6.504	15.289	5.476	5/8 -11	1.380	3/8	2-1/4
	D32	2.000		2.362	3.940	5.324	14.109	4.296	3/4 -10	1.610	1/2	2-5/8


Dimensions in mm

SIZE	SHAFT SIZE	SD	SD Tolerance	Max. SD	UL	W	T	FL	E5		OPS KEY SIZE	
									Thread	Depth	Rect.	Length
SSRF2032 SSRF2033	DM25	25.000	-0.015 -0.002	35.005	45.17	74.89	218.31	56.31	M10	22.0	8 x 7	40
	DM25L	25.000		35.005	80.17	109.89	253.31	91.31	M10	22.0	8 x 7	40
	DM30	30.000		35.005	55.17	84.89	228.32	66.32	M10	22.0	8 x 7	50
SSRF2052 SSRF2053	DM30	30.000	-0.018 -0.002	45.005	70.00	70.00	281.46	77.57	M10	22.0	8 x 7	50
	DM30L	30.000		45.005	80.00	80.01	291.47	87.58	M10	22.0	8 x 7	50
	DM35	35.000		45.005	70.00	70.10	281.46	77.57	M12	28.0	10 x 8	56
SSRF2072 SSRF2073	DM40	40.000	-0.018 -0.002	45.005	80.00	80.01	291.47	87.58	M16	36.0	12 x 8	70
	DM40	40.000		59.995	80.00	115.16	338.30	89.05	M16	36.0	12 x 8	70
	DM40L	40.000		59.995	130.0	165.16	388.29	139.04	M16	36.0	12 x 8	70
	DM50	50.000		59.995	100.0	135.16	358.29	109.04	M16	36.0	14 x 9	80

Output shaft key is provided with gear drive. Customer's driven element requires standard width and depth keyway.

B1 SS2000 Series Helical Inline Gear Drives

Output Flange Details

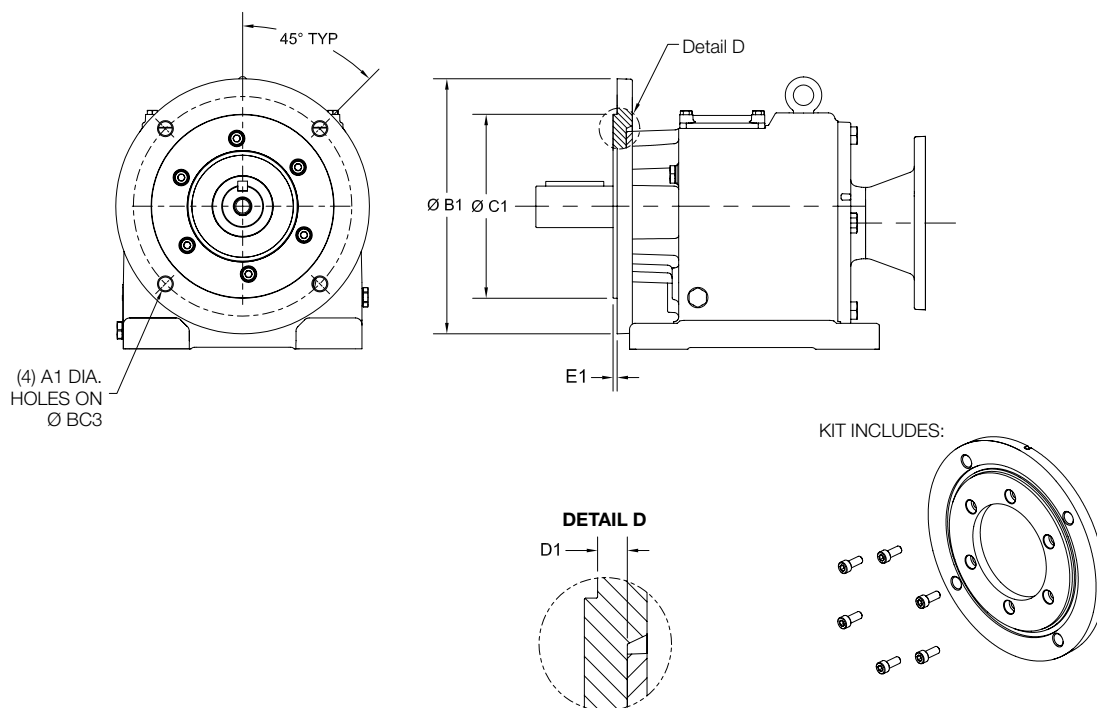

Dimensions in inches (mm)

SIZE	A1	BC3	B1	C1 +/- 0.001 (+/- 0.03)	D1	E1	KIT PART #
SSRF2032 SSRF2033	0.26 (6.6)	3.94 (100)	4.72 (120)	3.150 (80.00)	0.49 (12.4)	0.12 (3.0)	SS2030-21K
SSRF2052 SSRF2053	0.35 (9.0)	5.12 (130)	6.30 (160)	4.330 (110.00)	0.30 (7.6)	0.14 (3.5)	SS2050-21K
SSRF2072 SSRF2073	0.53 (13.5)	8.47 (215)	9.84 (250)	7.090 (180.00)	0.35 (8.9)	0.16 (4.0)	SS2070-21K

Mounting Registers


Mounting Registers on the 2000 Series products enable a simpler installation for Base Mounted units.

Use the following steps to assist in the alignment between the reducer output shaft and the shaft being driven (driven shaft).


1. Establish a reference edge that is parallel to the driven shaft using dimension M on page 35 as the offset.
2. Bank Reference Face 2 of the reducer against your reference edge.
3. Use Reference Face 3 of the reducer for any fine angular (yaw) or lateral adjustments.

Contacting thumbscrews against Reference Face 2 or 3 is a clever method for finer adjustment of alignment.

MOUNTING REGISTERS

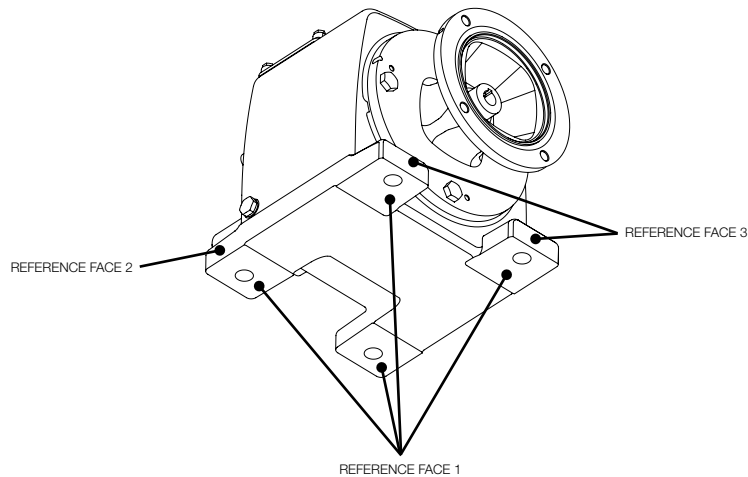

Single Stage Parallel Shaft Reduction (Stand-Alone or Prefix for other SS Product Families)

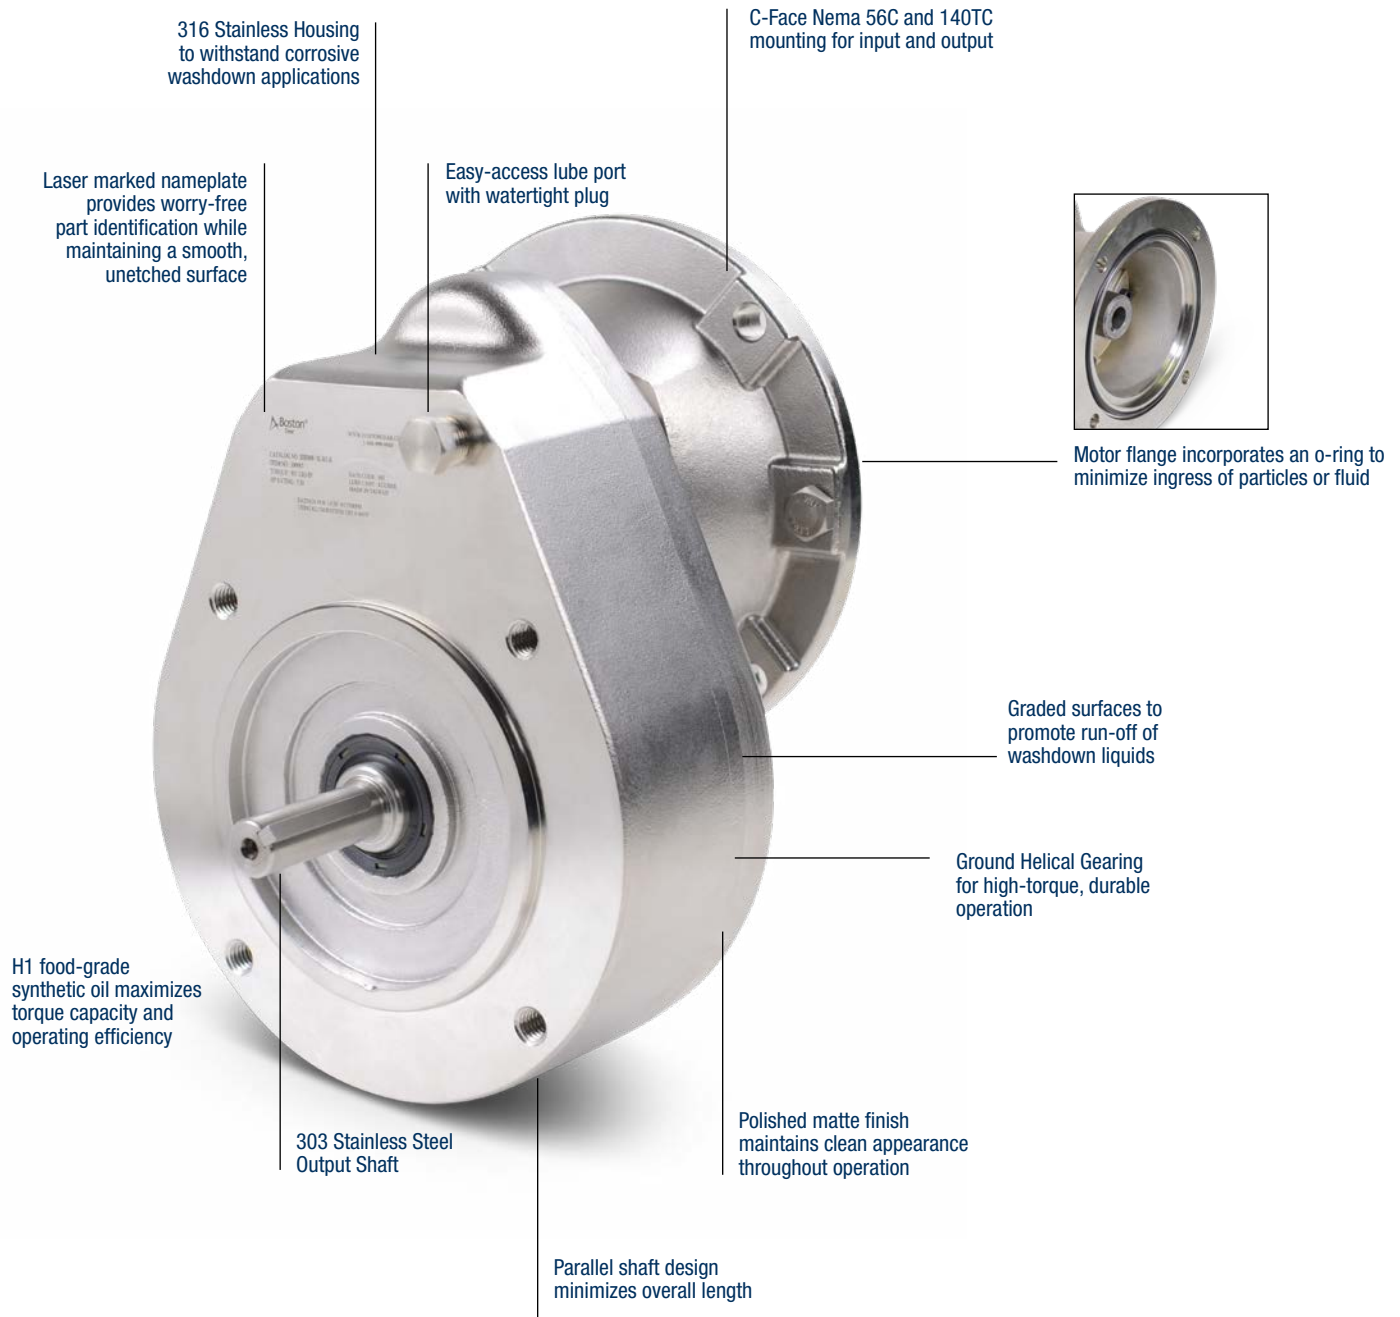

Ordering Information

Stainless Steel Stand-Alone Helical Multiplier

Example: SSHMF2-1.5K-B5-B5

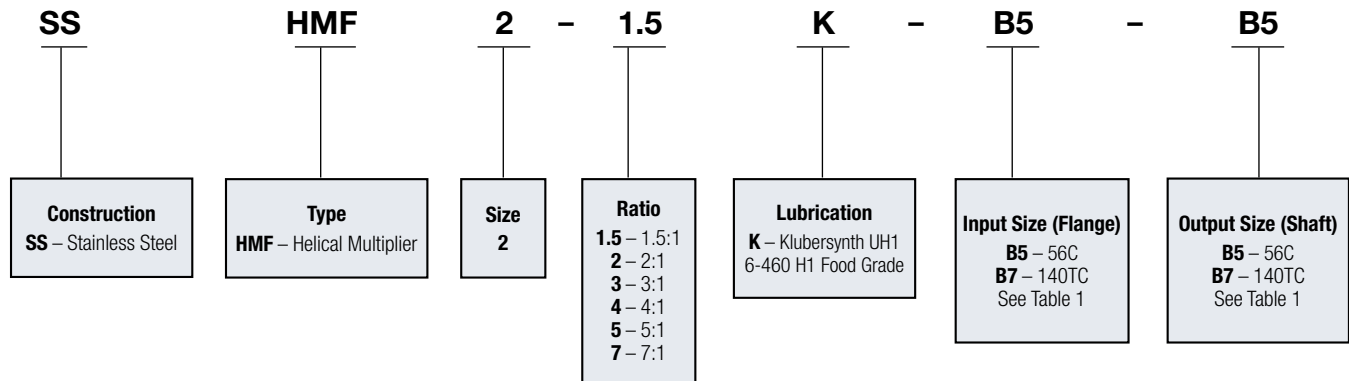


Table 1: Available Ratio-Input-Output Combinations

Ratio	Input	Output
1.5	B5	B5
2	B5	B5
	B7	B7
3	B5	B5
4	B5	B5
5	B5	B5
	B7	B7
7	B5	B5

Lubrication

All SSHMF Helical Multipliers are supplied as Lubricated for Life for maximum efficiency, maintenance-free operation. The small cavity design offers the ideal mix of heat dissipation and lubrication contact in all mounting configurations. Normal full load operating temperatures range between 130°F and 150°F. Recommendations are based on input speed of 1800 RPM nominal. For higher input speeds, consult factory.

RECOMMENDED LUBRICANT	Reducer Designation	ISO Viscosity Grade No.	Viscosity Range SUS @ 100F	Part Number (Quart)	Comments
Klubersynth UH1 6-460 Synthetic	K	460	1950/2500	65159	H1 Food-Grade



Ambient temperature range of -20°F to +125°F is suitable for standard configured products and ratings. Contact technical support for operating conditions beyond this range. Notes: Upper temperature limit is dictated by reducer components and not the oil.

Performance Data

Size	Output RPM	Ratio	Motor HP (1750 RPM Input)	Output		Output Shaft Loading (lbs)		
				HP	Torque (lb.ins)	Thrust	Overhung Load (B5 Output)	Overhung Load (B7 Output)
SSHMF2	1167	1.5	13.60	13.19	712	230	375	750
	875	2	11.76	11.41	822	253	375	750
	583	3	9.48	9.20	944	289	375	750
	438	4	7.27	7.06	914	317	375	750
	350	5	5.06	4.91	884	345	375	750
	250	7	1.55	1.46	365	358	375	750

Ratings shown reflect maximum gear capacity based on AGMA standards (service factor = 1.0) with Klubersynth UH1 6-460. Overhung Load is measured at the centerline of the output shaft projection and ratings are based on no thrust load applied. Ratings based on input speed of 1750 rpm.

Dimensions

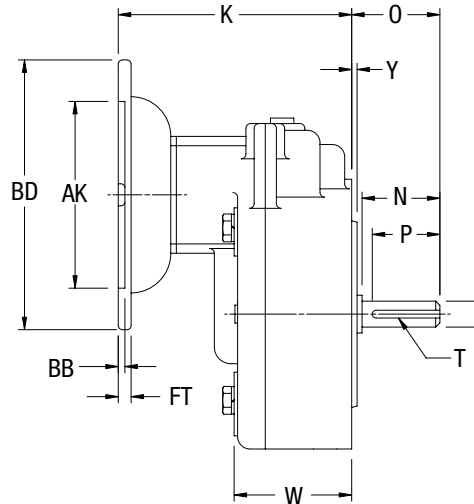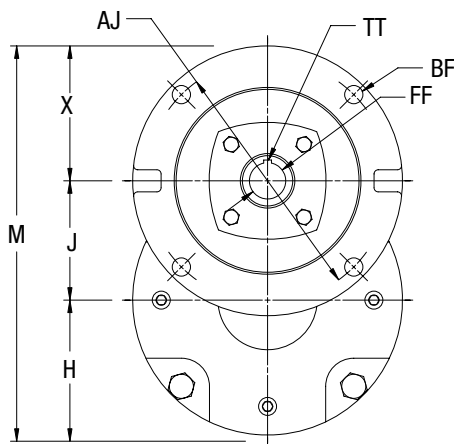


Dimensions in Inches


Size	Output Size (Shaft)	F	H	J	K	M	N	O	P	T	W	X	Y
SSHMF2	B5	0.625	3.37	2.875	5	9.49	1.84	1.9	1.57	3/16X3/32	3	3.25	0.16
	B7	0.875	3.37	2.875	5	9.49	1.84	1.9	1.57	3/16X3/32	3	3.25	0.16

Size	Input Size (Flange)	AJ	AK	BD	BF	BB	FF	FT	TT
SSHMF2	B5	5.875	4.5	6.5	0.41	0.16	0.625	0.43	3/16X3/32
	B7	5.875	4.5	6.5	0.41	0.16	0.875	0.43	3/16X3/32

Expanded Speed Reduction while Maintaining Operating Efficiency

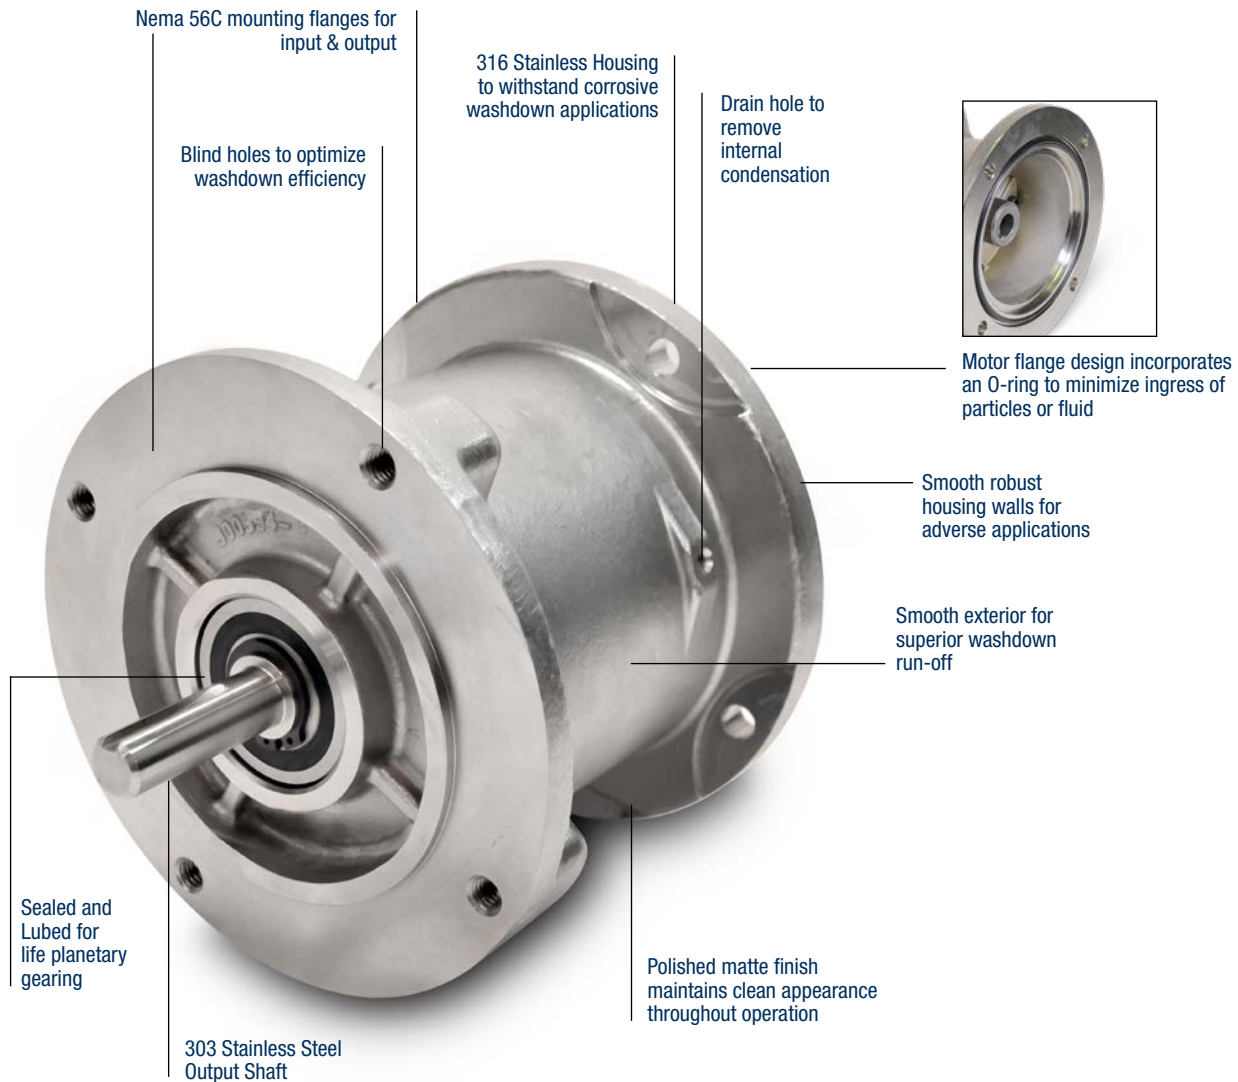


High Efficiency, Quiet Operation Planetary Gearing

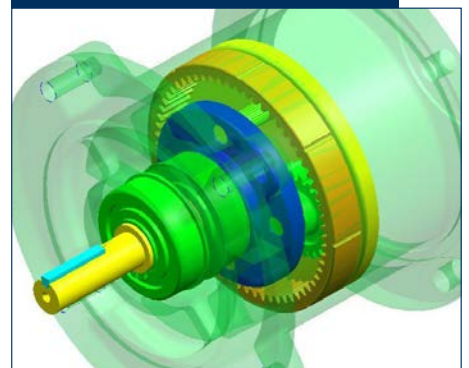

B3 SSFSP Series Planetary Multiplier

Ordering Information

Stainless Steel Stand - Alone Planetary Multiplier **Example: SSFSP-5A**

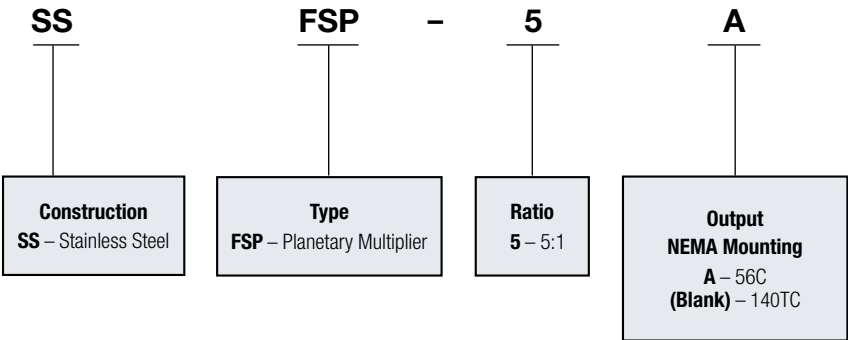

Lubrication

All SSFSP Series Planetary Multipliers are supplied as Lubricated-for-Life for maximum efficiency, maintenance-free operation. The inherent design of planetary gearing is conducive to the use of grease as a lubricant, because the rotation of the sun and planet gears inside of the internal ring gear promotes even distribution of the lubricant and consistent recirculation. The lubricant we apply at the time of assembly is Klubersynth UH1 14-222 grease which has the characteristics shown below.


LUBRICANT	Type	Certifications	Comments
Klubersynth UH1 14-222	Synthetic Grease, NLGI2	FDA 21CFR178.3570 compliant, NSF registered	H1 Food-Grade

Ambient temperature range of -20°F to +125°F is suitable for standard configured products and ratings. Contact technical support for operating conditions beyond this range.
Notes: Temperature limit is dictated by multiplier components and not the lubricant.

Performance Data

Output RPM	Ratio	Motor HP (1750 RPM Input)	Output		Multiplier Catalog Number
			HP	Torque (lb.ins)	
350	5	1/6	.14	25	SSFSP-5 OR SSFSP-5A
		1/4	.21	38	
		1/3	.29	56	
		1/2	.45	81	
		3/4	.69	124	

Dimensions

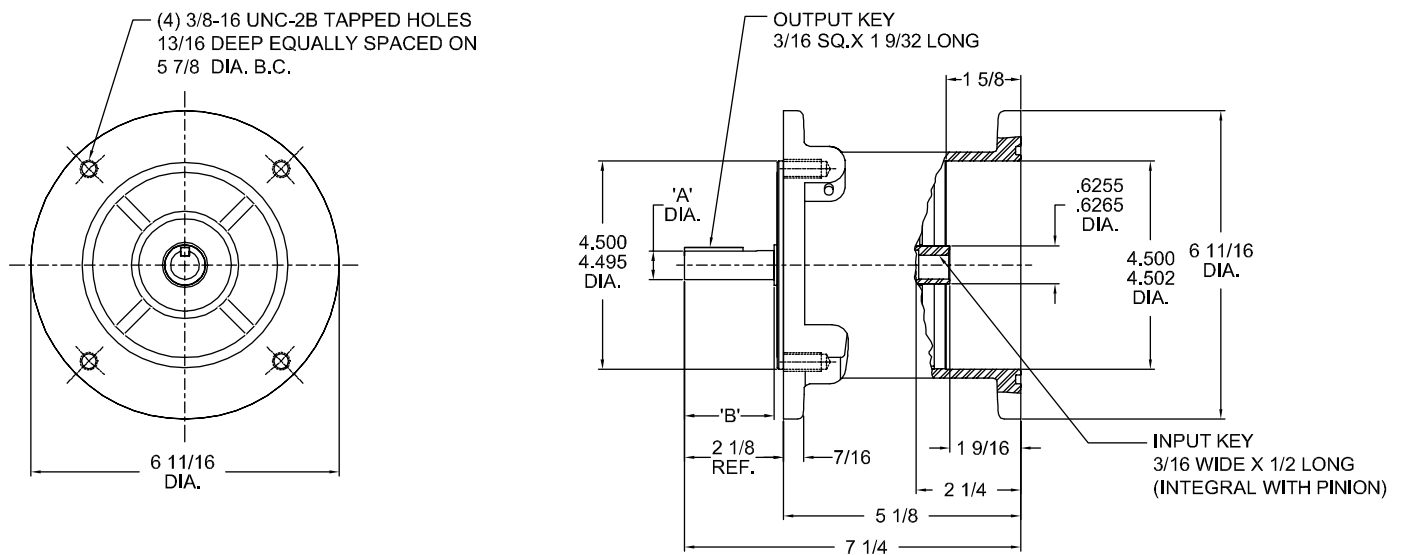

Dimensions in Inches

Catalog Number	A Shaft Dia.	B Shaft Length	Output NEMA Frame Size	Input NEMA Frame Size
SSFSP-5A	.6245 / .6240	1-15/16	56C	56C
SSFSP-5	.8745 / .8740	2	140TC	56C

Micron AquaTRUE™ AQT Series Planetary Gearheads **B4**

High Precision, Low Backlash, Compact-Sized Reduction for Servo Motors

NSF International Certified

IP69K



Laser-marked
nameplate

304 Stainless
Steel Housing

Silicone gasket to
seal Motor-Gearhead
interface

1pc Housing - No
External Seams


Round and
Square Motor
Mounts

Contact lip seal
for maximum
protection

17-4PH Stainless
Steel output shaft
(corrosion resistance
comparable to
304SS)

Tested and Certified for IP66, IP67
and IP69K protection

TRUE Planetary Gearing

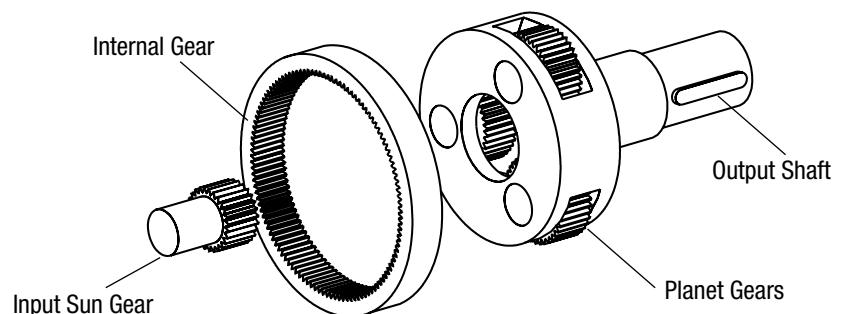


Sizing and Selection

Step 1: Select the required precision class and gearhead configuration (in-line or right angle).

Step 2: Select the proper gearhead using exact or general method.

For continuous duty applications, please contact Applications Engineering.

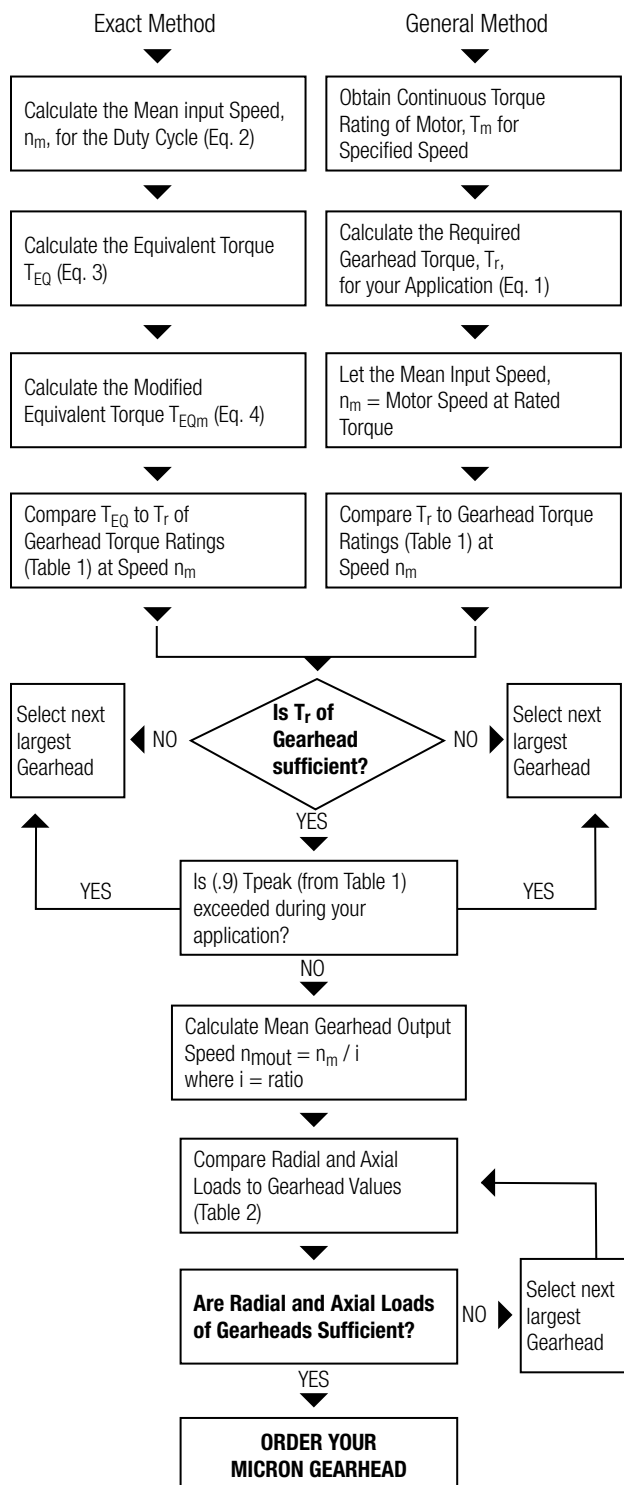

General Method:

Required Gearhead Torque(T_r)

$$(1) T_r = T_M \cdot i \cdot e$$

where:

T_M = continuous torque of motor


i = Gearhead ratio

e = efficiency of Gearhead

* Since many motors are capable of exceeding their continuous torque rating for extended lengths of time, the value for T_M will only provide a starting point for Gearhead selection. Only use the general method if the continuous motor rating is not exceeded in the application.

Exact Method

Motion Profile

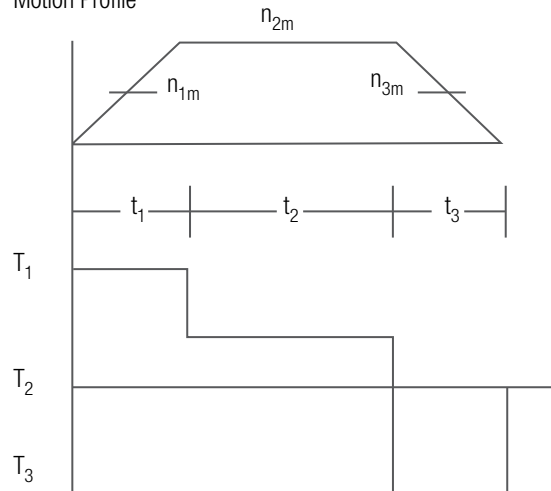

t_n = time period n

n_{nm} = mean speed during time period t_n

T_n = torque during time period t_n

Mean input speed (n_m)

$$(2) n_m = \frac{n_{1m}t_1 + n_{2m}t_2 + n_{3m}t_3 + \dots + n_{nm}t_n}{t_t}$$

where $t_t = t_1 + t_2 + t_3 + \dots + t_n$

Equivalent torque (T_{EQ})

$$(3) T_{EQ} = \sqrt[8.7]{T_1^{8.7} \frac{n_{1m}t_1}{n_m t_t} + T_2^{8.7} \frac{n_{2m}t_2}{n_m t_t} + T_3^{8.7} \frac{n_{3m}t_3}{n_m t_t} + \dots + T_n^{8.7} \frac{n_{nm}t_n}{n_m t_t}}$$

Modified equivalent torque (T_{EQm})

$$(4) T_{EQm} = (T_{EQ})/Q$$

where Q is:


Q	# of cycles/hr
1,0	>0
0,9	>1000
0,7	>2500
0,5	>5000

For applications > 10,000 cycles/hour or for continuous duty operation, please contact application engineering.

Ordering Information

Stainless Steel True Planetary Gearhead

Example: AQT060-010-0-MMR725

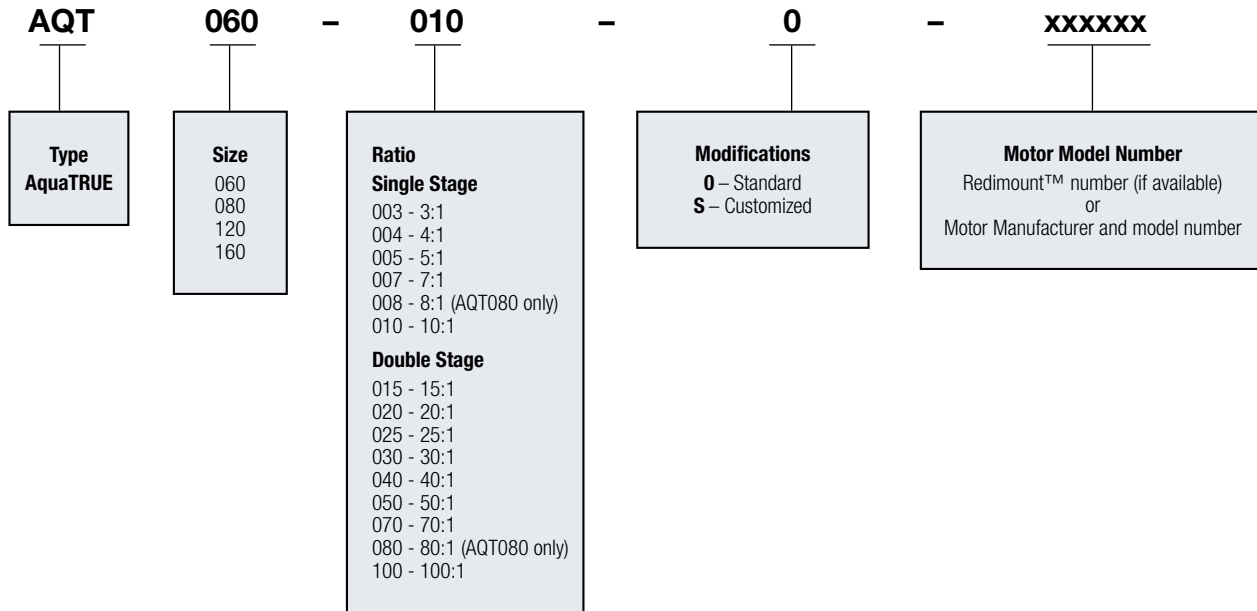

Modifications

Micron offers many different customization options to allow customers to meet the unique challenges of their applications.

Simple modifications that usually have little or no impact to price and lead time

- Output shaft modifications (shorter length or smaller diameter)
- Output shaft modifications (longer length or larger diameter would be product dependent)
- Custom output shaft designs (spline shafts, tapped holes)
- Higher precision options
- New ratio combinations (three stage designs, new ratios)
- Custom greases (food grade, low temperature, vacuum prep)
- Stainless steel, nickel plating or paint options

Other modifications that may require volume or longer lead time

- Envelope-size reductions (shorter length or width)
- Machined and mounted output gears
- Heavy shock and vibration requirements
- White paper, ground-up designs

Performance Specifications

Part Number		Ratio	20,000 Hour Life				T Peak Nm [in.-lb.]	J kg-cm2 [in.-lb. sec2*10-4]	Torsional Stiffness Nm/arc-min [in.-lb./arc-min]	
			Tr (1000 rpm) Nm [in.-lb.]	Tr (2000 rpm) Nm [in.-lb.]	Tr (3000 rpm) Nm [in.-lb.]	Tr (4000 rpm) Nm [in.-lb.]				
AQT060	AQT060-003	3:1	16 [139]	13 [112]	12 [102]	11 [93]	55 [483]	0.572 [5.066]	1.49 [13.17]	
	AQT060-004	4:1	20 [177]	17 [149]	15 [130]	14 [121]	46 [409]	0.457 [4.047]	1.47 [12.97]	
	AQT060-005	5:1	18 [158]	15 [130]	13 [112]	12 [102]	48 [427]	0.408 [3.615]	1.45 [12.79]	
	AQT060-007	7:1	17 [149]	14 [121]	12 [102]	11 [93]	43 [381]	0.367 [3.245]	1.40 [12.41]	
	AQT060-010	10:1	16 [139]	15 [130]	14 [121]	13 [112]	47 [418]	0.347 [3.068]	1.36 [12.07]	
	AQT060-015	15:1	26 [232]	21 [186]	19 [167]	17 [149]	55 [483]	0.387 [3.424]	1.49 [13.14]	
	AQT060-020	20:1	27 [242]	25 [223]	22 [195]	21 [186]	48 [427]	0.385 [3.408]	1.47 [13.00]	
	AQT060-025	25:1	25 [223]	23 [204]	20 [177]	19 [167]	55 [483]	0.384 [3.400]	1.45 [12.85]	
	AQT060-030	30:1	29 [260]	26 [232]	23 [204]	21 [186]	55 [483]	0.340 [3.006]	1.49 [13.18]	
	AQT060-040	40:1	28 [251]	27 [242]	27 [242]	25 [223]	48 [427]	0.339 [3.002]	1.47 [13.04]	
AQT060-050	50:1	26 [232]	25 [223]	25 [223]	23 [204]	55 [483]	0.339 [3.001]	1.46 [12.88]		
	AQT060-070	70:1	25 [223]	24 [214]	24 [214]	22 [195]	48 [427]	0.339 [2.999]	1.38 [12.23]	
	AQT060-100	100:1	21 [186]	20 [177]	19 [167]	18 [158]	43 [381]	0.339 [2.998]	1.29 [11.41]	
	AQT080	AQT080-003	3:1	59 [520]	48 [427]	43 [381]	39 [344]	165 [1459]	2.433 [21.5]	6.21 [54.96]
		AQT080-004	4:1	70 [623]	58 [511]	53 [465]	48 [427]	165 [1459]	1.929 [17.1]	6.19 [54.81]
		AQT080-005	5:1	65 [576]	53 [465]	47 [418]	43 [381]	165 [1459]	1.692 [15.0]	6.12 [54.18]
		AQT080-007	7:1	63 [558]	50 [446]	45 [400]	40 [353]	165 [1459]	1.472 [13.0]	5.70 [50.41]
		AQT080-008	8:1	62 [549]	49 [434]	45 [398]	42 [372]	165 [1460]	1.426 [12.6]	5.53 [48.98]
		AQT080-010	10:1	54 [474]	48 [427]	45 [400]	43 [381]	165 [1459]	1.387 [12.3]	5.83 [51.62]
		AQT080-015	15:1	90 [799]	78 [688]	69 [613]	63 [558]	175 [1552]	1.605 [14.2]	6.18 [54.70]
AQT080-020		20:1	92 [818]	88 [781]	81 [716]	75 [660]	175 [1552]	1.598 [14.1]	6.18 [54.67]	
AQT080-025		25:1	87 [771]	83 [734]	76 [669]	69 [613]	175 [1552]	1.594 [14.1]	6.11 [54.10]	
AQT080-030		30:1	100 [883]	90 [799]	85 [753]	78 [688]	175 [1552]	1.367 [12.1]	6.18 [54.68]	
AQT080-040	40:1	96 [846]	92 [818]	90 [799]	88 [781]	175 [1552]	1.365 [12.1]	6.18 [54.67]		
	AQT080-050	50:1	90 [799]	87 [771]	85 [753]	83 [734]	175 [1552]	1.364 [12.1]	6.11 [54.10]	
	AQT080-070	70:1	88 [781]	85 [753]	83 [734]	82 [725]	175 [1552]	1.363 [12.1]	5.37 [48.28]	
	AQT080-080	80:1	84 [743]	80 [708]	78 [690]	74 [655]	175 [1549]	1.363 [12.1]	5.33 [47.21]	
	AQT080-100	100:1	72 [641]	67 [595]	63 [558]	61 [539]	175 [1552]	1.363 [12.1]	5.58 [49.34]	
	AQT120	AQT120-003	3:1	90 [799]	74 [650]	65 [576]	59 [520]	298 [2639]	9.014 [79.8]	13.58 [120.15]
		AQT120-004	4:1	107 [948]	89 [790]	79 [697]	74 [650]	298 [2639]	7.286 [64.5]	13.49 [119.36]
		AQT120-005	5:1	99 [873]	81 [716]	71 [632]	65 [576]	298 [2639]	6.484 [57.4]	13.37 [118.32]
		AQT120-007	7:1	97 [855]	79 [697]	68 [604]	63 [558]	298 [2639]	5.746 [50.9]	12.96 [114.65]
		AQT120-010	10:1	87 [771]	79 [697]	74 [650]	69 [613]	298 [2639]	5.376 [47.6]	12.12 [107.27]
AQT120-015		15:1	146 [1292]	119 [1050]	105 [929]	96 [846]	298 [2639]	6.161 [54.5]	13.40 [118.60]	
AQT120-020		20:1	169 [1496]	139 [1227]	124 [1097]	114 [1013]	298 [2639]	6.137 [54.3]	13.32 [117.90]	
AQT120-025		25:1	161 [1422]	130 [1152]	116 [1022]	106 [939]	298 [2639]	6.199 [54.9]	13.38 [118.36]	
AQT120-030		30:1	180 [1589]	146 [1292]	129 [1143]	119 [1050]	298 [2639]	5.298 [46.9]	13.39 [115.53]	
AQT120-040		40:1	187 [1654]	169 [1496]	150 [1329]	139 [1227]	298 [2639]	5.292 [46.8]	13.47 [119.22]	
AQT120-050	50:1	179 [1580]	161 [1422]	142 [1254]	130 [1152]	298 [2639]	5.289 [46.8]	13.40 [118.57]		
	AQT120-070	70:1	176 [1561]	159 [1403]	140 [1236]	128 [1134]	298 [2639]	5.274 [46.7]	13.00 [115.05]	
	AQT120-100	100:1	120 [1059]	109 [966]	104 [920]	100 [883]	298 [2639]	5.281 [46.7]	12.22 [108.18]	
	AQT160	AQT160-003	3:1	317 [2806]	257 [2277]	228 [2016]	209 [1849]	876 [7750]	36.396 [322.13]	46.71 [413.39]
		AQT160-004	4:1	371 [3280]	305 [2695]	272 [2407]	251 [2221]	876 [7750]	26.642 [235.80]	46.16 [408.73]
		AQT160-005	5:1	350 [3094]	284 [2509]	251 [2221]	230 [2035]	876 [7750]	22.246 [196.89]	45.43 [402.08]
		AQT160-007	7:1	344 [3048]	278 [2463]	246 [2174]	225 [1989]	876 [7750]	18.551 [164.19]	43.44 [384.46]
		AQT160-010	10:1	222 [1961]	198 [1756]	185 [1635]	175 [1552]	876 [7750]	16.606 [146.97]	40.98 [362.68]
		AQT160-015	15:1	508 [4498]	417 [3689]	370 [3271]	339 [3001]	876 [7750]	19.892 [176.06]	45.19 [399.89]
		AQT160-020	20:1	513 [4544]	481 [4256]	428 [3791]	395 [3494]	876 [7750]	19.721 [174.55]	46.39 [410.38]
AQT160-025		25:1	492 [4358]	460 [4070]	407 [3605]	374 [3308]	876 [7750]	19.632 [173.75]	45.62 [403.72]	
AQT160-030		30:1	562 [4971]	508 [4498]	455 [4024]	417 [3689]	876 [7750]	15.971 [141.36]	46.82 [413.83]	
AQT160-040		40:1	536 [4739]	513 [4544]	500 [4423]	481 [4256]	876 [7750]	15.971 [141.36]	46.37 [410.36]	
AQT160-050	50:1	515 [4553]	492 [4358]	479 [4237]	460 [4070]	876 [7750]	15.971 [141.35]	45.60 [403.59]		
	AQT160-070	70:1	509 [4507]	487 [4312]	474 [4191]	455 [4024]	876 [7750]	15.952 [141.18]	45.53 [385.27]	
	AQT160-100	100:1	306 [2704]	279 [2472]	265 [2342]	254 [2249]	876 [7750]	15.941 [141.09]	40.95 [362.45]	

Tr = Rated output torque at rated speed for specific hours of life.

Specifications subject to change without notice.



T_{peak} = Allowable momentary peak torque for emergency stop or heavy shock loading.

J = Mass moment of inertia reflected to the input shaft (including pinion assembly).

Performance Specifications



Radial and Axial Load Ratings

AQT060

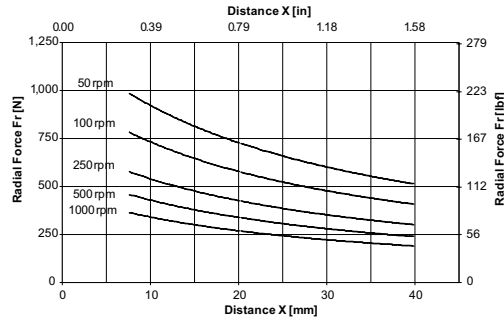



Speed rpm	Axial Load, F_a N [lb.]
50	2542 [571]
100	2017 [454]
250	1486 [334]
500	1180 [265]
1000	936 [211]

AQT080

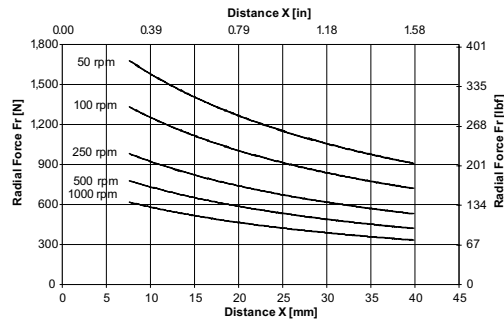



Speed rpm	Axial Load, F_a N [lb.]
50	3780 [850]
100	3000 [675]
250	2211 [497]
500	1755 [394]
1000	1393 [313]

AQT120

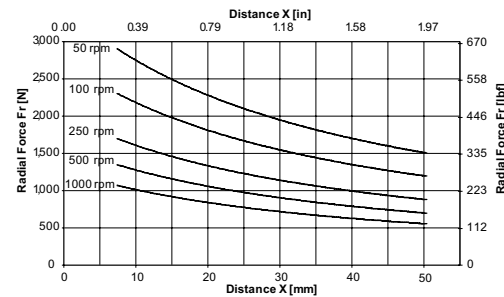

Speed rpm	Axial Load, F_a N [lb.]
50	6894 [1550]
100	5471 [1230]
250	4034 [907]
500	3203 [720]
1000	2540 [571]

AQT160

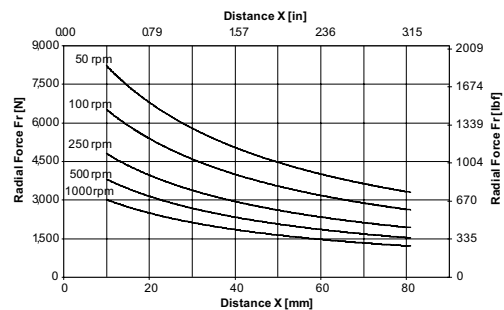


Speed rpm	Axial Load, F_a N [lb.]
50	14,122 [3175]
100	11,209 [2520]
250	8260 [1857]
500	6556 [1474]
1000	5204 [1170]

These graphs display the allowable radial load at a given distance (X) from the mounting surface based on an L_{10} life of 20,000 hours for the mean output speed.

B4 Micron AquaTRUE™ AQT Series Planetary Gearheads

Dimensions

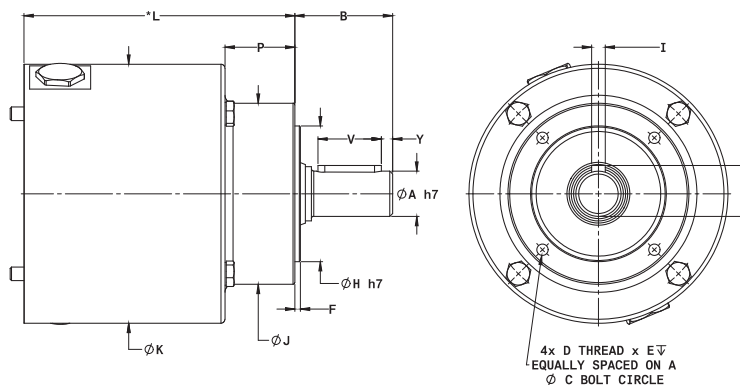

* 'L' Dimension will change depending on motor being used.

Note: Mounting adapters available for both round and square motors.

Dimensions

Part Number	A Output Shaft Diameter mm [in.]	B Output Shaft Length mm [in.]	Y Shaft End Distance mm [in.]	V Keyway Length mm [in.]	R Keyway Height mm [in.]	I Key Width mm [in.]	H Pilot Diameter mm [in.]	J Body Diameter mm [in.]
AQT060	14 [0.55]	36.8 [1.45]	2.5 [0.10]	25 [0.98]	16 [0.63]	5 [0.20]	43 [1.69]	60 [2.36]
AQT080	20 [0.79]	43.2 [1.70]	4.0 [0.16]	28 [1.10]	22.5 [0.89]	6 [0.24]	60 [2.36]	80 [3.15]
AQT120	25 [0.98]	58.4 [2.30]	5 [0.20]	40 [1.57]	28 [1.10]	8 [0.31]	80 [3.15]	110.5 [4.36]
AQT160	40 [1.57]	90.3 [3.56]	8.0 [0.32]	65 [2.55]	43 [1.69]	12 [0.47]	105 [4.13]	140 [5.50]

Part Number	F Pilot Length mm [in.]	D Output Housing Thread	E Thread Depth mm [in.]	K Input Body Diameter mm [in.]	* L Standard Length mm [in.]		C Bolt Circle [in.]	P Output Body Length mm [in.]
					ratio 3:1 - 10:1	ratio 15:1 - 100:1		
AQT060	2.5 [0.098]	M5x0.8-6H	8.1 [0.32]	92 [3.62]	91.7 [3.61]	109 [4.29]	52 [2.05]	38.5 [1.51]
AQT080	2.5 [0.098]	M6x1.0-6H	10.1 [0.40]	114.5 [4.51]	119.7 [4.71]	142.7 [5.62]	70 [2.76]	30.8 [1.21]
AQT120	4.0 [0.157]	M10x1.5-6H	16 [0.63]	150 [5.9]	148.2 [5.83]	179.3 [7.06]	95 [3.74]	56.1 [2.21]
AQT160	5.0 [0.197]	M12x1.75-6H	21.6 [0.85]	188.7 [7.43]	195.8 [7.71]	243.8 [9.60]	124 [4.88]	76 [2.99]

Specifications

Part Number	Stages	Backlash (arc-min)	Efficiency	Weight		Ratio Availability
				kg	[lbs.]	
AQT060	1	13	93%	2.4	[5.4]	3:1, 4:1, 5:1, 7:1; 10:1
	2	15	88%	3.3	[7.3]	15:1, 20:1, 25:1, 30:1, 40:1, 50:1; 70:1; 100:1
AQT080	1	13	93%	5.7	[12.7]	3:1, 4:1, 5:1, 7:1; 8:1; 10:1
	2	15	88%	7.2	[15.9]	15:1, 20:1, 25:1, 30:1, 40:1, 50:1; 70:1; 80:1; 100:1
AQT120	1	13	93%	12.0	[26.5]	3:1, 4:1, 5:1, 7:1; 10:1
	2	15	88%	15.4	[33.9]	15:1, 20:1, 25:1, 30:1, 40:1, 50:1; 70:1; 100:1
AQT160	1	13	93%	24.8	[53.8]	3:1, 4:1, 5:1, 7:1; 10:1
	2	15	88%	31.2	[68.8]	15:1, 20:1, 25:1, 30:1, 40:1, 50:1; 70:1; 100:1

T_r = Rated output torque at rated speed for specific hours of life.

T_{peak} = Allowable momentary peak torque for emergency stop or heavy shock loading.


J = Mass moment of inertia reflected to the input shaft (including pinion assembly).

Specifications subject to change without notice.

Installation

Mounting Instructions

1. Slide the provided sleeve into the hub and align the slot in the bushing with the slot in the hub.
2. Set the motor on a work surface or hold fixture with the output shaft facing straight up. If there is a key on the motor, remove it and align the keyway with the slot in the hub. Slide the gearhead down onto the motor shaft.
3. Rotate the hub to align the input housing access holes with the hub clamping bolts.
4. Using a torque wrench, tighten the hub bolts to the pre-torque value indicated in the table.
5. Bolt the motor to the gearhead with the bolts provided.
6. Gradually tighten the hub bolts in three steps, increasing the torque each time until reaching the final tightening torque in the table.
7. Incorrectly mounted motor and gearbox void the warranty

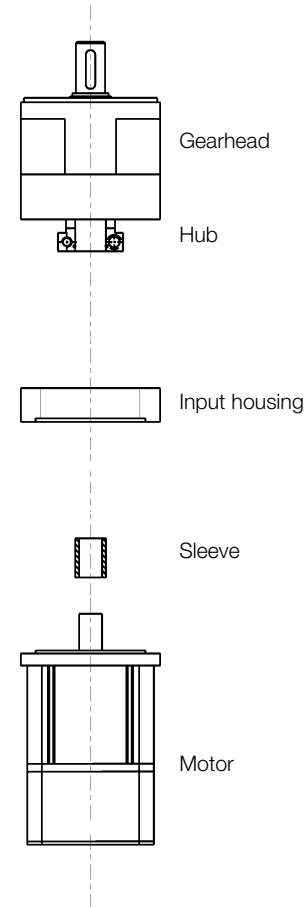

Hub Bolt Tightening Torques

Gearhead Model	Gearhead Frame Size	Pre-Tightening Torque		Final Tightening Torque	
		in.-lb.	[Nm]	in.-lb.	[Nm]
AquaTRUE™	060	2	0.2	39	4.4
	080	4	0.4	76	8.5
	120	16	1.8	316	36
	160	32	3.6	636	72

Gearhead must be mounted in vertical orientation.

Lubrication

All AQT Series Planetary Gearheads are supplied as Lubricated-for-Life for maximum efficiency, maintenance-free operation. The inherent design of planetary gearing is conducive to the use of grease as a lubricant, because the rotation of the sun and planet gears inside of the internal ring gear promotes even distribution of the lubricant and consistent recirculation. The lubricant we apply at the time of assembly is Lubriplate FGL-1 grease which has the characteristics shown below.

LUBRICANT	Type	Operating Temperature Range	Certifications	Comments
Klubersynth FGL-1	Mineral-base, NLGI Grade 1	0 to 360°F	NSF International H-1 Registered	H1 Food-Grade



Notes: Temperature limit is dictated by multiplier components and not the lubricant.

SS Hiflex Helical Bevel Gear Motors

C

Fully-integrated, non-ventilated, highly efficient Gear Motor

IP67/
IP69K

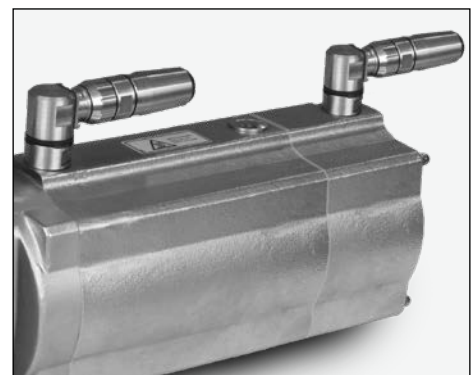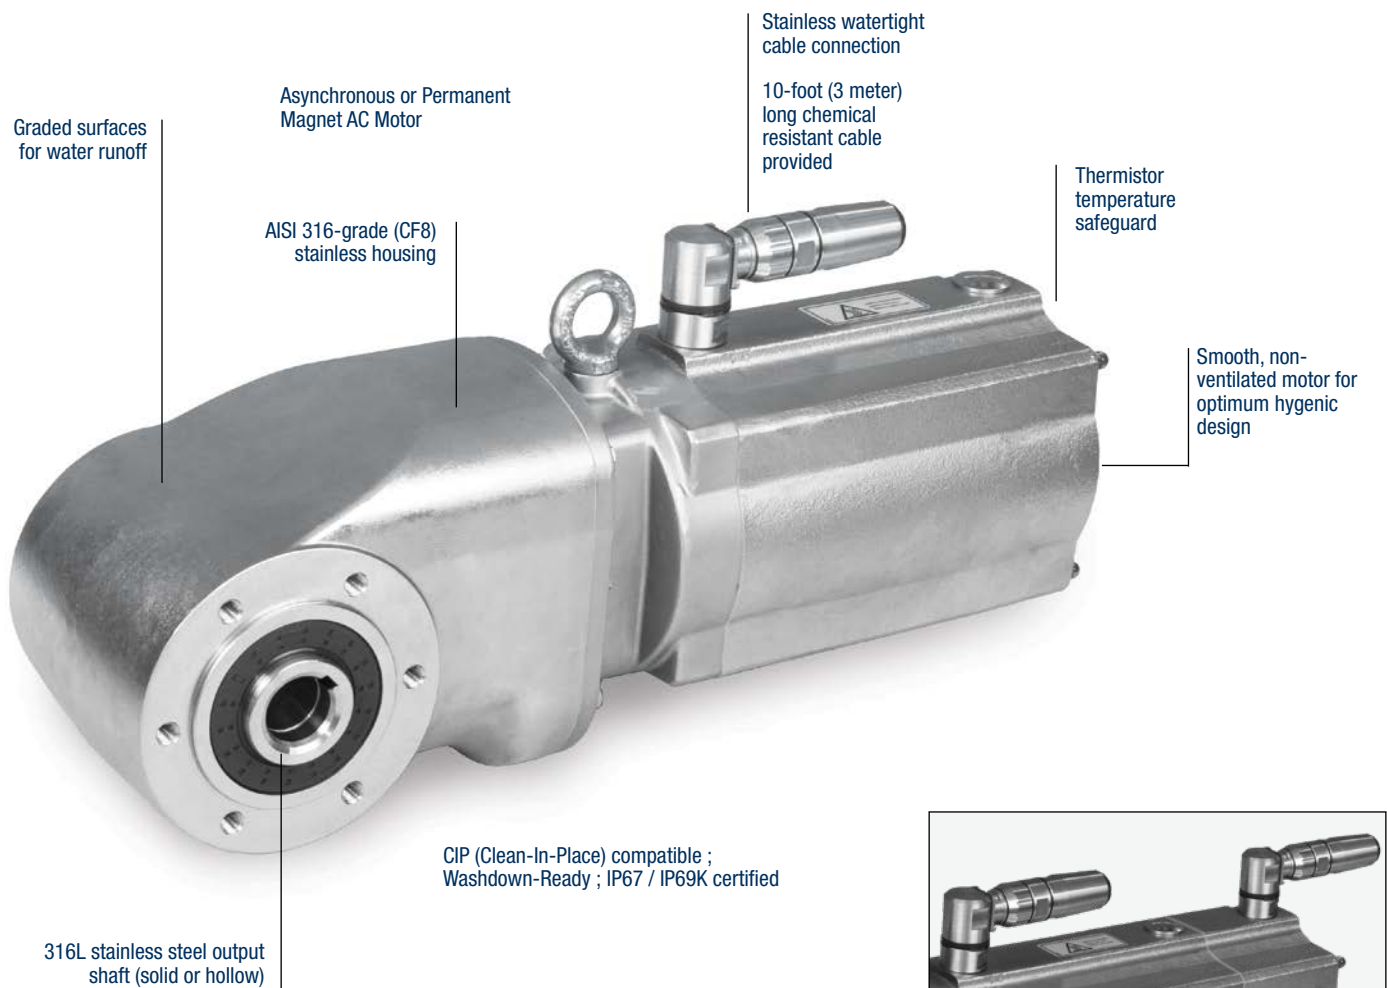

Fully encapsulated brakes or encoders are available upon request

Sizing and Selection

1. Identify Output RPM, Output Torque and Duty Cycle required for application.
2. Identify any application constraints.
3. Use Performance charts (p.61-62) to select Model # that meets Output RPM, Output Torque and Duty Cycle
4. Build full part number (p.60) with mounting and feature preferences.
5. Use Specification tables (p.60) to identify electrical requirements for operation.
6. Ensure available envelope with Dimensions table (p.64).



Ordering Information

GEARING OPTIONS				MOTOR OPTIONS				SHAFT OPTIONS				
<u>BK</u>	<u>08</u>	-	<u>7</u>	<u>4</u>	/	<u>DAPE09XA4</u>	-	<u>TF</u>	/	<u>AV</u>	/	<u>VA</u>
Type	Size	Mounting		Shaft Style		Type (see Chart 1)	Feature		Shaft Options		Stainless Exterior	
BK - Helical Bevel	04	7 - Shaft mount machined face		1 - Solid		DAPE08YA4-2	Blank - none		AV - Inch			
	4 - Hollow			DAPE09XA4	TF (thermistors)		AM - Metric					
	08											
	17					DA09XA4						
						SA5E08MA4						
						SA5E09SA4						
						SA5E09XA4						
						SA09XA4						

Customer must provide selected OUTPUT RPM from Selection Table on pages 61-62, along with SUPPLY VOLTAGE at time of order.

Customer must provide selected OUTPUT RPM from Selection Table on pages 61-62, along with SUPPLY VOLTAGE at time of order.

Part Number Examples:

BK04-74/DAPE08YA4-2/AV/VA

BK17-71/SA5E09SA4-TF/AV/VA

Gearbox Specifications

Model	Torque Rating (lbf-in)	Solid Shaft Sizes	
		Inch AV Option	Metric AM Option
BK04-71 (Solid)	700	1"	25mm
BK08-71 (Solid)	1770	1.25"	30mm
BK17-71 (Solid)	2920	1.375"	35mm

Model	Torque Rating (lbf-in)	Hollow Bore Sizes	
		Inch AV Option	Metric AM Option
BK04-74 (Hollow)	700	0.75"	20mm
BK08-74 (Hollow)	1770	1.375"	35mm*
BK17-74 (Hollow)	2920	1.50"	40mm*

* Indicates max value shown

Chart 1

Motor Type	Gearing Size			Description
	BK04	BK08	BK17	
DAPE08YA4-2	X	X		ASM Asynchronous
DAPE09XA4		X	X	ASM Asynchronous
DA09XA4		X	X	ASM Asynchronous
SA5E08MA4	X	X		PMSM Permanent Magnet
SA5E09SA4		X	X	PMSM Permanent Magnet
SA5E09XA4		X	X	PMSM Permanent Magnet
SA09XA4		X	X	PMSM Permanent Magnet

Motor Specifications

Type	Voltage	Nominal Motor Speed	Frequency	Enclosure	Turndown (for short durations)
ASM Asynchronous	230V or 460V**	1800rpm	50/60Hz	TENV	up to 20:1
PMSM Permanent Magnet*	460V** (230-500V)	1800rpm (0-3600rpm)	50/60Hz (0 - 120Hz)	TENV	full torque at virtually zero speed



* Requires use of VFD Variable Frequency Drive suitable for use with Permanent Magnet Motors.

** Contact factory for voltages not shown

Important Ordering Comments:

- Additional Output Shaft options are also available (contact factory for more info)
- Additional Motor Options (contact factory for more info): Brakes; encoders; special voltages; Non-std cable exits; variable cable lengths
- Supplied with H1 food grade synthetic oil
- Unless advised, Right-Angle Gearmotors are specified for standard H1 mounting position (see table below)

Right-Angle Mounting Positions

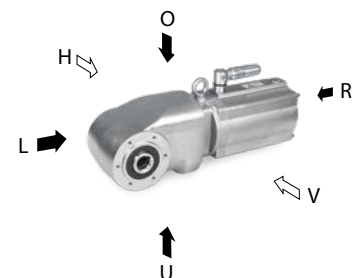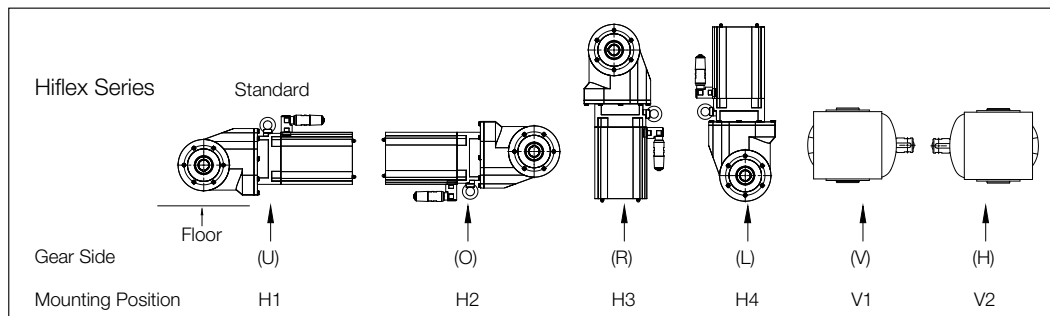

Ratios and Performance: ASM Asynchronous Motor Selection Tables

0.5HP

S1 Continuous Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	73	BK08 / DAPE08YA4-2
290	6.02	99	
240	7.25	119	BK04 / DAPE08YA4-2
180	9.71	159	
150	11.67	190	
114	15.29	248	
97	18.00	288	
81	21.54	345	
67	26.36	416	
53	33.33	531	
46	38.18	611	
36.5	47.78	761	
36	48.96	770	BK08 / DAPE08YA4-2
28.5	61.68	974	
24.5	72.31	1115	
20	89.30	1389	

0.75HP

S1 Continuous Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	108	BK08 / DAPE09XA4
290	6.02	146	
230	7.68	186	
186	9.40	226	
164	10.70	257	
147	11.93	292	
121	14.50	345	
104	16.92	403	
95	18.52	443	
78	22.65	540	
61	28.76	681	
51	34.25	814	
43	40.79	965	
36	48.96	1142	
28.5	61.68	1451	
24.5	72.31	1664	
23	76.79	1770	BK17 / DAPE09XA4
20	88.12	1991	
16.5	108.60	2390	

1.0HP

S3 60% - Intermittent Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	148	BK08 / DA09XA4
290	6.02	201	
230	7.68	256	
186	9.40	314	
164	10.70	349	
147	11.93	398	
121	14.50	474	
104	16.92	553	
95	18.52	605	
78	22.65	740	
61	28.76	939	
51	34.25	1118	
43	40.79	1332	
36	48.96	1581	
34.5	51.22	1654	BK17 / DA09XA4
29	61.30	1980	
23	76.79	2452	
20	88.12	2782	
16.5	108.60	3389	

1.5HP

S3 40% - Intermittent Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	199	BK08 / DA09XA4
290	6.02	270	
230	7.68	344	
186	9.40	421	
164	10.70	217	
147	11.93	534	
121	14.50	635	
104	16.92	741	
95	18.52	811	
78	22.65	992	
61	28.76	1260	
51	34.25	1500	BK17 / DA09XA4
43	40.79	1787	
41	42.70	1871	
34.5	51.22	2219	
29	61.30	2656	
23	76.79	3289	

2.0HP

S3 20% - Intermittent Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	296	BK08 / DA09XA4
290	6.02	402	
230	7.68	513	
186	9.40	628	
164	10.70	699	
147	11.93	796	
121	14.50	947	
104	16.92	1105	
95	18.52	1210	
78	22.65	1479	BK17 / DA09XA4
73	24.29	1586	
62	28.66	1872	
48	36.69	2396	
41	42.70	2789	
34.5	51.22	3308	

Above tables based on 60Hz supply and ambient temperature of up to 40°C (104°F).

Ratings are thermally limited based on the duty cycle noted in accordance with EN 60034-1.

All continuous duty rated gearmotors have an efficiency rating of IE3

Intermittent duty defines the percentage of time over a 10 minute cycle that the gearmotor can be operating at full rated torque with the remainder of the cycle at dwell.

For operating conditions not listed above, please contact the factory.

Service factor > 1.0 for all values except those in italics font.

Ratios and Performance: PMSM Permanent Magnet Motor Selection Tables

0.5HP

S1 Continuous Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	87	BK08 / SA5E08MA4
290	6.02	117	
240	7.25	142	
180	9.71	186	BK04 / SA5E08MA4
150	11.67	226	
114	15.29	292	
97	18.00	341	
81	21.54	412	
67	26.36	496	
53	33.33	628	
46	38.18	726	
36.5	47.78	903	
36	48.96	920	
28.5	61.68	1159	BK08 / SA5E08MA4
24.5	72.31	1345	
20	89.30	1646	

0.75HP

S1 Continuous Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	126	BK08 / SA5E08MA4
290	6.02	171	
240	7.25	204	
180	9.71	274	BK04 / SA5E08MA4
150	11.67	332	
114	15.29	429	
97	18.00	496	
81	21.54	593	
67	26.36	735	
61	28.76	797	
51	34.25	947	
43	40.79	1133	
36	48.96	1345	
28.5	61.68	1699	BK08 / SA5E08MA4
23	76.79	2080	
20	88.12	2345	
16.5	108.60	2876	BK17 / SA5E09SA4

1.0HP

S1 Continuous Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	173	BK08 / SA5E09SA4
290	6.02	235	
230	7.68	296	
186	9.40	367	
164	10.70	407	
147	11.93	460	
121	14.50	549	
104	16.92	646	
95	18.52	708	
78	22.65	858	
61	28.76	1097	
51	34.25	1301	
43	40.79	1558	
41	42.70	1628	
34.5	51.22	1903	
29	61.30	2301	
23	76.79	2832	
20	88.12	3230	BK17 / SA5E09SA4
16.5	108.60	3938	

1.5HP

S1 Continuous Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	252	BK08 / SA5E09XA4
290	6.02	341	
230	7.68	434	
186	9.40	531	
164	10.70	593	
147	11.93	673	
121	14.50	805	
104	16.92	938	
95	18.52	1027	
78	22.65	1257	
61	28.76	1602	BK17 / SA5E09XA4
48	36.69	2036	
41	42.70	2345	
34.5	51.22	2788	
29	61.30	3363	
23	76.79	4160	

2.0HP

S3 60% - Intermittent Duty

Output RPM	Ratio	Output Torque (in-lbs)	Model
395	4.44	345	BK08 / SA09XA4
290	6.02	468	
230	7.68	597	
186	9.40	731	
164	10.70	814	
147	11.93	928	
121	14.50	1103	
104	16.92	1287	
95	18.52	1409	
78	22.65	1723	
73	24.29	1848	BK17 / SA09XA4
62	28.66	2180	
48	36.69	2791	
41	42.70	3248	
34.5	51.22	3853	

(Requires use of VFD Variable Frequency Drive suitable for use with Permanent Magnet Motors)

Above tables based on 60Hz supply and ambient temperature of up to 40°C (104°F).

Ratings are thermally limited based on the duty cycle noted in accordance with EN 60034-2.

All continuous duty rated gearmotors have an efficiency rating of IE5.

Intermittent duty defines the percentage of time over a 10 minute cycle that the gearmotor can be operating at full rated torque with the remainder of the cycle at dwell.

For operating conditions not listed above, please contact the factory.

Service factor > 1.0 for all values except those in italics font.

Contact the factory for recommendations of VFD Variable Frequency Drives suitable for use with permanent magnet motors.


Motor Options

Sustainable Performance Motor Design


- Smooth motor housing and graded surfaces promote water runoff and easy cleaning.
- Non-ventilated motor avoids contaminant dispersion common to fan-cooled models.
- ASM Asynchronous motor offer simple install and start-up for a wide range of applications, providing reliable, high efficiency operation.
- PMSM Permanent Magnet motors offer savings of up to 40% on energy consumption based on variation of loading common in many applications when utilized with a VFD. By using its turndown capability, the PMSM motor allows the user to consolidate a wide range of ratios into one stocked gearmotor and maintain high efficiency across the expanded RPM range.



Efficiency ASM; 1.5HP; IE3

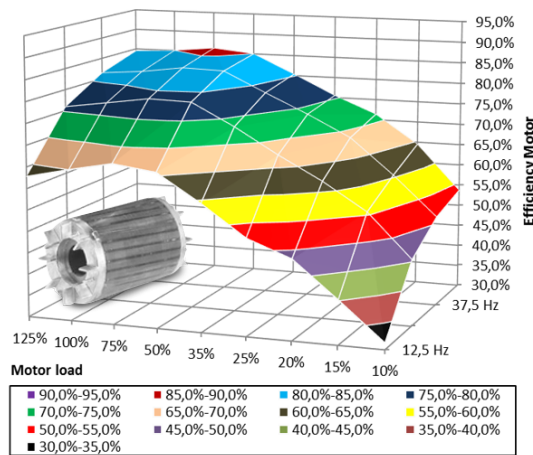

Efficiency PMSM; 1.5HP; IE3

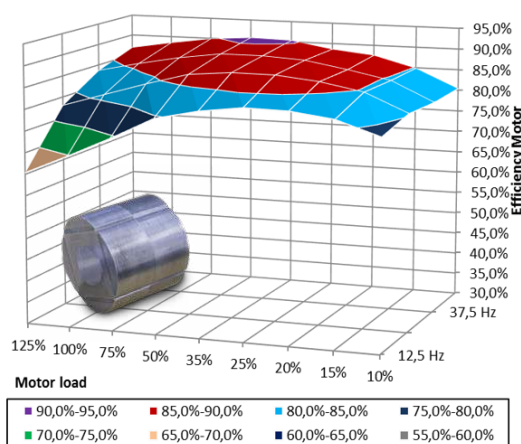

CleanConnect™ Plug Connector

- The CleanConnect™ stainless steel plug meets the toughest requirements for corrosion protection and allows rapid installation of the drive in a few easy steps.
- The stainless steel connector maintains the ingress protection of the drive. It ensures reliable connection without accidental detachment, along with a high IP67/IP69K protection rating.
- The associated power cable, as counterpart to the stainless steel plug, resists cleaning agents from pH2 to pH12 and can be assembled in any desired length.




Brake or Encoder Options

- Brake design is spring set and electro-mechanically released. Types include holding or dynamic. Spring-loaded pressure plate instantaneously releases when power is removed to lock the rotor shaft. Pressure plate automatically resets when power is restored.
- Encoder design is optical incremental. There are various options depending on the desired signal waveform and required resolution.
- Brakes or encoders are completely integrated into the motor housing, i.e. the high protection rating IP67/IP69K and the aseptic design are completely retained.
- Contact factory to add brake or encoder options. Customer must provide application details for review to reduce the risk of exceeding thermal limits.



Dimensions

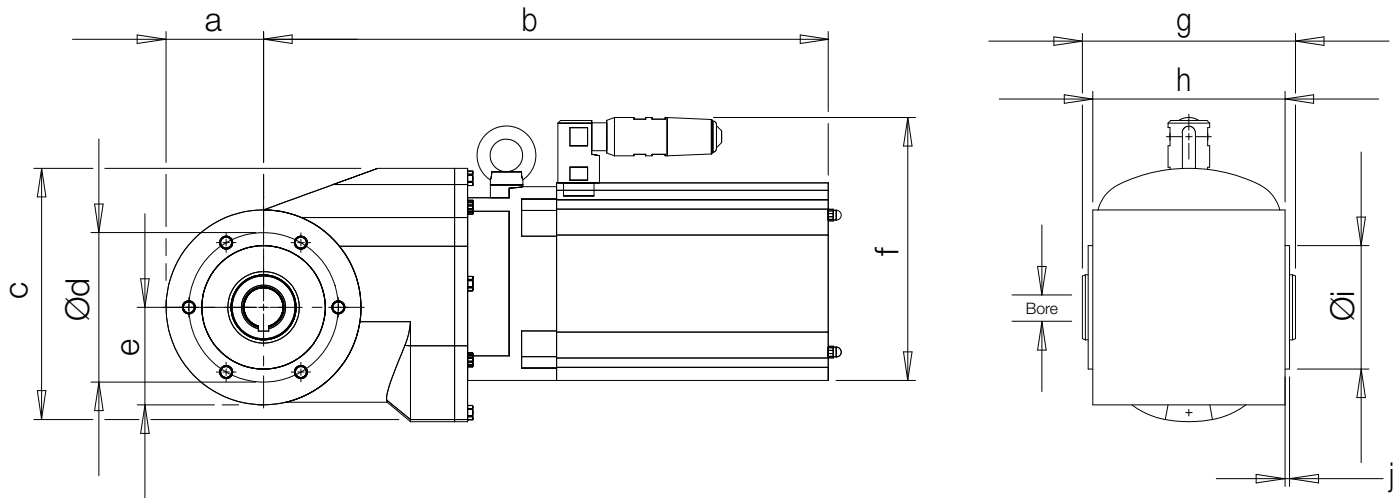

Hollow output shaft option shown

Dimensions (mm)

Type	a	b	c	d	e	f	g	h	i	j
BK04... / DAPE08YA4-2	59	356	152	85	59	205.5	131	122	70	2.5
BK04... / SA5E08MA4	59	356	152	85	59	205.5	131	122	70	2.5
BK08... / DAPE08YA4-2	62.5	374	167	100	62.5	205.5	150	134	80	3.5
BK08... / SA5E08MA4	62.5	374	167	100	62.5	205.5	150	134	80	3.5
BK08... / DAPE09SA4	62.5	413.5	167	100	62.5	216	150	134	80	3.5
BK08... / SA5E09SA4	62.5	413.5	167	100	62.5	216	150	134	80	3.5
BK08... / SA5E09XA4	62.5	413.5	167	100	62.5	216	150	134	80	3.5
BK17... / DAPE09XA4	75	434.5	195	115	75	216	164	148	95	3.5
BK17... / SA5E09SA4	75	434.5	195	115	75	216	164	148	95	3.5
BK17... / SA5E09XA4	75	434.5	195	115	75	216	164	148	95	3.5

Brake or Encoder option will add 100mm of additional length to "b" dimension. Contact factory for these options.

Metric Shaft Options (mm)

Gearbox	Hollow Bore	Solid	
		Diameter	Length
	H7 Tolerance	k6 Tolerance	
BK04	20	25	50
BK08	35	30	60
BK17	40	35	70

Inch Shaft Options (inches)

Gearbox	Hollow Bore	Solid	
		Diameter	Length
BK04	0.75	1.00	1.97
BK08	1.375	1.25	2.36
BK17	1.50	1.375	2.76

Value Engineered for Washdown Performance

CE / UL / cUL Certified

IP69K



Exterior Construction

300 Series stainless steel housing, end bells, output shaft and conduit box

Interior Features


- Meets NEMA MG 1-2016 Standards
- Inverter Duty
- Class F insulation
- Class "B" rise @ 1.15 service factor
- Thermal overload protected
- Epoxy-coated windings
- Internally-locked bearings to eliminate unwanted axial movement

D Stainless Steel AC Motors

Ordering Information

Stainless Steel AC Motors

Example: **HUT-5/8 SS**

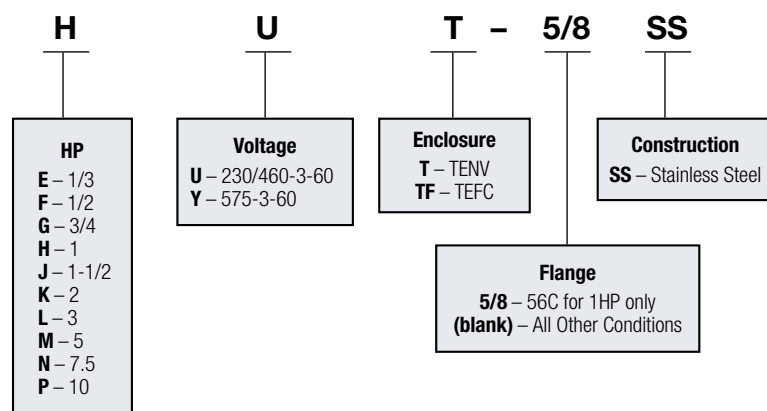

Performance Data

Part #	HP	Type	RPM	Frame	Voltage AC	Efficiency*	Full Load Amps (230/460)	Weight (lbs.)
EUT-SS	0.33	TENV	1760	56C	208-230/460-3-60	82.5%	1.07/0.55	26.2
FUT-SS	0.5	TENV	1760	56C	208-230/460-3-60	82.5%	1.56/0.78	33.1
FUTF-SS	0.5	TEFC	1760	56C	208-230/460-3-60	84.0%	1.56/0.78	33.9
NEW FYTF-SS	0.5	TEFC	1760	56C	575-3-60	84.0%	0.64(@575V)	33.9
GUT-SS	0.75	TENV	1760	56C	208-230/460-3-60	82.5%	2.26/1.13	33.3
HUT-5/8-SS	1	TENV	1760	56C	208-230/460-3-60	82.5%	2.98/1.5	38.4
HUTF-5/8-SS	1	TEFC	1760	56C	208-230/460-3-60	84.0%	2.98/1.5	39.2
NEW HYTF-5/8-SS	1	TEFC	1760	56C	575-3-60	84.0%	1.15(@575V)	38.6
HUT-SS	1	TENV	1760	143TC	208-230/460-3-60	85.5%	2.98/1.5	38.4
HUTF-SS	1	TEFC	1760	143TC	208-230/460-3-60	85.5%	2.98/1.5	38.6
JUTF-SS	1.5	TEFC	1750	145TC	208-230/460-3-60	86.5%	4.5/2.25	44.5
KUTF-SS	2	TEFC	1760	145TC	208-230/460-3-60	86.5%	5.63/2.82	48.3
LUTF-SS	3	TEFC	1760	182TC	208-230/460-3-60	89.5%	7.66/3.83	103.6
MUTF-SS	5	TEFC	1760	184TC	208-230/460-3-60	89.5%	12.5/6.3	119.0
NUTF-SS	7.5	TEFC	1760	213TC	208-230/460-3-60	91.0%	18.2/9.09	179.2
PUTFSS	10	TEFC	1760	215TC	208-230/460-3-60	91.7%	24.27/12.13	201.1

Ratings are for continuous duty at Max Ambient Temperature of 40°C
TENV = Totally enclosed, non-ventilated
TEFC = Totally enclosed, fan-cooled


All motors are inverter-duty rated at Service Factor of 1.15
Motors can be run at 50 Hz with a derating factor applied.
Efficiency meets or exceeds NEMA MG 1-2016




Stainless conduit box thread adaptor 25mm X 1.5 to 1/2"
NPT available separately as Boston Gear item J22770

Dimensions

TENV Totally Enclosed, Non-Ventilated

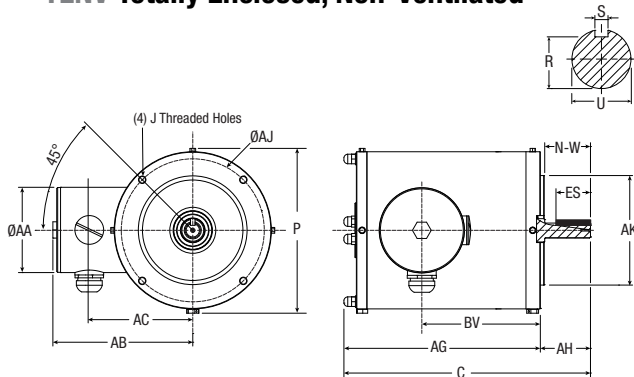

TEFC Totally Enclosed, Fan-Cooled

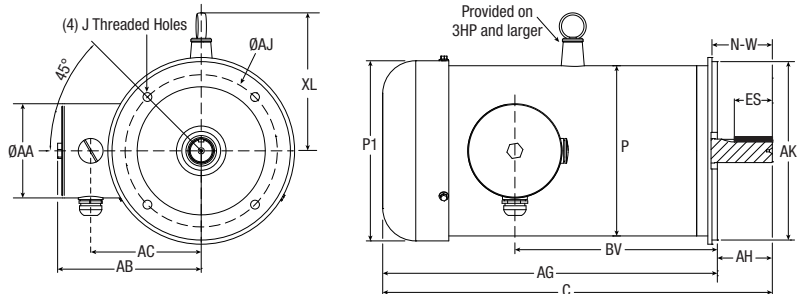

End bell shown is 180TC and larger

NEMA Frame Dimensions in inches

Boston Gear Bore Code	NEMA Frame	U	AK	AH	N-W	Key			AJ	J
						S	ES	R		
B5	56C	.6250	4.5000	2-1/16	1.88	3/16	1.41	0.517	5.875	3/8-16
		.6240	4.4970							
B7	143TC	.8750	4.5000	2-1/8	1.96	3/16	1.41	0.765	5.875	3/8-16
	145TC	.8740	4.4970							
B9	182TC	1.1250	8.5000	2-5/8	2.88	1/4	1.81	0.986	7.250	1/2-13
	184TC	1.1240	8.4970							
B11	213TC	1.3750	8.5000	3-1/8	3.38	5/16	2.44	1.201	7.250	1/2-13
	215TC	1.3740	8.4970							

Motor Dimensions in inches

Catalog No.	HP	Type	NEMA Frame	Mounting				Conduit Box				
				C	P	P1	AG	AA Dia.	AB	AC	BV	XL
EUT-SS	1/3	TENV	56C	10.11	6.45	—	8.05	3.48	5.79	4.29	4.45	—
FUT-SS	1/2	TENV	56C	10.11	6.45	—	8.05	3.48	5.79	4.29	4.45	—
FUTF-SS	1/2	TEFC	56C	11.69	6.45	6.93	9.63	3.48	5.79	4.29	4.45	—
FYTF-SS	1/2	TEFC	56C	11.69	6.45	6.93	9.63	3.48	5.79	4.29	4.45	—
GUT-SS	3/4	TENV	56C	10.11	6.45	—	8.05	3.48	5.79	4.29	4.45	—
HUT-5/8-SS	1	TENV	56C	11.29	6.45	—	9.23	3.48	5.79	4.29	5.63	—
HUTF-5/8-SS	1	TEFC	56C	12.87	6.45	6.93	10.81	3.48	5.79	4.29	4.45	—
HYTF-5/8-SS	1	TEFC	56C	12.87	6.45	6.93	10.81	3.48	5.79	4.29	4.45	—
HUT-SS	1	TENV	143TC	11.36	6.45	—	9.23	3.48	5.79	4.29	4.45	—
HUTF-SS	1	TEFC	143TC	12.95	6.45	6.93	10.84	3.48	5.79	4.29	5.63	—
JUTF-SS	1-1/2	TEFC	145TC	13.75	6.45	6.93	11.62	3.48	5.79	4.29	6.42	—
KUTF-SS	2	TEFC	145TC	13.75	6.45	6.93	11.62	3.48	5.79	4.29	6.42	—
LUTF-SS	3	TEFC	182TC	17.2	8.11	8.58	14.58	4.47	6.85	5.24	8.07	6.6
MUTF-SS	5	TEFC	184TC	18.58	8.11	8.58	15.96	4.47	6.85	5.24	9.45	6.6
NUTF-SS	7-1/2	TEFC	213TC	19.45	9.6	10.08	16.33	4.47	7.56	6.1	9.61	7.4
PUTF-SS	10	TEFC	215TC	20.44	9.6	10.08	17.32	4.47	7.56	6.1	9.61	7.4

Conduit box threads M25 X 1.5

*More Models
Now Available
with Eccentric
Locking Collar*



Product Features

- Synthetic lip seal with stainless steel flinger provides superior protection for high pressure washdown conditions
- Pre-filled with NSF H1 food grade grease
- Cast stainless steel housing
- Laser marked
- M6 grease fitting

**Ask about our Kilian line of
Polymer Housing Stainless
Steel Mounted Bearings**



Ordering Information

Mounted Bearings

Example: SSUP4-3/4

SS	U	P	4	-	3/4	
Construction SS – Stainless Steel	U – Setscrew Locking H – Eccentric Locking	Type P – Pillow Block FL – 2-Bolt Flange F – 4-Bolt Flange FB – 3-Bolt Flange T – Take-Up	Bearing Size 4 5 6 7 8 10		Bore Size 3/4 – 0.750 1 – 1.000 1-3/16 – 1.188 1-1/4 – 1.250 1-7/16 – 1.438 1-1/2 – 1.500 1-15/16 – 1.938	Model Variation A – Optional for 1,000" Bore Size Only


Replacement Bearing Insert

Example: SSUC204-12

SS	U	C	204	-	12
Construction SS – Stainless Steel	U – Setscrew Locking H – Eccentric Locking	Replacement Bearing Insert	Bearing Size 204 205 206 207 208 210		Bore Size (In 1/16 inch) 12 – 0.750 16 – 1.000 19 – 1.188 20 – 1.250 23 – 1.438 24 – 1.500 31 – 1.938

Pillow Blocks

2 Bolt Pillow Block - Setscrew Locking Extended Inner Race

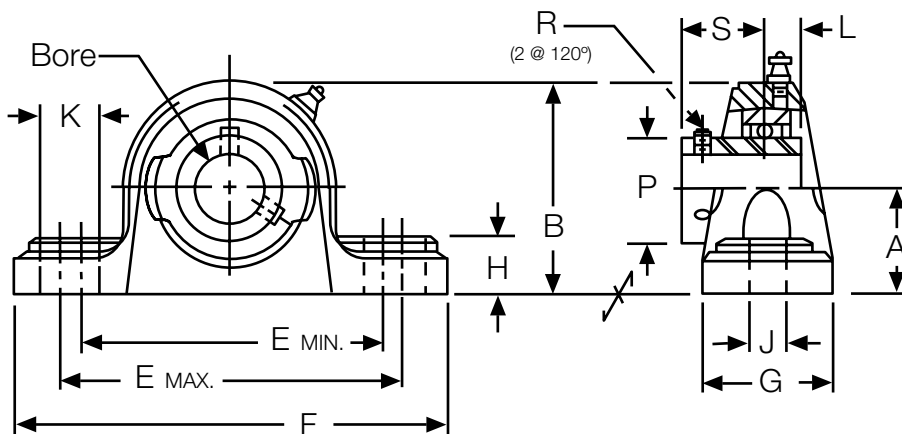

Bore Size	Mounted Bearing		Bearing Insert	
	Catalog Number	Item Code	Catalog Number	Item Code
3/4	SSUP4-3/4	G01140	SSUC204-12	G01171
1	SSUP5-1	G01141	SSUC205-16	G01172
1-3/16	SSUP6-1-3/16	G01142	SSUC206-19	G01173
1-1/4	SSUP7-1-1/4	G01143	SSUC207-20	G01174
1-7/16	SSUP7-1-7/16	G01144	SSUC207-23	G01175
1-1/2	SSUP8-1-1/2	G05900	SSUC208-24	G05922
1-15/16	SSUP10-1-15/16	G05901	SSUC210-31	G05923

Stainless Steel Material	
AISI 304	AISI 440
Housing, cage, shield, setscrew, seal	Balls, inner/outer ring

Catalog Number	Bore Size	Dimensions (in)														Load Rating* (lbf)	
		A	B	E _{max}	E _{min}	F	G	H	J	K	L	P	R (UNF)	S	Bolt Size	CR	CO
SSUP4-3/4	3/4	1-5/16	2-9/16	4-1/8	3-3/8	5	1-1/2	9/16	1/2	3/4	0.500	1.142	1/4-28	0.721	3/8	2,901	1,507
SSUP5-1	1	1-7/16	2-25/32	4-1/2	3-3/4	5-1/2	1-1/2	19/32	1/2	3/4	0.563	1.339	1/4-28	0.780	3/8	3,175	1,782
SSUP6-1-3/16	1-3/16	1-11/16	3-1/4	5-1/32	4-15/32	6-1/2	1-7/8	21/32	43/64	25/32	0.626	1.591	1/4-28	0.874	1/2	4,431	2,558
SSUP7-1-1/4	1-1/4	1-7/8	3-21/32	5-9/32	4-23/32	6-9/16	1-7/8	45/64	43/64	25/32	0.689	1.866	5/16-24	1.000	1/2	5,847	3,472
SSUP7-1-7/16	1-7/16	1-7/8	3-21/32	5-9/32	4-23/32	6-9/16	1-7/8	45/64	43/64	25/32	0.689	1.866	5/16-24	1.000	1/2	5,847	3,472
SSUP8-1-1/2	1-1/2	1-15/16	3-15/16	5-11/16	5-1/8	7-1/4	2-1/8	45/64	43/64	25/32	0.748	2.075	5/16-24	1.189	1/2	6,632	4,069
SSUP10-1-15/16	1-15/16	2-1/4	4-29/64	6-17/32	5-31/32	8-1/8	2-3/8	53/64	25/32	29/32	0.748	2.465	3/8-24	1.284	5/8	7,868	5,216


Notes: Bore tolerance: +.001"/-.000".

Recommended shaft tolerance: Nominal +.000"/-.001".

Max recommended speed is 5000 RPM.

*CR=dynamic load rating, CO=static load rating.

Pillow Blocks

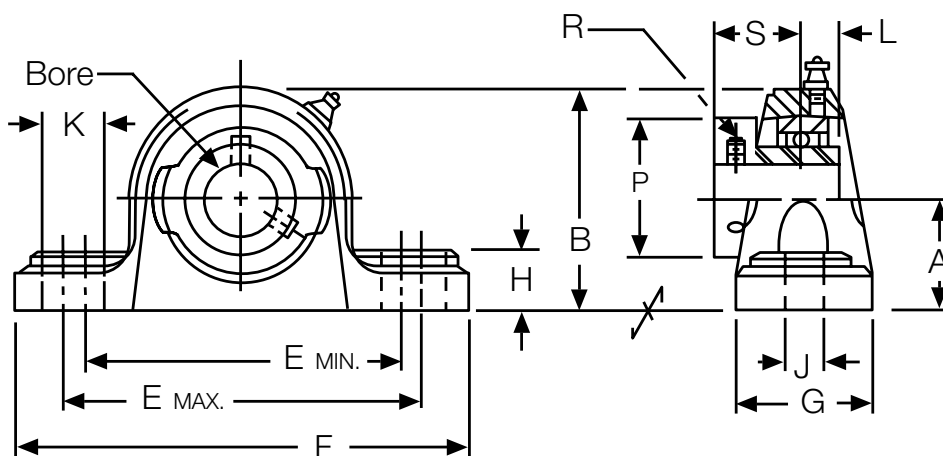2 Bolt Pillow Block - Eccentric Locking Collar
For Superior Shaft Holding Power

Bore Size	Mounted Bearing		Bearing Insert	
	Catalog Number	Item Code	Catalog Number	Item Code
3/4	SSHP4-3/4	G01145	SSHC204-12	G01176
1	SSHP5-1	G01146	SSHC205-16	G01177
1-3/16	SSHP6-1-3/16	G01147	SSHC206-19	G01178
1-1/4	SSHP7-1-1/4	G01148	SSHC207-20	G01179
1-7/16	SSHP7-1-7/16	G01149	SSHC207-23	G01180
1-1/2	SSHP8-1-1/2	G05902	SSHC208-24	G05924
1-15/16	SSHP10-1-15/16	G05903	SSHC210-31	G05925

Stainless Steel Material	
AISI 304	AISI 440
Housing, cage, shield, setscrew, seal, collar	Balls, inner/outer ring

		Dimensions (in)													Load Rating* (lbf)		
Catalog Number	Bore Size	A	B	E _{max}	E _{min}	F	G	H	J	K	L	P	R (UNF)	S	Bolt Size	CR	CO
SSHP4-3/4	3/4	1-5/16	2-9/16	4-1/8	3-3/8	5	1-1/2	9/16	1/2	3/4	0.673	1.311	1/4-28	1.047	3/8	2,901	1,507
SSHP5-1	1	1-7/16	2-25/32	4-1/2	3-3/4	5-1/2	1-1/2	19/32	1/2	3/4	0.689	1.500	1/4-28	1.059	3/8	3,175	1,782
SSHP6-1-3/16	1-3/16	1-11/16	3-1/4	5-1/32	4-15/32	6-1/2	1-7/8	21/32	43/64	25/32	0.720	1.713	1/4-28	1.186	1/2	4,431	2,558
SSHP7-1-1/4	1-1/4	1-7/8	3-21/32	5-9/32	4-23/32	6-9/16	1-7/8	45/64	43/64	25/32	0.740	2.087	5/16-24	1.272	1/2	5,847	3,472
SSHP7-1-7/16	1-7/16	1-7/8	3-21/32	5-9/32	4-23/32	6-9/16	1-7/8	45/64	43/64	25/32	0.740	2.087	5/16-24	1.272	1/2	5,847	3,472
SSHP8-1-1/2	1-1/2	1-15/16	3-15/16	5-11/16	5-1/8	7-1/4	2-1/8	45/64	43/64	25/32	0.748	2.283	5/16-24	1.378	1/2	6,632	4,069
SSHP10-1-15/16	1-15/16	2-1/4	4-29/64	6-17/32	5-31/32	8-1/8	2-3/8	53/64	25/32	29/32	0.969	2.697	3/8-24	1.500	5/8	7,868	5,216

Notes: Bore tolerance: +.001"/-.000".


Recommended shaft tolerance: Nominal +.000"/-.001".

Max recommended speed is 5000 RPM.

*CR=dynamic load rating, Co=static load rating.

Flanged Units

2 Bolt Flange - Setscrew Locking Extended Inner Race

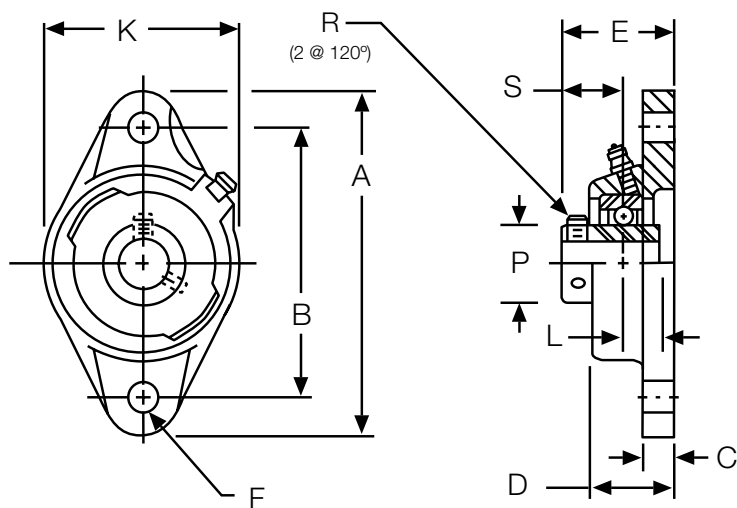

Bore Size	Mounted Bearing		Bearing Insert	
	Catalog Number	Item Code	Catalog Number	Item Code
3/4	SSUFL4-3/4	G01150	SSUC204-12	G01171
1	SSUFL5-1	G01151	SSUC205-16	G01172
1	SSUFL5-1A	G05970	SSUC205-16	G01172
1-3/16	SSUFL6-1-3/16	G01152	SSUC206-19	G01173
1-1/4	SSUFL7-1-1/4	G01153	SSUC207-20	G01174
1-7/16	SSUFL7-1-7/16	G01154	SSUC207-23	G01175
1-1/2	SSUFL8-1-1/2	G05904	SSUC208-24	G05922
1-15/16	SSUFL10-1-15/16	G05905	SSUC210-31	G05923

Stainless Steel Material	
AISI 304	AISI 440
Flange, cage, shield, setscrew, seal	Balls, inner/outer ring

Catalog Number	Bore Size	Dimensions (in)											Load Rating* (lbf)	
		A	B	C	D	E	Bolt Size F**	K	L	P	R (UNF)	S	CR	CO
SSUFL4-3/4	3/4	4-7/16	3-35/64	7/16	1.000	1-5/16	3/8	2-3/8	0.500	1.142	1/4-28	0.721	2,901	1,507
†† SSUFL5-1	1	5-1/8	3-57/64	1/2	1.063	1-13/32	1/2	2-11/16	0.563	1.339	1/4-28	0.780	3,175	1,782
SSUFL5-1A	1	5-1/8	3-57/64	1/2	1.063	1-13/32	3/8	2-11/16	0.563	1.339	1/4-28	0.780	3,175	1,782
†† SSUFL6-1-3/16	1-3/16	5-13/16	4-39/64	1/2	1.219	1-19/32	1/2	3-5/32	0.626	1.591	1/4-28	0.874	4,431	2,558
SSUFL7-1-1/4	1-1/4	6-11/32	5-1/8	35/64	1.344	1-3/4	1/2	3-35/64	0.689	1.866	5/16-24	1.000	5,847	3,472
†† SSUFL7-1-7/16	1-7/16	6-11/32	5-1/8	35/64	1.344	1-3/4	1/2	3-35/64	0.689	1.866	5/16-24	1.000	5,847	3,472
SSUFL8-1-1/2	1-1/2	6-7/8	5-43/64	35/64	1.422	2-1/64	1/2	3-15/16	0.748	2.075	5/16-24	1.189	6,632	4,069
SSUFL10-1-15/16	1-15/16	7-3/4	6-3/16	19/32	1.578	2-5/32	5/8	4-17/32	0.748	2.465	3/8-24	1.284	7,868	5,216

Notes: Bore tolerance: +.001"/-.000".

Recommended shaft tolerance: Nominal +.000"/-.001".

Max recommended speed is 5000 RPM.

*CR=dynamic load rating, Co=static load rating.

** Smaller bolt sizes are acceptable with the use of flat washers


†† Models available with eccentric locking collar (See Table 1 for new dimensions)

NEW

Table 1
Dimensions if ordered with eccentric locking collar

Catalog Number	L	P	S
SSHFL5-1	0.689	1.500	1.059
SSHFL6-1-3/16	0.720	1.713	1.186
SSHFL7-1-7/16	0.740	2.087	1.272

Flanged Unit

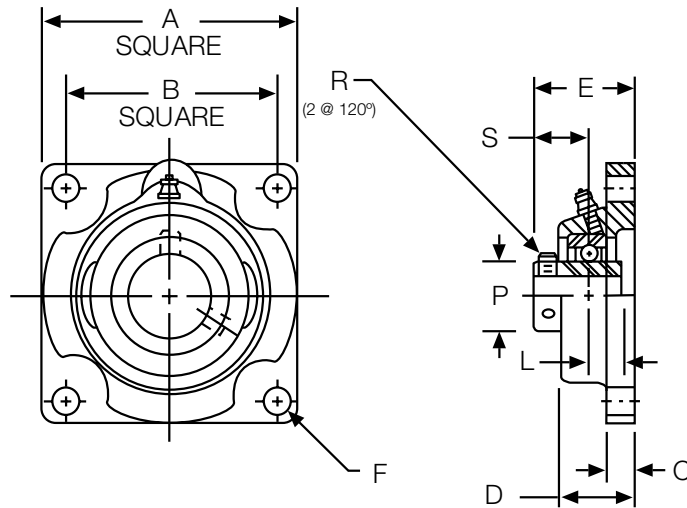4 Bolt Flange - Setscrew Locking
Extended Inner Race

Bore Size	Mounted Bearing		Bearing Insert	
	Catalog Number	Item Code	Catalog Number	Item Code
3/4	SSUF4-3/4	G01155	SSUC204-12	G01171
1	SSUF5-1	G01156	SSUC205-16	G01172
1-3/16	SSUF6-1-3/16	G01157	SSUC206-19	G01173
1-1/4	SSUF7-1-1/4	G01158	SSUC207-20	G01174
1-7/16	SSUF7-1-7/16	G01159	SSUC207-23	G01175
1-1/2	SSUF8-1-1/2	G05906	SSUC208-24	G05922
1-15/16	SSUF10-1-15/16	G05907	SSUC210-31	G05923

Stainless Steel Material	
AISI 304	AISI 440
Flange, cage, shield, setscrew, seal	Balls, inner/outer ring

Catalog Number	Bore Size	Dimensions (in)										Load Rating* (lbf)	
		A	B	C	D	E	Bolt Size F**	L	P	R (UNF)	S	CR	CO
SSUF4-3/4	3/4	3-3/8	2-33/64	15/32	1.000	1-5/16	3/8	0.500	1.142	1/4-28	0.721	2,901	1,507
†† SSUF5-1	1	3-3/4	2-3/4	35/64	1.063	1-13/32	3/8	0.563	1.339	1/4-28	0.780	3,175	1,782
†† SSUF6-1-3/16	1-3/16	4-1/4	3-17/64	35/64	1.219	1-19/32	3/8	0.626	1.591	1/4-28	0.874	4,431	2,558
SSUF7-1-1/4	1-1/4	4-39/64	3-5/8	5/8	1.344	1-3/4	7/16	0.689	1.866	5/16-24	1.000	5,847	3,472
†† SSUF7-1-7/16	1-7/16	4-39/64	3-5/8	5/8	1.344	1-3/4	7/16	0.689	1.866	5/16-24	1.000	5,847	3,472
SSUF8-1-1/2	1-1/2	5-1/8	4-1/64	5/8	1.422	2-1/64	1/2	0.748	2.075	5/16-24	1.189	6,632	4,069
SSUF10-1-15/16	1-15/16	5-13/32	4-3/8	23/32	1.578	2-5/32	1/2	0.748	2.465	3/8-24	1.284	7,868	5,216

Notes: Bore tolerance: $+.001"/-0.000"$.

Recommended shaft tolerance: Nominal $+.000"/-0.001"$.

Max recommended speed is 5000 RPM.

*CR=dynamic load rating, Co=static load rating.

** Smaller bolt sizes are acceptable with the use of flat washers


†† Models available with eccentric locking collar (See Table 1 for new dimensions)

NEW

Table 1
Dimensions if ordered with eccentric locking collar

Catalog Number	L	P	S
SSHF5-1	0.689	1.500	1.059
SSHF6-1-3/16	0.720	1.713	1.186
SSHF7-1-7/16	0.740	2.087	1.272

3 Bolt Flange - Setscrew Locking Extended Inner Race

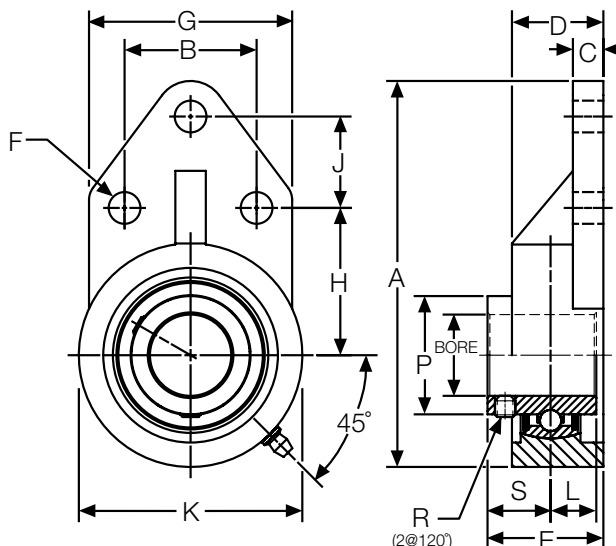

Bore Size	Mounted Bearing		Bearing Insert	
	Catalog Number	Item Code	Catalog Number	Item Code
3/4	SSUFB4-3/4	G05908	SSUC204-12	G01171
1	SSUFB5-1	G05909	SSUC205-16	G01172
1-3/16	SSUFB6-1-3/16	G05910	SSUC206-19	G01173
1-1/4	SSUFB7-1-1/4	G05911	SSUC207-20	G01174
1-7/16	SSUFB7-1-7/16	G05912	SSUC207-23	G01175
1-1/2	SSUFB8-1-1/2	G05913	SSUC208-24	G05922
1-15/16	SSUFB10-1-15/16	G05914	SSUC210-31	G05923

Stainless Steel Material	
AISI 304	AISI 440
Flange, cage, shield, setscrew, seal	Balls, inner/outer ring

Catalog Number	Bore Size	Dimensions (in)														Load Rating* (lbf)	
		A	B	C	D	E	Bolt Size F**	G	H	J	K	L	P	R (UNF)	S	CR	CO
SSUFB4-3/4	3/4	4-1/4	1-1/2	5/16	1	1.35	5/16	2-3/8	1-11/16	7/8	2-1/2	0.500	1.142	1/4-28	0.850	2,901	1,507
SSUFB5-1	1	4-3/4	1-5/8	3/8	1-5/64	1.43	5/16	2-1/2	1-13/16	1-1/8	2-3/4	0.563	1.339	1/4-28	0.867	3,175	1,782
SSUFB6-1-3/16	1-3/16	5-3/8	1-7/8	3/8	1-7/64	1-19/32	5/16	2-3/4	2-1/16	1-1/4	3-1/4	0.626	1.591	1/4-28	0.968	4,431	2,558
SSUFB7-1-1/4	1-1/4	6-1/8	2	1/2	1-1/4	1-3/4	7/16	3-1/4	2-3/8	1-1/4	3-3/4	0.689	1.866	5/16-24	1.061	5,847	3,472
SSUFB7-1-7/16	1-7/16	6-1/8	2	1/2	1-1/4	1-3/4	7/16	3-1/4	2-3/8	1-1/4	3-3/4	0.689	1.866	5/16-24	1.061	5,847	3,472
SSUFB8-1-1/2	1-1/2	6-15/32	1-31/32	5/8	1-13/32	2-1/64	3/8	3-1/16	2-3/8	1-5/8	3-15/16	0.748	2.075	5/16-24	1.267	6,632	4,069
SSUFB10-1-15/16	1-15/16	7-1/2	2-3/4	1/2	1-1/2	2-5/32	7/16	4	2-15/16	1-5/8	4-5/8	0.748	2.465	3/8-24	1.408	7,868	5,216

Notes: Bore tolerance: +.001"/-.000".

Recommended shaft tolerance: Nominal +.000"/-.001".

Max recommended speed is 5000 RPM.


*CR=dynamic load rating, CO=static load rating.

** Smaller bolt sizes are acceptable with the use of flat washers

E Stainless Steel Mounted Bearings

Take Up Unit

Wide Slot Take Up Unit - Setscrew Locking Extended Inner Race

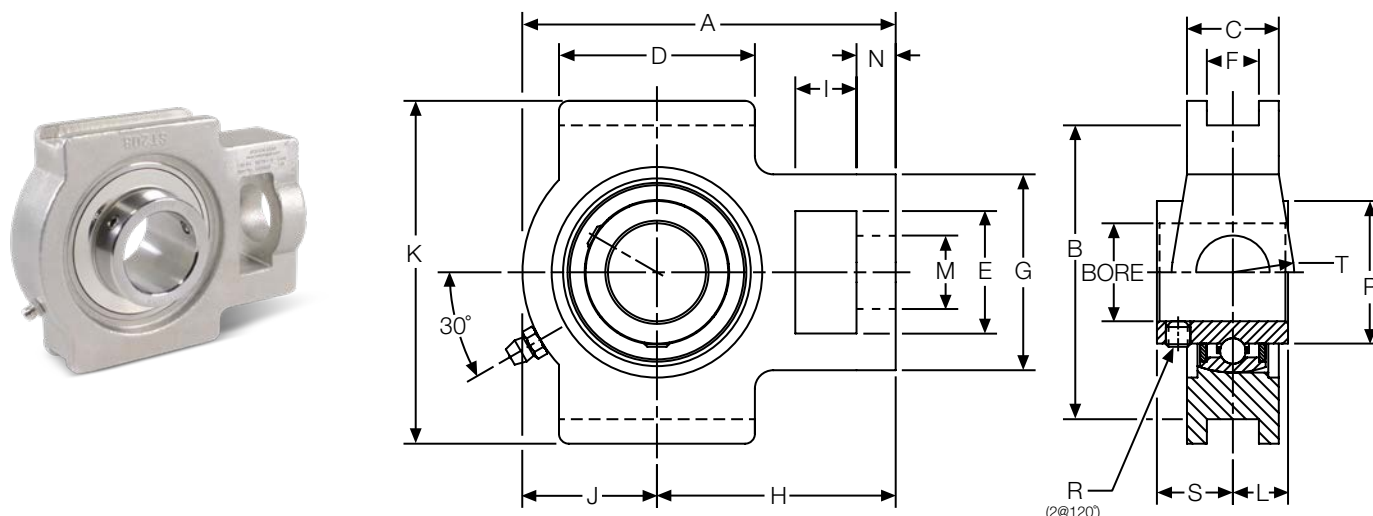

Bore Size	Mounted Bearing		Bearing Insert	
	Catalog Number	Item Code	Catalog Number	Item Code
3/4	SSUT4-3/4	G05915	SSUC204-12	G01171
1	SSUT5-1	G05916	SSUC205-16	G01172
1-3/16	SSUT6-1-3/16	G05917	SSUC206-19	G01173
1-1/4	SSUT7-1-1/4	G05918	SSUC207-20	G01174
1-7/16	SSUT7-1-7/16	G05919	SSUC207-23	G01175
1-1/2	SSUT8-1-1/2	G05920	SSUC208-24	G05922
1-15/16	SSUT10-1-15/16	G05921	SSUC210-31	G05923

Stainless Steel Material	
AISI 304	AISI 440
Flange, cage, shield, setscrew, seal	Balls, inner/outer ring

		Dimensions (in)																	Load Rating* (lbf)	
Catalog Number	Bore Size	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R (UNF)	S	CR	CO
SSUT4-3/4	3/4	3-11/16	2-63/64	13/16	2-1/64	1.250	0.469	2-1/64	2-13/32	0.625	1-9/32	3-1/2	0.500	0.750	0.391	1.142	1/4-28	0.721	2,901	1,507
SSUT5-1	1	3-13/16	2-63/64	15/16	2-1/64	1.250	0.469	2-1/64	2-7/16	0.625	1-3/8	3-1/2	0.563	0.750	0.391	1.339	1/4-28	0.780	3,175	1,782
SSUT6-1-3/16	1-3/16	4-29/64	3-1/2	1-3/32	2-1/4	1.453	0.469	2-7/32	2-3/4	0.625	1-45/64	4-1/64	0.626	0.859	0.391	1.591	1/4-28	0.874	4,431	2,558
SSUT7-1-1/4	1-1/4	5-5/64	3-1/2	1-3/16	2-33/64	1.453	0.469	2-33/64	3-5/64	0.625	2	4-1/64	0.689	0.859	0.516	1.866	5/16-24	1.000	5,847	3,472
SSUT7-1-7/16	1-7/16	5-5/64	3-1/2	1-3/16	2-33/64	1.453	0.469	2-33/64	3-5/64	0.625	2	4-1/64	0.689	0.859	0.516	1.866	5/16-24	1.000	5,847	3,472
SSUT8-1-1/2	1-1/2	5-43/64	4-1/64	1-5/16	3-17/64	1.938	0.625	3-17/64	3-1/2	0.750	2-11/64	4-31/64	0.748	1.141	0.625	2.075	5/16-24	1.189	6,632	4,069
SSUT10-1-15/16	1-15/16	5-55/64	4-1/64	1-15/32	3-17/64	1.938	0.625	3-17/64	3-35/64	0.750	2-5/16	4-39/64	0.748	1.141	0.625	2.465	3/8-24	1.284	7,868	5,216

Notes: Bore tolerance: +.001"/-.000".

Recommended shaft tolerance: Nominal +.000"/-.001".

Max recommended speed is 5000 RPM.

*CR=dynamic load rating, Co=static load rating.




SSFC Series - Insert (3 Jaw) Type Coupling

- 316 stainless steel with passivated finish
- Precision machined bore or solid hubs
- Three types of inserts for different service requirements
- No lubrication needed
- Stocked bores complete with keyway and stainless setscrew
- Custom bore sizes available on request




JS Series - Pin and Block Type Universal Joints

- Connect shafts at angles up to 30 degrees and speeds up to 2,000 RPM
- Precision machined bore or solid hubs
- Self-locking assembly rings (hubs 7/8" and larger)
- Riveted bearing pin (hubs 3/4" and smaller)
- Joint covers keep dirt/moisture out and lubricant in

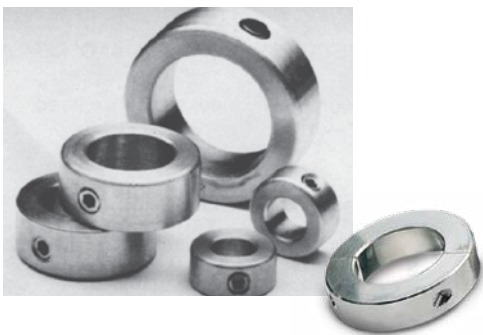

SSC/CSSC/2SSC Series - Collars

- Setscrew, 1-piece clamp & 2-piece clamp styles for locking
- Setscrew type suitable for temps up to 800° F, ideal for autoclaved hygienic equipment
- Clamp type conform to OSHA with recessed screw heads, provide convenient adjusting and removal




SAO Series - Thrust Washers & Thrust Ball Bearings


- Hardened and ground surface
- Ideal as a radial bearing surface
- Negligible friction when used as a set with thrust bearing sandwiched between 2 thrust washers

Ordering Information


Couplings

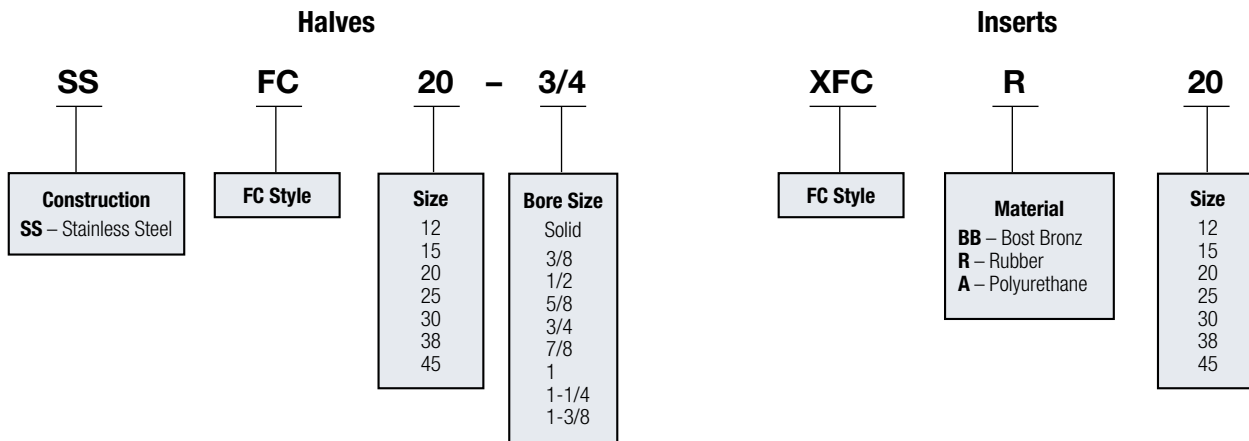

Universal Joints

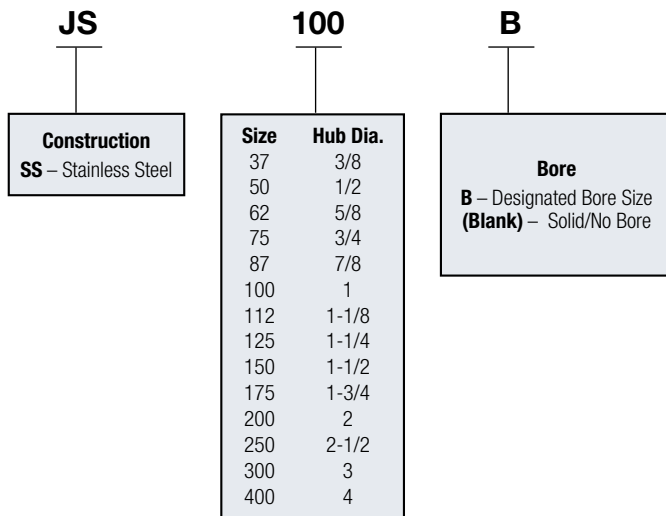

Collars

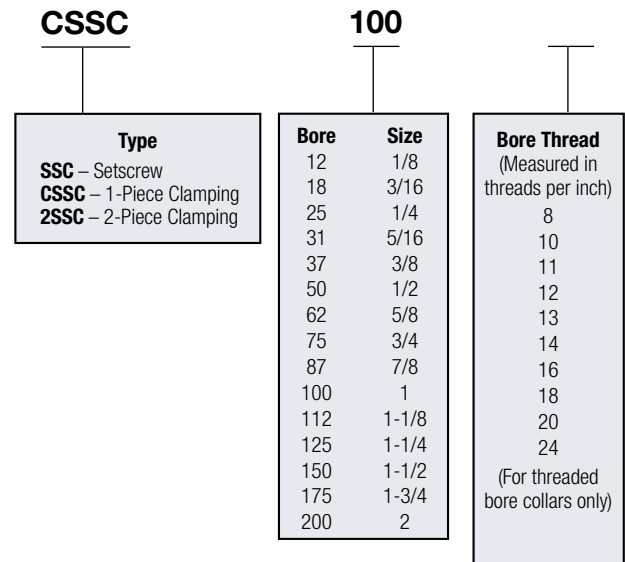

Thrust Washers

SAO 8 Washer

1	3/16 Bore
5	1/4 Bore
8	5/16 Bore
10	3/8 Bore
16	1/2 Bore

Thrust Ball Bearings

SAO 8 CN

1	3/16 Bore
5	1/4 Bore
8	5/16 Bore
10	3/8 Bore
16	1/2 Bore

Performance

- Oil-Impregnated Bost-Bronz – recommended for high torque loads, particularly at slower speeds.
- Oil-Resistant Synthetic Rubber – recommended when quietness is desired, particularly at motor speeds.
- Polyurethane – recommended where moderate to heavy shock loads are encountered.

Load Rating Table

Coupling Size	Maximum Horsepower Rating at RPM*								Misalignment Tolerances		Max Torque (lb-in)
	50	100	300	690	870	1150	1750	3450	Lateral/Parallel	Angular	
XFCBB BOST-BRONZ INSERTS											
SSFC12	0.16	0.32	0.95	2.2	2.8	3.6	5.6	—	.001	.011	200
SSFC15	0.40	0.79	2.4	5.5	6.9	9.1	13.9	—		.013	500
SSFC20	0.79	1.6	4.8	10.9	13.8	18.2	—	—		.018	1000
SSFC25	1.4	2.9	8.6	19.7	24.8	—	—	—		.022	1800
SSFC30	2.5	5.1	15.2	35.0	—	—	—	—		.026	3200
SSFC38	5.6	11.1	33.3	—	—	—	—	—		.032	7000
SSFC45	8.7	17.5	—	—	—	—	—	—		.039	11000
XFCR RUBBER INSERTS											
SSFC12	—	0.10	0.31	0.71	0.90	1.2	1.8	3.6	.002	.033	65
SSFC15	—	0.20	0.60	1.4	1.7	2.3	3.5	56.8		.039	125
SSFC20	—	0.40	1.2	2.7	3.5	4.6	6.9	13.7		.053	250
SSFC25	—	0.71	2.1	4.9	6.2	8.2	12.5	24.6		.066	450
SSFC30	—	1.3	3.8	8.8	11.0	14.6	22.2	43.8		.078	800
SSFC38	—	2.5	7.6	17.5	22.1	29.2	44.4	—		.097	1600
SSFC45	—	4.4	13.3	30.7	38.7	51.1	77.7	—		.117	2800
XFCA POLYURETHANE INSERTS											
SSFC12	0.09	0.19	0.56	1.2	1.6	2.0	3.0	5.7	.002	.022	125
SSFC15	0.18	0.37	1.1	2.5	3.1	4.0	6.0	11.3		.026	250
SSFC20	0.35	0.70	2.1	4.6	5.7	7.5	11.1	20.7		.035	470
SSFC25	0.62	1.2	3.7	8.1	10.1	13.1	19.3	35.8		.044	845
SSFC30	1.1	2.2	6.5	14.4	17.9	23.3	34.3	63.6		.052	1500
SSFC38	2.2	4.3	12.9	28.4	35.3	45.8	67.3	—		.065	3000
SSFC45	3.7	7.5	22.4	49.2	61.0	79.0	115.9	—		.078	5250

*For uniform load.


Selection Procedure

1. From Table select Service Factor.
2. Determine Design Load
Design HP = Application HP × S.F.
or
Design Torque = Application Torque × S.F.
3. Select coupling size from Load Rating Table which has a rating equal to or greater than the design load

COUPLING SERVICE FACTOR

Load Classification	Service Factor
Uniform	1
Moderate Shock	1.75
Heavy Shock	2.5

Dimensions

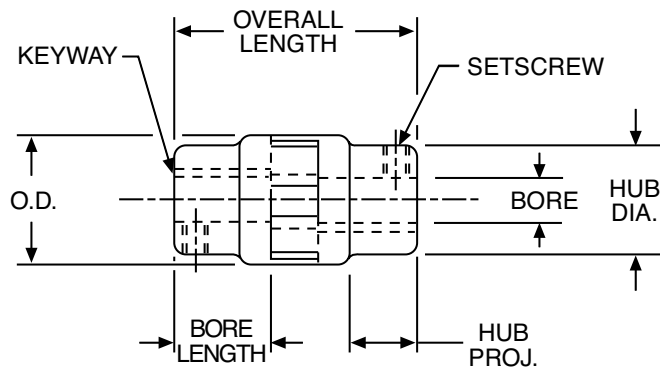

All Dimensions in Inches
Order By Catalog Number or Item Code
 To order complete coupling order two coupling halves and one coupling insert

			Dimensions (in)								Coupling Halves		Insert					
Coupling Size	Bore	Max. Bore	Bore Length *	OD	Overall Length **	Hub		Assy. Clearance	Standard Keyway Size	Standard Setscrew Size	Catalog Number	Item Code	Bost-Bronz		Rubber		Polyurethane	
						Dia.	Proj.						Catalog Number	Item Code	Catalog Number	Item Code	Catalog Number	Item Code
SSFC12	SOLID	5/8	N/A	1-1/4	2-5/16	1	5/8	3-3/16	N/A	N/A	SSFC12 SOLID	G89785	XFCBB12	08064	XFCR12	08078	XFCA12	08050
	3/8		27/32						3/32 × 3/64	10-32	SSFC12-3/8	G89783						
	1/2								1/8 × 1/16	1/4-20	SSFC12-1/2	G89784						
SSFC15	SOLID	7/8	N/A	1-1/2	2-3/4	1-1/4	3/4	3-3/4	N/A	N/A	SSFC15 SOLID	G89789	XFCBB15	08066	XFCR15	08080	XFCA15	08052
	1/2		1/8 × 1/16						1/4-20	SSFC15-1/2	G89786							
	5/8		3/16 × 3/32						5/16-18	SSFC15-5/8	G89787							
	3/4		3/16 × 3/32						5/16-18	SSFC15-3/4	G89788							
SSFC20	SOLID	1-1/8	N/A	2	3-11/16	1-3/4	1-1/8	4-13/16	N/A	N/A	SSFC20 SOLID	G89794	XFCBB20	08068	XFCR20	08082	XFCA20	08054
	5/8		3/16 × 3/32						5/16-18	SSFC20-5/8	G89790							
	3/4		3/16 × 3/32						5/16-18	SSFC20-3/4	G89791							
	7/8		3/16 × 3/32						5/16-18	SSFC20-7/8	G89792							
	1		1/4 × 1/8						3/8-16	SSFC20-1	G89793							
SSFC25	SOLID	1-3/8	N/A	2-1/2	4-1/8	2-1/4	1-1/4	5-3/8	N/A	N/A	SSFC25 SOLID	G89798	XFCBB25	08070	XFCR25	08084	XFCA25	08056
	3/4		3/16 × 3/32						5/16-18	SSFC25-3/4	G89795							
	1		1/4 × 1/8						3/8-16	SSFC25-1	G89796							
	1-1/4		1/4 × 1/8						3/8-16	SSFC25-1-1/4	G89797							
SSFC30	SOLID	1-5/8	N/A	3	5-15/32	2-3/4	1-11/16	7	N/A	N/A	SSFC30 SOLID	G89802	XFCBB30	08072	XFCR30	08086	XFCA30	08058
	1		1/4 × 1/8						3/8-16	SSFC30-1	G89799							
	1-1/4		1/4 × 1/8						3/8-16	SSFC30-1-1/4	G89800							
	1-3/8		5/16 × 5/32						7/16-14	SSFC30-1-3/8	G89801							
SSFC38	SOLID	1-7/8	N/A	3-3/4	6-5/16	3-1/2	1-7/8	8-3/16	N/A	N/A	SSFC38 SOLID	G89809	XFCBB38	08074	XFCR38	08088	XFCA38	08060
SSFC45	SOLID	2-1/8	N/A	4-1/2	7-3/16	4	2-1/8	9-5/16	N/A	N/A	SSFC45 SOLID	G89810	XFCBB45	08076	XFCR45	08090	XFCA45	08062

*Length of hole in each half. **Total length of assembled coupling with jaws engaged to full depth.

Notes: Bore tolerance: +.001"/-.000".
 Recommended shaft tolerance: Nominal
 +.000"/-.001".


**24 HOUR
MODIFIED STOCK
SHIPMENT**

Contact the factory for bore sizes not listed above.
 Inch and metric options available.

Alignment

Alignment of Boston couplings should be performed by the following steps to meet lateral and angular misalignment specifications below.

1. Align shafts and supports to give minimum lateral and angular misalignment.
2. Assemble coupling halves to shaft.
3. Slide couplings together and check lateral misalignment using straight edge and feeler gauge over coupling outside diameter. This should be within specifications below.
4. Lock couplings on shaft and check distance using feeler gauges between drive lug on one half and space between on other coupling half. Rotate coupling and check gap at a minimum of 3 other coupling positions. The difference between any two readings should be within specifications below.

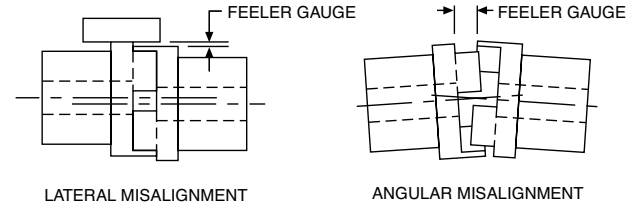

Misalignment Tolerances

Coupling Series	Lateral	Angular
FC - Bronze Insert	.001	See Chart Below
FC - Urethane Insert	.002	
FC - Rubber Insert	.002	

FC Series ANGULAR MISALIGNMENT

Chart reflects maximum angular misalignment of 1-1/2° for rubber, 1° for urethane and 1/2° for bronze.

Maximum Reading Differential

Size	Rubber	Insert Urethane	Bronze
FC12	.033	.022	.011
FC15	.039	.026	.013
FC20	.053	.035	.018
FC25	.066	.044	.022
FC30	.078	.052	.026
FC38	.097	.065	.032
FC45	.117	.078	.039

Performance & Selection

Boston Gear precision machined JS Series Universal Joints are designed for connecting shafts at angles up to 30 degrees and speeds up to 2000 RPM. All sizes are stocked with both solid and bored hubs.



Selection

Torque ratings may be calculated from data in tables. The tables indicate the Rated Static Torque (Lb. Ins.) and Speed-Angle factors suggested for various operating conditions.

The approximate service torque rating of a particular joint is obtained by dividing the Rated Static Torque by the appropriate Speed-Angle factor.

Selecting a universal to satisfy a specified torque requirement is also made convenient with the data provided.

The designated torque load should be multiplied by the appropriate Speed-Angle factor to obtain an equivalent static torque load.

A universal with a rated static torque equal to or greater than the calculated torque load would then be selected.

Example:

A pair of universal joints are desired to transmit 1/2 HP from one shaft running at 500 RPM to another located at an angle of 10 degrees (from a straight line).

The joints will be connected by an intermediate shaft and arranged to operate at equal angles of 5 degrees.

A Speed-Angle factor of 9 is indicated in the table for an operating angle of 5 degrees and a speed of 500 RPM.

$$\text{Torque Load} = \frac{63025 \times \text{HP}}{\text{RPM}} = \frac{63025 \times 1/2}{500} = 63 \text{ Lb. Ins.}$$

JS175 size stainless steel universals would be suggested for this application.

Speed-Angle Factors

Speed in RPM	Operating Angle - Degrees (Deviation From Straight Line)														
	0	1/2	1	2	3	4	5	6	8	10	12	15	20	25	30
2000	21	22	23.2	25.2	27.4	29.4	31.6	—	—	—	—	—	—	—	—
1800	19	20	21.0	22.8	24.8	26.6	28.6	30.4	—	—	—	—	—	—	—
1600	17	17.8	18.8	20.4	22.2	23.8	25.6	27.2	—	—	—	—	—	—	—
1400	15	15.8	16.6	18.0	19.6	21.0	22.6	24.0	27	—	—	—	—	—	—
1200	13	13.6	14.4	15.6	17.0	18.2	19.6	20.8	23.4	—	—	—	—	—	—
1000	11	11.6	12.2	13.2	14.4	15.4	16.6	17.6	19.8	22	—	—	—	—	—
900	10	10.6	11.0	12.0	13.0	14.0	15.0	16.0	18.0	20	22	—	—	—	—
800	9.0	9.4	10.0	10.8	11.8	12.6	13.6	14.4	16.2	18	19.8	—	—	—	—
700	8.0	8.4	8.8	9.6	10.4	11.2	12.0	12.8	14.4	16	17.6	20	—	—	—
600	7.0	7.4	7.8	8.4	9.2	9.8	10.6	11.2	12.6	14	15.4	17.6	—	—	—
500	6.0	6.4	6.6	7.2	7.8	8.4	9.0	9.6	10.8	12	13.2	15.0	18	—	—
400	5.0	5.2	5.6	6.0	6.6	7.0	7.6	8.0	9.0	10	11.0	12.6	15	17.6	—
300	4.0	4.2	4.4	4.8	5.2	5.6	6.0	6.4	7.2	8.0	8.8	10.0	12	14.0	16
200	3.0	3.2	3.4	3.6	4.0	4.2	4.6	4.8	5.4	6.0	6.6	7.6	9.0	10.6	12
100	2.0	2.2	2.2	2.4	2.6	2.8	3.0	3.2	3.6	4.0	4.4	5.0	6.0	7.0	8.0
50	1.5	1.6	1.7	1.8	2.0	2.2	2.2	2.4	2.8	3.0	3.4	3.8	4.6	5.2	6.0
25	1.3	1.3	1.4	1.5	1.6	1.8	1.9	2.0	2.2	2.6	2.8	3.2	3.8	4.4	5.0
10	1.1	1.2	1.2	1.3	1.4	1.5	1.7	1.8	2.0	2.2	2.4	2.8	3.4	3.8	4.4
0	1.0	1.1	1.1	1.2	1.3	1.4	1.5	1.6	1.8	2.0	2.2	2.6	3.0	3.6	4.0

Rated Static Torque (Lb. Ins.)

Stainless Steel Universal Joints


Catalog Number	JS37	JS50	JS62	JS75	JS87	JS100	JS112	JS125	JS150	JS175	JS200	JS250	JS300	JS400
Torque – Lb. Ins.	6	24	50	96	110	180	200	310	500	750	1320	1900	3100	7360

Dimensions

Pin and Block Type; Stainless Steel

Standard Tolerances

Dimensions		Tolerance
Bore	All	±.001
Hub Dia.	All	±.020
Bore Length	All	±1/64
Overall Length	1-3/4 - 4-1/4 5 - 10-5/8	±1/64 ±1/32

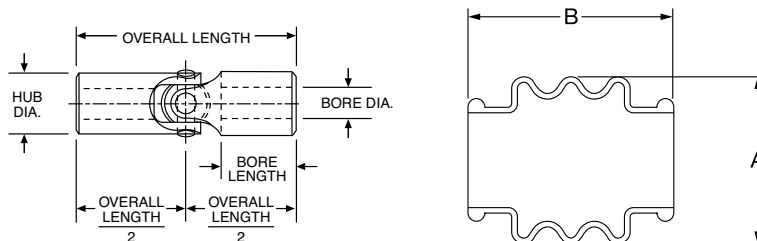

All Dimensions in Inches
Order By Catalog Number or Item Code

Stainless Steel		Universal Joints					Boot Kits† ††			
Catalog Number	Item Code	Bore**	Bore Length*	Hub Dia.	Overall Length	Approx. Weight Lbs.	A	B	Catalog Number	Item Code
JS37B	08472	3/16	11/16	3/8	1-3/4	.04	0.72	0.88	UB37	47602
JS37	08452	-	-	3/8	1-3/4	.05				
JS50B	08474	1/4	3/4	1/2	2	.08	0.95	0.88	UB50	47603
JS50	08454	-	-	1/2	2	.10				
JS62B	08476	5/16	13/16	5/8	2-1/4	.14	1.13	1.03	UB62	47604
JS62	08456	-	-	5/8	2-1/4	.18				
JS75B	08478	3/8	31/32	3/4	2-11/16	.24	1.38	1.25	UB75	47605
JS75	08458	-	-	3/4	2-11/16	.30				
JS87B	08480	7/16	1-1/32	7/8	3	.31	1.50	1.38	UB87	47606
JS87	08460	-	-	7/8	3	.45				
JS100B	08482	1/2	1-3/16	1	3-3/8	.50	1.50	1.50	UB100	47607
JS100	08462	-	-	1	3-3/8	.66				
JS112B	72483	9/16	1-7/32	1-1/8	3-1/2	.69	1.75	1.63	UB112	72491
JS112	72484	-	-	1-1/8	3-1/2	.88				
JS125B	08484	5/8	1-1/4	1-1/4	3-3/4	.88	1.88	2.09	UB125	47608
JS125	08464	-	-	1-1/4	3-3/4	1.15				
JS150B	08486	3/4	1-11/32	1-1/2	4-1/4	1.44	2.25	2.06	UB150	47609
JS150	08466	-	-	1-1/2	4-1/4	1.81				
JS175B	08488	7/8	1-9/16	1-3/4	5	2.31	2.69	2.63	UB175	47610
JS175	08468	-	-	1-3/4	5	2.86				
JS200B	08490	1	1-5/8	2	5-7/16	3.31	2.69	3.00	UB200	47611
JS200	08470	-	-	2	5-7/16	4.06				
JS250B	72485	1-1/4	2-3/32	2-1/2	7	6.81	3.50	4.00	UB250	47612
JS250	72486	-	-	2-1/2	7	8.25				
JS300B	72487	1-1/2	2-27/32	3	9	12.5	4.25	4.63	UB300	47613
JS300	72488	-	-	3	9	15.25				
JS400B	72489	2	3-1/8	4	10-5/8	25.8	6.00	5.50	UB400	47614
JS400	72490	-	-	4	10-5/8	31.3				

*Approximate Hub Projection

†Each Kit contains (2) Boots and (4) Ties together with complete instructions for installation and lubrication.

**Style B includes bore only. Units without a B letter have a solid bore.

†† Assemble the boot to be positioned central to the joint.


The shape of the boot may vary from the image shown above.

F JS Series Stainless Steel Universal Joints


Installation & Maintenance

Mounting

A single universal joint (rotating at uniform speed) operating at an angle will introduce periodic variations of angular velocity to the driven shaft. These cyclic speed fluctuations (two per revolution) cause vibration, higher shaft stresses and bearing loads which will be more severe with larger angles of operation.

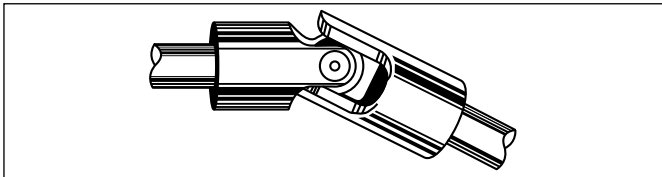

The detrimental effects of these rotational deviations can be reduced, and uniform speed restored by using two joints (and an intermediate shaft) to connect shafts at an angle or misaligned in a parallel direction.

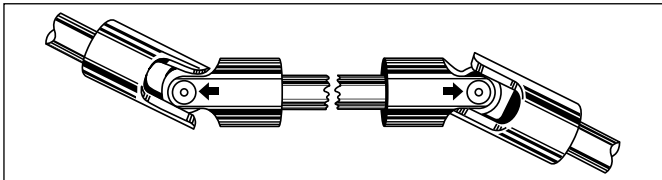

For connecting shafts in the same plane the joints should be arranged to operate at equal angles and with the bearing pins of the yokes on the intermediate shaft in line with each other.

Lubrication

PIN and BLOCK TYPE

These universal joints are not lubricated when shipped.


Many applications are considered severe when in harsh environments and when a combination of speed, dirt contamination and inaccessible locations make it impractical to maintain proper lubrication.

It is in these instances when the Boot Kits become a desirable alternative. For satisfactory performance, all booted joints should be used with a LITH-EP-000 grease for an ambient temperature range of 40° to 225°F.

Volume of Lubrication for Booted Joints

Size	Volume (Ozs.)	Size	Volume (Ozs.)	Size	Volume (Ozs.)
37	.4	100	2.0	250	25.0
50	.5	125	3.5	300	30.0
62	.75	150	4.5	400	50.1
75	1.0	175	7.0		
87	1.5	200	15.0		

NOTE: Joints should be initially lubricated with a 90 weight oil before being packed with grease.

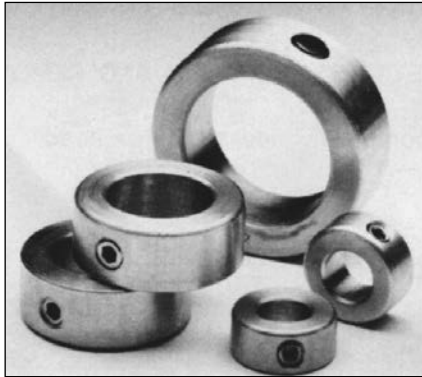


Stainless Steel Bore Sizes from 1/8" to 2"

Stainless Steel Collars are Corrosion-Resistant and Non-Magnetic suitable for temperatures up to 800°F. Ideal for applications requiring hygienic cleanliness.

All Collars Complete with Standard Hollow Point Setscrews.

All Dimensions in Inches Order By Catalog Number or Item Code

Bore	Outside Diameter	Width	Stainless Steel	
			Catalog Number	Item Code
1/8	3/8	1/4	SSC12	67740
3/16	7/16	1/4	SSC18	67741
1/4	1/2	5/16	SSC25	67742
5/16	5/8	11/32	SSC31	67743
3/8	3/4	3/8	SSC37	67744
1/2	1	7/16	SSC50	67745
5/8	1-1/8	1/2	SSC62	67746
3/4	1-1/4	9/16	SSC75	67747
7/8	1-1/2	9/16	SSC87	67748
1	1-1/2	5/8	SSC100	67749
1-1/8	1-3/4	5/8	SSC112	67784
1-1/4	2	11/16	SSC125	67785
1-1/2	2-1/4	3/4	SSC150	67788
1-3/4	2-5/8	7/8	SSC175	67789
2	3	7/8	SSC200	67790

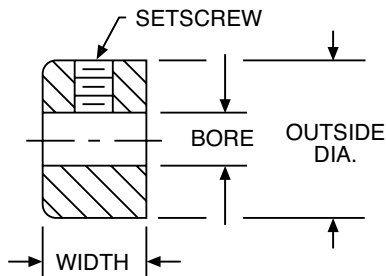


Standard Tolerances

Dimensions		Tolerance
Bore	1/8-1	-.001/ + .003
	1-1/8-2	-.001/ + .004

Materials

Stainless Steel—Type 303 Austenitic.


Smooth Bore

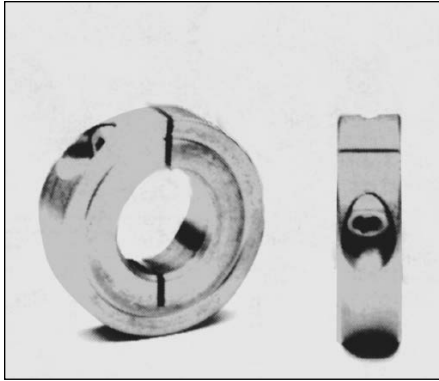

Design Provides Convenient Setting, Adjusting and Removal prevents shaft damage.

OSHA Conformance collars have completely recessed screw head.

Bore From 1/8" to 2"

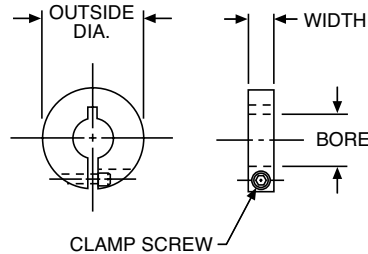

All Dimensions in Inches
Order By Catalog Number or Item Code

Bore	O.D.	Width	Clamp Screws	Stainless Steel	
				Catalog Number	Item Code
1/8	13/16	1/4	4-40	CSSC12	49094
3/16				CSSC18	49095
1/4				CSSC25	49096
5/16				CSSC31	49097
3/8	1-1/16	5/16	6-32	CSSC37	49098
7/16				CSSC43	49099
1/2	1-1/4	3/8	8-32	CSSC50	49100
9/16				CSSC56	49101
5/8	1-1/2	13/32	10-32	CSSC62	49102
3/4	1-3/4			CSSC75	49104
7/8	1-7/8			CSSC87	49106
15/16				CSSC93	49107
1	2			CSSC100	49108
1-1/16				CSSC106	49109
1-1/8	2-1/8	1/2	1/4-28	CSSC112	49110
1-3/16				CSSC118	49111
1-5/16	2-3/8			CSSC143	49115
1-1/2	2-1/2			CSSC150	49116
1-15/16	3-1/4	5/8	5/16-24	CSSC193	49123
2				CSSC200	49124

Dimension in Inches

Bore	Axial Load Capacity (Lbs.)	Screw Size	Recommended Screw Torque (Lb. Ins.)	
			Steel	Stainless Steel
1/8-5/16	400	4-40	20	16
3/8-7/16	600	6-32	30	24
1/2-9/16	1400	8-32	55	35
5/8	1800	10-32	90	72
3/4-1-1/2	4000	1/4-28	220	170
1-15/16-2	6500	5/16-24	435	340

Materials

Stainless—Type 303 Austenitic

Load Data

Capacity is based on a standard steel, one-piece collar mounted with recommended screw torque on a lightly oiled shaft. Capacity is load to move collar .010". Data shown is for guidance only. In applications involving control of axial loads, capacity should be determined experimentally on actual parts involved.

Standard Tolerances

Dimensions		Tolerance
Bore	All	-.000 / +.003

Threaded Bore



Order By Catalog Number or Item Code

Bore	O.D.	Width	Clamp Screws	Stainless Steel	
				Catalog Number	Item Code
1/4-20	13/16	1/4	4-40	CSSC25-20	49265
3/8-16	1-1/16	5/16	6-32	CSSC37-16	49269
3/8-24				CSSC37-24	49270
1/2-13	1-1/4	3/8	8-32	CSSC50-13	49271
1/2-20				CSSC50-20	49272
5/8-11	1-1/2	13/32	10-32	CSSC62-11	49273
5/8-18				CSSC62-18	49274
3/4-10	1-3/4	1/2	1/4-28	CSSC75-10	49275
3/4-16				CSSC75-16	49276
1-8	2	1/2	1/4-28	CSSC100-8	49279
1-14				CSSC100-14	49280
1-1/4-12	2-1/4	1/2	1/4-28	CSSC125-12	49284

Materials

Stainless—Type 303 Austenitic

Bore Threads
From 1/4-20UNC To
1-1/4 - 12UNC

2SSC Series Stainless Steel Clamping Collars (2-Piece)

F


Design Provides Convenient Setting, Adjusting And Removal
prevents shaft damage.

OSHA Conformance collars have completely recessed screw head.

Bores From 1/4" To 2"

All Dimensions in Inches
Order By Catalog Number or Item Code

Bore	O.D.	Width	Clamp Screws	Stainless Steel	
				Catalog Number	Item Code
1/4	13/16	1/4	4-40	2SSC25	49190
5/16				2SSC31	49191
3/8	1-1/16	5/16	6-32	2SSC37	49192
7/16				2SSC43	49193
1/2	1-1/4	3/8	8-32	2SSC50	49194
9/16				2SSC56	49195
5/8	1-1/2	13/32	10-32	2SSC62	49196
11/16				2SSC68	49197
3/4	1-3/4	1/2	1/4-28	2SSC75	49198
7/8	1-7/8			2SSC87	49200
1	2			2SSC100	49202
1-1/16				2SSC106	49203
1-1/8	2-1/8			2SSC112	49204
1-3/16				2SSC118	49205
1-1/4	2-1/4			2SSC125	49206
1-5/16				2SSC131	49207
1-7/16	2-3/8			2SSC143	49209
1-1/2	2-1/2			2SSC150	49210
1-7/8	3-1/4	5/8	5/16-24	2SSC187	49216
1-15/16				2SSC193	49217
2				2SSC200	49218



Standard Tolerances

Dimensions		Tolerance
Bore	All	-.000 / + .003

Materials

Stainless—Type 303 Austenitic

Load Data


Capacity is based on a standard, one-piece collar mounted with recommended screw torque on a lightly oiled shaft. Capacity is load to move collar .010".

Data shown is for guidance only. In applications involving control of axial loads, capacity should be determined experimentally on actual parts involved.

Dimension in Inches

Bore	Axial Load Capacity (Lbs.)	Screw Size	Recommended Screw Torque (Lb. Ins.)
			Stainless Steel
1/4-5/16	400	4-40	16
3/8-7/16	600	6-32	24
1/2-9/16	1400	8-32	35
5/8-11/16	1800	10-32	72
3/4-1-1/2	4000	1/4-28	170
1-7/8-2	6500	5/16-24	340

Thrust Washer Only

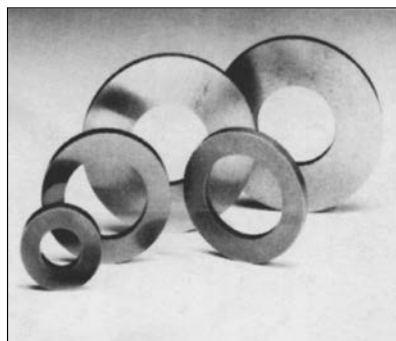
**Hardened and Ground Stainless Steel Bore Sizes
From 3/16" to 1/2"**

**All Dimensions in Inches
Order By Catalog Number or Item Code**

Bore	O.D.	Thickness	Catalog Number
Stainless Steel†			
3/16	7/16	1/16	06760
1/4	9/16	1/16	06762
5/16	5/8	5/64	06764
3/8	11/16	3/32	06766
1/2	7/8	1/8	06770

†These washers also listed with SAO Bearings.

Standard Tolerances

Dimensions	Tolerance
Bore	+ .0015 + .0070
O.D.	+ .000 - .005
Thickness	+ .000 - .005

Thrust Washers & Thrust Ball Bearing


Hardened Stainless Steel — SAO Series

For Light Loads

High Quality Hardened Steel Balls, retained in a nylon cage.

Hardened Thrust Washers, are ground both sides to provide smooth, flat, parallel ball raceway surfaces.

Quality and Number Of Balls assure high load carrying capacity.

Nylon Retainer assures minimum frictional losses.

Standard Tolerances


Dimensions		Tolerance
A*	All	+ .002 + .007
B	All	+ .000 - .005
C	All	+ .000 - .010

*SAO 16 +.002 to +.010

Load Data

The indicated load ratings are based on 2500 hours average life (L_{50}). To determine the load ratings at 3500 and 5000 hours, 90 percent and 80 percent respectively, of the above ratings should be used.

Basic Bearing Number	Thrust Capacity (lbs.)			
	Revolutions Per Minute			
	50	100	500	1000
SAO1	30	25	14	11
SAO5	64	56	31	25
SAO8	68	60	34	27
SAO10	85	72	42	32
SAO16	250	125	70	58



**All Dimensions in inches
Order by Item Code (2 Washers and 1 Nylon Cage)**

A	B	C	Balls		Basic Bearing Number	SAO Series Stainless Steel	
			Number	Diameter		Washer	Nylon Cage
3/16	7/16	3/16	9	1/16	SAO1	06760	56813
1/4	9/16	7/32	10	3/32	SAO5	06762	56814
5/16	5/8	1/4	10	3/32	SAO8	06764	56815
3/8	11/16	9/32	12	3/32	SAO10	06766	56816
1/2	7/8	3/8	10	1/8	SAO16	06770	56818

BOSTON GEAR AND BAUER GEAR MOTOR PROVIDE POWER TRANSMISSION SOLUTIONS FOR THE FOOD AND BEVERAGE INDUSTRY

Tightened federal regulations regarding food safety and hygiene in food processing and beverage industries has led producers to continue to adapt their equipment to meet those changing requirements.

The areas in production facilities where drive systems are located are often the areas that have the most stringent requirements for hygiene and sanitation, due to their proximity to the food product. The key to food safety is prevention of microbial contamination and bacteria growth. Equipment in these areas needs to be resistant to alkali or acid based cleaning agents and disinfectants.



For installations where the drive system is located at or above the food product, there is a higher risk of product contamination due to rigorous cleaning standards. For these installations special attention must be given to drive design & materials, so that bacterial growth on surfaces will be avoided. Drive systems with the most extreme protection are often utilized in these applications. Stainless steel exterior materials, rounded edges, domed crowns, and enhanced sealing are critical design features that will ensure long equipment life, the sustainability of your process and the safety of your product.

Some producers use highly caustic wash down solutions; others use high-pressure hot water. Equipment can also be exposed to process by-products such as sugar, seasonings, brines, or animal blood. Whatever challenges the integrity of your drive system, Regal Rexnord has a solution for you. The family of gearing & motor products manufactured by Boston Gear and Bauer Gear Motor provide the level of protection needed for the harsh elements increasingly used in the prevention of microbial contamination and bacterial growth in hygiene sensitive environments.

www.BostonGear.com



*Scan to visit
the Food and
Beverage
Website*



*Scan to visit
Boston Gear's
Stainless Steel
Website*



*Scan to visit
Bauer Gear
Motor's
HiflexDRIVE
Product Page*



Regal Rexnord

Customer Service: 1-888-999-9860

Application Support: 1-800-816-5608

bostongear.com

regalrexnord.com

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale>.

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity.

Regal Rexnord and Boston Gear are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2022, 2024 Regal Rexnord Corporation, All Rights Reserved.

MCC-P-1998-BG-EN-US 8/24

