

I N T R O D U C I N G

Dynatork Service Kits

The Dynatork Air motor piston is designed for easy maintenance. The life of the motor can be extended almost indefinitely by changing the pistons and seals at regular service intervals. The service kit contains a set of pistons and liners.


Fitting procedure

- Remove back flange.
- Remove all three piston caps.
- Push out Pistons and liners and ensure old O ring is removed.
- Check for any debris before fitting new pistons.
- Fit new Liners, Pistons and O rings assembly, ensuring piston slides when fitted.
- Refit Piston Caps.
- Refit Flange plate.
- Test run motor.

Order Codes

Lubricated	Non-Lubricated
909.10	909.15
909.30	909.35
909.70M	909.75M

Note: Due to design change size 7 Dynatork Pistons are now longer, if you have an older unit the new pistons can be fitted except on 900.70.B and 900.75.B types where the older shorter pistons are still available [order codes 909.70 & 909.75].

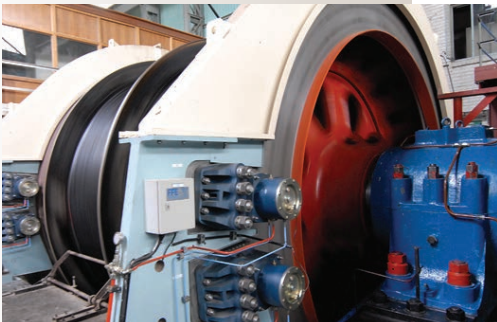

www.huco.com

701 Carrier Drive
Charlotte, NC 28216 - USA
704-588-5610
Fax: 704-588-7181

Merchant Drive, Hertford
Hertfordshire, SG13 7BL, England
+44 (0)1992 501900
Fax: +44 (0)1992 500035