


Roto-Cam® Clutch C4 Series Sizes 30 thru 55

Installation & Maintenance Manual

P-5053-TBW
Form 1358

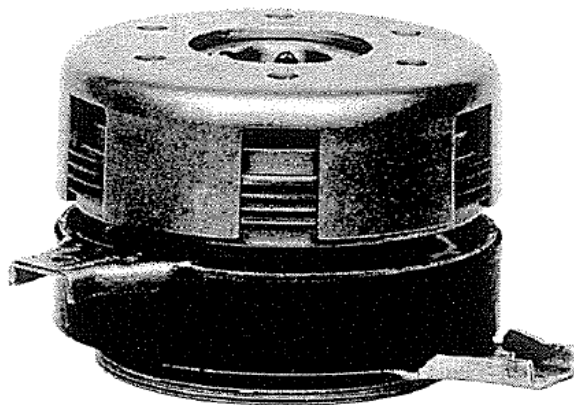

WARNING:

Rotating equipment must be properly guarded.

It is the responsibility of the user to properly guard all rotating equipment to comply with OSHA or any applicable regulations. Failure to properly guard may contribute to severe injury should someone come in contact with the rotating parts or should the rotating part fail.

WARNING:

DO NOT use Wood's products on any primary aircraft drive or any other drive which could endanger human life should a drive component fail.

Roto-Cam® Mechanical Clutches

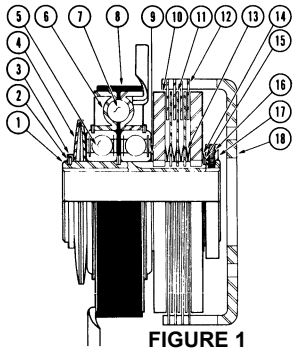


FIGURE 1

- | | | |
|------------------------|-------------------------|-----------------------|
| (1) hub | (7) cam ball (3) | (13) separator spring |
| (2) snap ring | (8) cam cover** | (14) shim (as needed) |
| (3) snap ring retainer | (9) spacer | (15) snap ring |
| (4) load spring (2) | (10) press. plate (2) | (16) set screw (2) |
| (5) bearing* | (11) separator disc (3) | (17) collar |
| (6) cam assembly (2) | (12) friction disc (4) | (18) drive cup |

*Model C4 DRY – sealed bearings; Model C4 WET – open bearings

**Models C4 DRY – omitted on C4 WET models

How Roto-Cam® Clutches Operate

Three hardened steel balls (7), rolling in tear-drop shaped tracks in the steel cams (6) convert rotary engaging effort into axial thrust on ball bearings (5). As hand lever control is moved toward the engage position, steel balls roll toward narrow end of their respective cam tracks. Axial motion generated compresses load springs (4) and forces pressure plate (10), which is driven by the hub (1), forward. The disc pack (11 & 12) between the two pressure plates is compressed, transmitting torque from input (pressure plates and separator discs) to output (friction discs). External lugs on the friction discs in turn transmit torque to drive cup and load through matching slots in the cup. Separator springs (13) assure fast, positive release when clutch is disengaged.




FIGURE 2

Installation

- When installing or removing ROTO-CAM clutches, apply pressure on the **CLUTCH HUB** only. Do not pound or pry under any circumstances.
- The ROTO-CAM clutch hub is driven from the shaft through a square key (not furnished). The clutch is located on, and secured to the shaft by two set screws (16). Recommended torque on these screws is:

Model C430	21 lb-in
Model C440 & Larger	65 lb-in
- When installing ROTO-CAM clutches, the actuating cleat which is anchored must be free to float on its restraint, both axially and radially. This will prevent eccentric loads from being imposed on the cam bearings. Since the cams move apart during actuation, both cleats must float axially to avoid binding or cocking.
- To provide long life for friction disc lugs and drive cup slots, be sure clutch and drive cups are accurately aligned. *Maximum allowable for both angular and parallel, or offset, misalignment is .005 inches T.I.R.*
- Drive cup must not be supported on the friction discs. Be sure load attached to drive cup is bearing supported and properly aligned, as shown in drawings.




FIGURE 3

Maintenance

- No mechanical adjustments are required during the life of the lining. Load springs (4) automatically adjust the ROTO-CAM clutch to compensate for wear of the friction lining on the pressure plate assembly.
- Type 4 ROTO-CAM clutches may be used in dry or wet (in-oil) applications. For *dry* applications (Model C4 DRY), ball bearings (5) are grease packed for life and sealed to prevent entry of contaminants. No maintenance is required. In dry applications, the area between the cams and bearings is protected from contamination by flexible cam cover (8). However, since the cam bearings must slide on the hub, excessive contamination must be avoided to prevent build-up which would keep the bearings from moving freely.
- For wet applications (Model C4 WET), ball bearings (5) are open and neoprene cam cover (8) is omitted to permit free flow of lubricant through the clutch. Clutch lubrication must be supplied by the transmission lubricant.
- Kits to rebuild ROTO-CAM clutches in the field are available. Ordering and installation instructions are listed below.

How to Select and Order the ROTO-CAM Rebuild Kits:

ROTO-CAM Rebuild Kits can be easily ordered by specifying the proper kit number.

CLUTCH	KIT PART NUMBER
C430	C430K
C440	C440K
C445	C445K
C455	C455K

Note: Rebuild Kits may be obtained from your local Wood's distributor. Kits include the pressure plates (10), separator springs (11), shims (14), and snap ring (15). If other parts are required, a new clutch should be purchased, as rebuilding becomes impractical.

Rebuilding

Disassembly

- 1) After removing drive cup (18), loosen two set screws (16) and remove collar (17).
- 2) Compress disc pack slightly and remove snap ring (15) and shims (14).
- 3) Remove outboard pressure plate (10), discs (11 & 12), separator springs (13) and inboard pressure plate (10) from clutch hub.

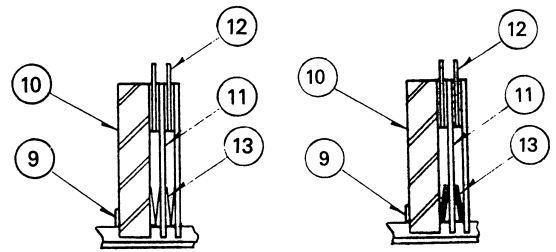


FIGURE 6
MODEL 30, 45 & 55

FIGURE 7
MODEL 40 ONLY

Assembly

- 1) Reinstall inboard pressure plate.
- 2) Install new friction disc (12) and two separator springs (13) as shown in Figure 6 or 7.
- 3) Install separator disc (11) against separator springs.
- 4) Repeat steps 2 & 3 above until all new discs and springs are installed. Be sure pressure plate and all separator discs can slide freely on hub splines.
- 5) After last friction disc and two separator springs are assembled, install outboard pressure plate.
- 6) Compress disc pack and install snap ring.


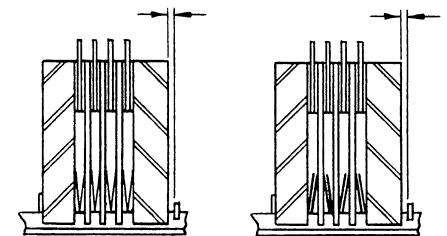


FIGURE 8
MODEL 30, 45 & 55

FIGURE 9
MODEL 40 ONLY

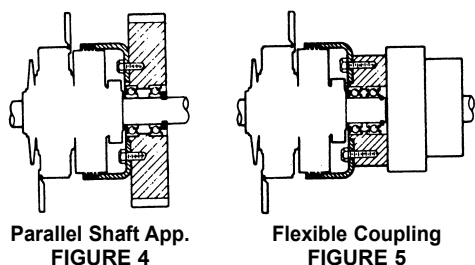

Parallel Shaft App.
FIGURE 4

Flexible Coupling
FIGURE 5

- 7) With disc pack compressed solid, measure distance between outboard pressure plate and snap ring with a feeler gauge. *Proper clearance is .040 to .050.* If clearance exceeds this value, reduce by adding shims (furnished) between snap ring and pressure plate until proper clearance is obtained. All friction discs must move freely in a properly adjusted assembly. Figure 8 or 9.
- 8) Install collar (17), locate clutch on shaft and torque set screws (16).

All Customer Service phone numbers shown in bold

Belted Drives and Sheaves

TB Wood's

Belted Drives

Chambersburg, PA - USA
1-888-829-6637 – Press #5

For application assistance:
1-888-829-6637 – Press #7

Couplings

Ameridrives

*Mill Spindles, Ameriflex,
 Ameridisc*

Erie, PA - USA
1-814-480-5000

Gear Couplings

San Marcos, TX - USA
1-800-458-0887

*Universal Joints, Drive Shafts,
 Mill Gear Couplings*

Erie, PA - USA
1-920-593-2444

Bibby Turboflex

*Disc, Gear, Grid Couplings,
 Overload Clutches*

Dewsbury, England
+44 (0) 1924 460801

Boksburg, South Africa
+27(0) 11 918 4270

Guardian Couplings

*Engineered Flywheel Couplings,
 Engine Housings and Pump Mounts,
 Flexible Shaft Couplings*

Michigan City, IN - USA
1-219-874-5248

Huco

*Precision Couplings and
 Air Motors*

Hertford, England
+44 (0) 1992 501900

Chambersburg, PA - USA
1-888-829-6637

Lamiflex Couplings

*Flexible Couplings, Bearing
 Isolators, and Coupling Guards*

Cotia, SP - Brasil
+55 (11) 4615-6300

Couplings Cont.

TB Wood's

Elastomeric Couplings

Chambersburg, PA - USA
1-888-829-6637 – Press #5

For application assistance:
1-888-829-6637 – Press #7

General Purpose Disc Couplings

San Marcos, TX - USA
1-888-449-9439

Electromagnetic Clutches and Brakes

Inertia Dynamics

*Spring Set Brakes; Power On and
 Wrap Spring Clutch/Brakes*

New Hartford, CT - USA
1-800-800-6445

Matrix

*Electromagnetic Clutches
 and Brakes, Pressure Operated
 Clutches and Brakes*

Brechin, Scotland
+44 (0) 1356 602000

New Hartford, CT - USA
1-800-825-6544

Warner Electric

*Electromagnetic Clutches
 and Brakes*

New Hartford, CT - USA
1-800-825-6544

For application assistance:
1-800-825-9050

Saint Barthélemy d'Anjou, France
+33 (0)2 41 21 24 24

*Precision Electric Coils and
 Electromagnetic Clutches and
 Brakes*

Columbia City, IN - USA
1-260-244-6183

Engineered Bearing Assemblies

Kilian

*Engineered Bearing
 Assemblies*

Syracuse, NY - USA
1-315-432-0700

Gearing

Bauer Gear Motor

Gearred Motors

Esslingen, Germany
+49 (711) 3518-0

Middlesex, NJ - USA
1-732-469-8770

Boston Gear

*Enclosed and Open Gearing,
 Electrical and Mechanical
 P.T. Components*

Charlotte, NC - USA
1-800-825-6544

For application assistance:
1-800-816-5608

Nuttall Gear and Delroyd Worm Gear

*Worm Gear and
 Helical Speed Reducers*

Niagara Falls, NY - USA
1-716-298-4100

Heavy Duty Clutches and Brakes

Industrial Clutch

*Pneumatic and Oil Immersed
 Clutches and Brakes*

Waukesha, WI - USA
1-262-547-3357

Svendborg Brakes

*Industrial Brakes and
 Brake Systems*

Vejstrup, Denmark
+45 63 255 255

Twiflex

Caliper Brakes and Thrusters

Wichita Falls, TX - USA
1-844-723-3483

Twickenham, England
+44 (0) 20 8894 1161

Wichita Clutch

*Pneumatic Clutches
 and Brakes*

Wichita Falls, TX - USA
1-800-964-3262

Bedford, England
+44 (0) 1234 350311

Linear Products

Warner Linear

Linear Actuators

New Hartford, CT - USA
1-800-825-6544

For application assistance:
1-800-825-9050

Saint Barthélemy d'Anjou,
 France
+33 (0)2 41 21 24 24

Overrunning Clutches

Formsprag Clutch

*Overrunning Clutches
 and Holdbacks*

Warren, MI - USA
1-800-348-0881 – Press #1

For application assistance:
1-800-348-0881 – Press #2

Marland Clutch

*Roller Ramp and Sprag Type
 Overrunning Clutches
 and Backstops*

Warren, MI - USA
1-800-216-3515

Stieber Clutch

*Overrunning Clutches
 and Holdbacks*

Heidelberg, Germany
+49 (0) 6221-30470

For information concerning our
 sales offices in Asia Pacific
 check our website
www.altramotion.com.cn



www.tbwoods.com

2000 Clovis Barker Road
 San Marcos, TX 78666
 512-353-4000