


STANDARD BRAKE DISCS and HUBS

BRAKE DISCS

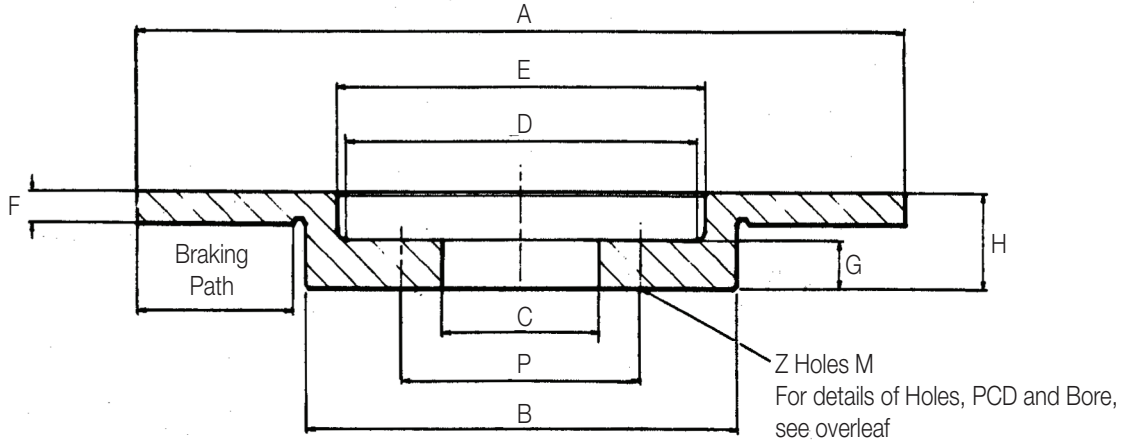

MATERIAL: S.G.IRON
BS2789- SNG420/12
MACHINED ALL OVER

Thickness variation of disc flange: 0.05mm total variation
Surface finish 2mm (0.002mm) = 80 micro-inch or better.

Table 1 Range of 12.7mm thick Brake Discs

Nominal Diameter (mm)	(inch)	Part No.	A	B	C*	D	E	F	G	H	WR2 (kgm ²)	Weight (kg)	Max Safe Disc Speed (rev/min)
300	12	6830259	305	166	51	140	148.0	12.7	12.7	41	0.09	7.3	6000
350	14	6830287	356	210	76	171	184.1	12.7	15.9	54	0.17	10.9	5100
400	16	6830288	406	260	102	222	234.9	12.7	12.7	54	0.28	14.1	4400
460	18	6830080	457	311	102	273	285.7	12.7	15.9	54	0.48	19.1	3900
515	20 1/4	6830005	514	368	102	336	349.2	12.7	15.9	54	0.75	22.7	3500
610	24	6830081	610	464	102	425	438.1	12.7	15.9	54	1.57	33.0	2900
710	28	6830114	711	565	102	527	539.7	12.7	19	54	3.20	52.3	2500
810	32	6830125	813	660	102	593	609.6	12.7	25.4	54	6.57	85.5	2200
915	36	6830395	914	762	102	695	711.2	12.7	25.4	54	10.80	110.9	1900

*Nominal minimum diameters as shown. Bored and drilled to requirements at extra cost.

Table 2 Range of 25.4mm thick Brake Discs

Nominal Diameter (mm)	(inch)	Part No.	A	B	C*	D	E	F	G	H	WR2 (kgm ²)	Weight (kg)	Max Safe Disc Speed (rev/min)
760	30	6830149	762	495	125	431	444.5	25.4	38	76	7.0	104	2300
915	36	6830155	914	648	230	577	596.9	25.4	38	76	16.0	150	1900
1065	42	6830171	1067	800	120	730	749.3	25.4	38	76	29.1	220	1600
1220	48	6830131	1219	914	230	844	863.6	25.4	38	76	49.1	273	1400
1370	54	6830163	1372	1067	-	996	1016.0	25.4	38	76	80.1	346	1200
1525	60	6830164	1524	1219	-	1149	1168.4	25.4	38	76	120.5	393	1100
1830	72	6830177	1829	1524	-	1454	1473.2	25.4	38	76	243.5	522	1000

* Nominal minimum diameters as shown. Bored and Drilled to requirements at extra cost.

Non standard Brake Discs can be supplied to order. Discs 6830163, 6830164 and 6830177 bores cast and machined to order.

Minimum recommended clearance for bolt holes, 0.03mm/cm of PCD

e.g. for a 25cm PCD, clearance = 0.03 x 25 = 0.75mm

Standard Brake Discs and Hubs

BRAKE HUBS

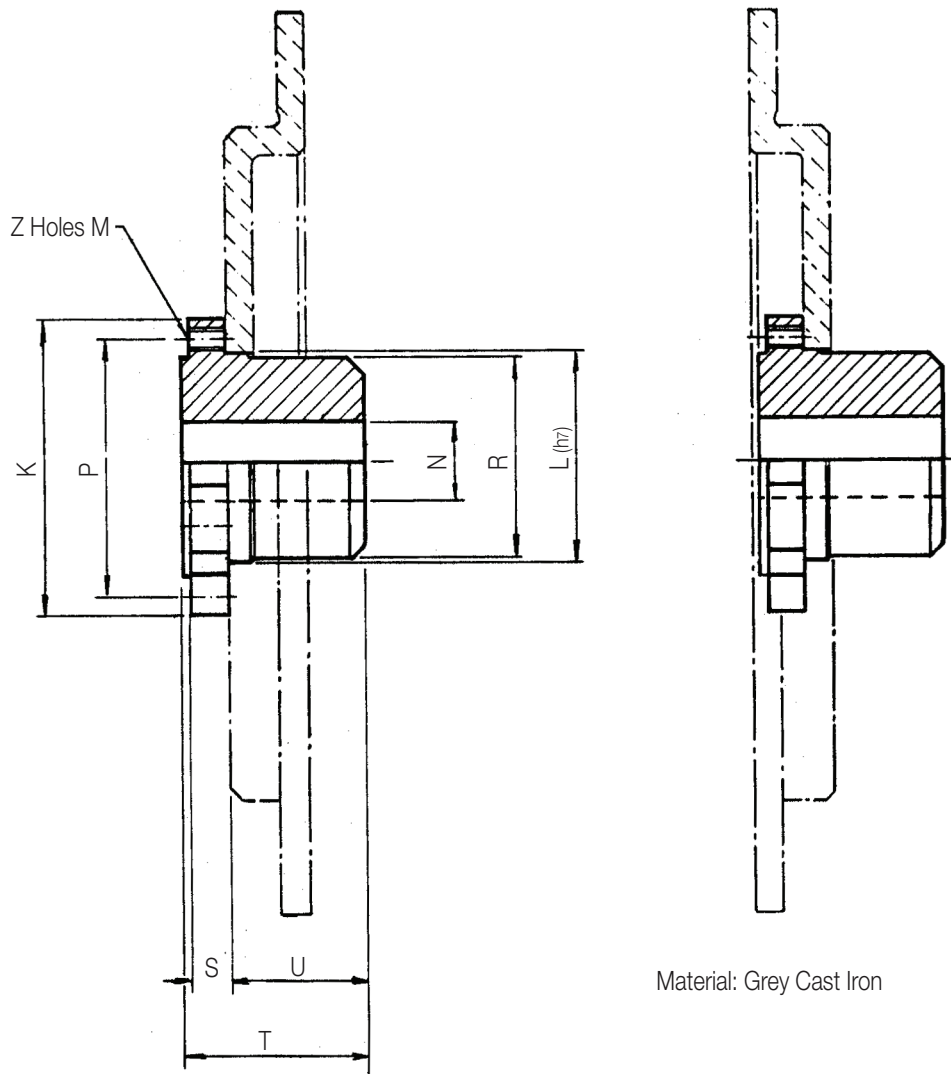


Table 3 Range of Hubs used with Twiflex Brake Disc

Hub Size	Part No.	K	L (h7)	N* from to	P	R	S	T	U	Z	M	Disc Size	Max. Brake Torque (kNm)	WR ² (kgm ²)
112	2650287	99	65	14-42	82	64.5	14	58	42.5	6	M8	250	1.1	0.0097
168	2650288	146	105	28-65	126	104.5	18	87	66.5	8	M10	300 and above	3.6	0.0088
240	2650289	200	147	60-95	175	146	21	117	93.5	10	M12	400 and above	9.5	0.044
330	2650290	272	209	75-130	240	208	27	155	125.5	10	M16	400 and above	24.0	0.23
370	2650291	308	242	90-150	274	241	29	176	143	11	M16	515 and above	30.0	0.35

* Hubs can be supplied with parallel or taper bores, and keywayed to order, at extra cost.

Agent