


Elektro-Magnetische Einscheiben-Bremse


**EUROnorm
Direktantrieb**

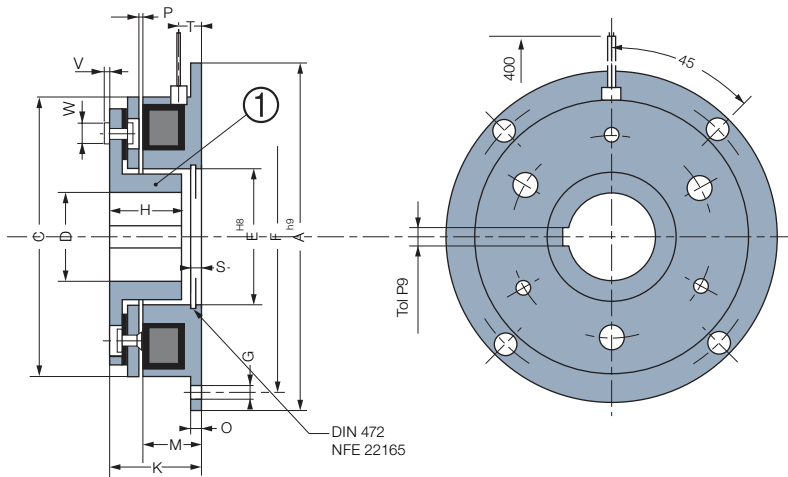

Größe		10	20	40	70	150	250	500
Nom. Drehmoment	[Nm]	7	15	30	60	120	250	500
Max. Drehzahl	[min. ⁻¹]	8000	6000	5000	4000	3000	2500	2000
Leistung	P20 [12/24/103,5V] [W]	9	16,5	21	24	30	43	58
	A	80	100	125	150	190	230	290
	C	63	81	100	125	160	200	250
	D min	10H8	10H8	14H8	14H7	20H7	25H7	25H7
	D std	10/15/17	10/17/20	20/25/30	25/30/35	30/40/45	40/50/60	50/60/80
	D max	17H8	20H8	30H8	35H7	45H7	60H7	80H7
	E	35	42	52	62	80	100	125
	F	72	90	112	137	175	215	270
	G	4xM4	4xM5	4xM6	4xM6	4xM8	4xM8	4xM10
	H	15	20	25	30	38	48	55
	K	25,5	28,5	33	37	42	52,3	62,3
	M	18	20	22	24	26	30	35
	O	2	2,5	3	3,5	4	5	6
	P	0,2	0,2	0,3	0,3	0,3	0,5	0,5
	S	3,5	4,3	5	5,5	6	7	8
	T	6	6,5	9	9,5	10,5	12	12
	V	1,5	2	2,5	3	4	1,5	2,5
	W	6	8	10	12	16	20	24
Maßträgheitsmoment	1 [kgm ²]	0,00006	0,00021	0,00079	0,0020	0,0077	0,0242	0,0705
Gewicht	[kg]	0,4	0,7	1,32	2,32	4,8	9	17,6
Anschluß		Litzen			Kabel			

Stecker Option

(geliefert ohne Kabel)
2 Pole, Kapazität : 0,5/2,5mm²



Passfeder gemäß
ISO/R 773 / BS 4235 / DIN 6885-1 / NF E 22-175, Toleranz P9

