

# E220 VAR 02

## Electro-Magnetic Single Disc Clutch

### Characteristics

- Electrically operated 24 or 103,5 VDC, depending on size
- Single friction face
- Activated by power on
- Expected ball bearing life 50'000 hrs
- Accepts speeds of rotation superior to the series E220 VAR 00

### Utilisation

- Coupling of a pulley or a hub
- From size 3200, we recommend to engage the clutch at a lower speed (about 300 min<sup>-1</sup>)

### Particularities

- No backlash
- For dry use
- No residual torque in disengaged position
- Fixed inductor mounted on ball bearings

### Adjustments

- Airgap "P" should be adjusted at installation
- Does not require wear compensation

### Maintenance Manual


- SM 307

### Mounting Precautions

- Device intended for horizontal use
- The anti-rotation device of the electromagnet shall be inserted in anti rotation slot, with a side play of 0,5 mm and a 1 mm play to the bottom. This avoids a normal stress on the ball-bearings.
- We strongly recommend to mount a damping elastic slot in the anti-rotation device in case of vibrations


### Power Supply

- For sizes until 1600 :  
CBC 400-24 - CBC 450-24  
CBC 500-24 - CBC 550-24  
CBC 140-5 + CBC 140-T
- For size 3200 and up:  
CBC 140-5

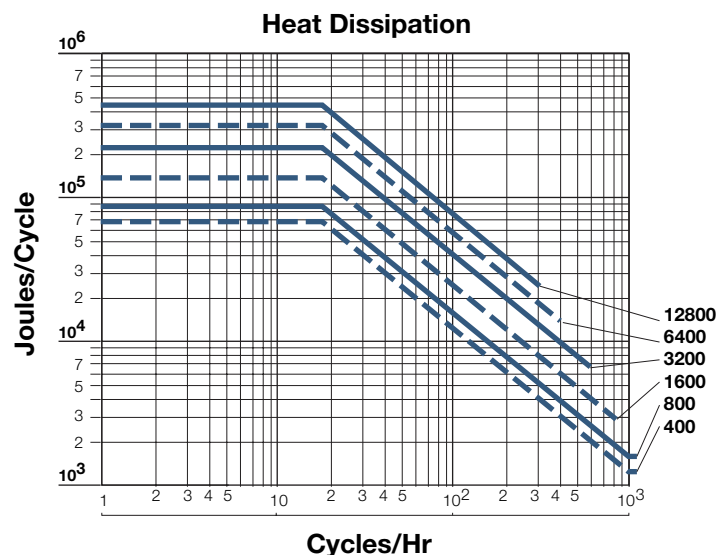

## Electro-Magnetic Single Disc Clutch

**Long Life  
High Speed  
Indirect Drive**

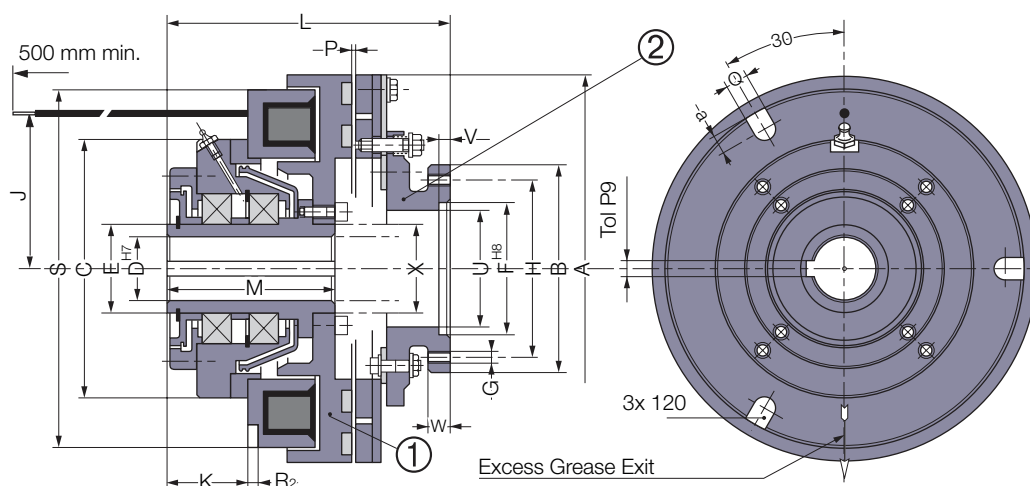


Sizes		400	800	1600	3200	6400	12800	
Nom. Torque	[Nm]	400	800	1600	3200	6400	12800	
Max. Speed	[min. <sup>-1</sup> ]	3000	2500	2200	1800	1500	1500	
Voltage	[VDC]	24	24	24	103,5	103,5	103,5	
Power	P20	[W]	37	47	94	187	336	
	A	260	300	360	450	560	700	
	B	140	155	180	220	295	320	
	C	185	220	260	320	404	480	
	D* min	35	40	50	65	85	100	
	D* max	65	75	90	100	120	130	
	E	80	90	110	130	160	180	
	F	100	115	140	150	180	215	
	G	6xM8	6xM10	8xM12	8xM12	8xM16	12xM20	
	H	120	135	160	195	260	280	
	J	116	133	160	197	248	310	
	K	47	46	68	77	77	96	
	L	161	177	220	250	280	330	
	M	101	107	140	160	175	210	
	P	0,5	0,6	0,8	0,8	1	1	
	Q	16	18	20	20	20	22	
	R2	7	8	10	12	12	12	
	a	10	10	12	15	15	18	
	S	249	287	340	426	528	662	
	U	90	106	126	135	160	197	
	V	5	5	6	7	8	8	
	W	14	15	18	20	25	28	
Washer	X max	80	90	115	132	156	175	
Inertia	①	[kgm <sup>2</sup> ]	0,0635	0,1280	0,3260	0,798	2,749	7,110
Inertia	②	[kgm <sup>2</sup> ]	0,0342	0,0736	0,2042	0,658	1,928	5,595
Weight		[kg]	25,5	35,2	61	122	220	380
Connection			Cable					

### Connector Options

(Delivered without cable)

2 poles, capacity : 0,5/2,5mm<sup>2</sup>



Keyways according to

ISO R773 / BS 4235 / DIN 6885-1 / NF E 22-175, tolerance P9

\* Mandatory delivered with finished bores