



# Enclosed UniModule Clutch/Brake Washdown Series

For Aggressive Food  
Processing Environments



## Long-Lasting Performance For bakeries and snack food applications

Whether you clean your equipment with air, water, or a mild solution, many standard clutch/brakes may not weather the storm. If you want true clutch/brake performance, choose Warner Electric.


Our Enclosed UniModule Clutch/Brake Washdown Series (EUM-W) represents the latest in clean, quiet motion control technology. Designed for use in dusty washdown applications such as those found in the bakery and snack food industries, these packaged clutch/brake units are totally enclosed in sealed, rugged enclosures to keep wear particles in and contaminants out.

Washdown features consist of stainless steel shafts, USDA approved coating, corrosion-resistant fasteners, and special sealing accessories, including optional conduit boxes and integral controls. Available in a wide range of sizes, all units are fully assembled, prealigned and preburnished for true out-of-the-box performance.



An Altra Industrial Motion Company

**EUM-W-1020 Motor Clutch/Brake Combination**

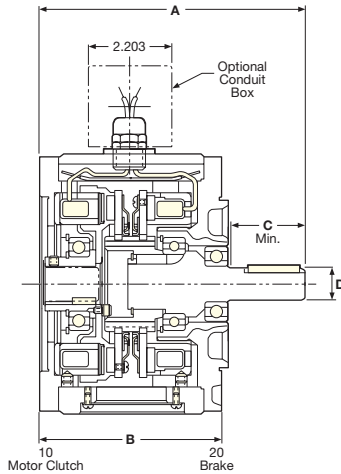

**NEMA C-Face Mounted Units**

**Dimensions (Inches)**

UniModule Size	A	B	C	D	Overall Diameter
50	6.750	4.844	1.813	.625	6.915
100	6.750	4.844	1.890	.625	6.915
180	6.828	4.844	1.890	.875	6.915
210	8.891	5.922	2.500	1.125	10.00
215	9.391	5.922	3.000	1.375	10.00


**Available Options**

- Conduit box • Integral control • Fan kit • Mounting bracket

**Specifications**

UniModule Model No.	Horsepower	Static Torque (lb-ft)	Cycles Per Min Standard (@ 1750 RPM)	Cycles Per Min with Fan (@ 1750 RPM)	NEMA Frame Size	Based on Add on Inertia (lb-ft) <sup>2</sup>
EUM50-1020W	1/4 - 3/4	16	125	185	56C/48Y	.02
EUM100-1020W	1	30	90	140	56C/48Y	.05
EUM180-1020W	1-2	30	90	140	182C/143TC 184C/145TC	.05
EUM210-1020W	3-5	95	37	48	213C/182TC 215C/184TC	.19
EUM215-1020W	7-1/2/10	95	37	48	213TC/215TC	.19

**EUM-W-2030 Input Clutch/Brake Combination**

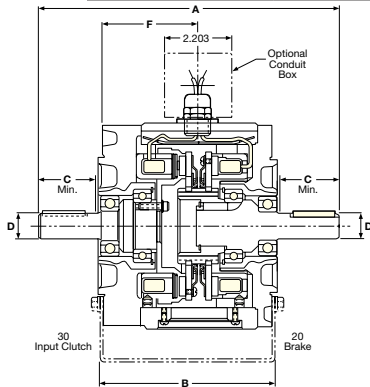

**Base or Foot Mounted Units**

**Dimensions (Inches)**

UniModule Size	A	B	C	D	Overall Diameter
50	9.516	5.672	1.813	.625	6.915
180	9.516	6.672	1.890	.875	6.915
210	12.969	8.260	2.500	1.125	10.00

**Available Options**

- Conduit box • Integral control • Mounting kits

**Specifications**

UniModule Model No.	Horsepower	Static Torque (lb-ft)	Cycles Per Min Standard (@ 1750 RPM)	Cycles Per Min with Fan (@ 1750 RPM)	NEMA Frame Size	Based on Add on Inertia (lb-ft) <sup>2</sup>
EUM50-2030W	1/4 - 3/4	16	125	185	56C/48Y	.02
EUM180-2030W	1-2	30	90	140	182C/143TC 184C/145TC	.05
EUM210-2030W	3-5	95	37	48	213/182TC 215C/184TC	.19



www.warnerelectric.com

449 Gardner Street  
South Beloit, IL 61080 - USA  
815-389-3771  
Fax: 815-389-2582