
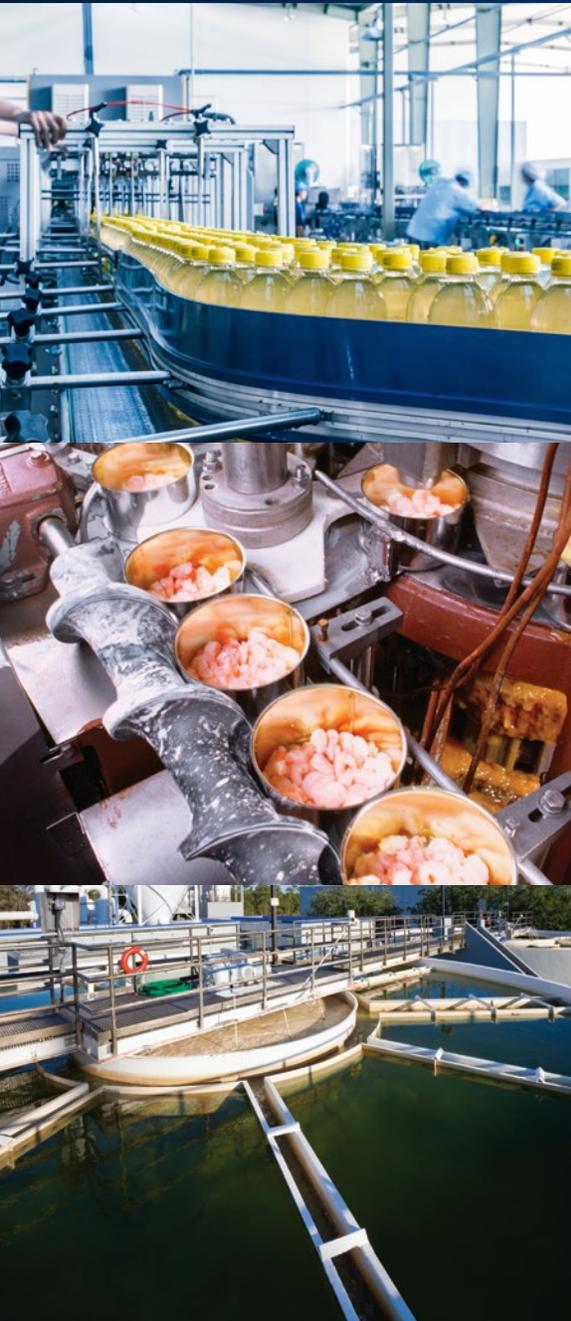


# Worm Geared Motor

SERIES BS

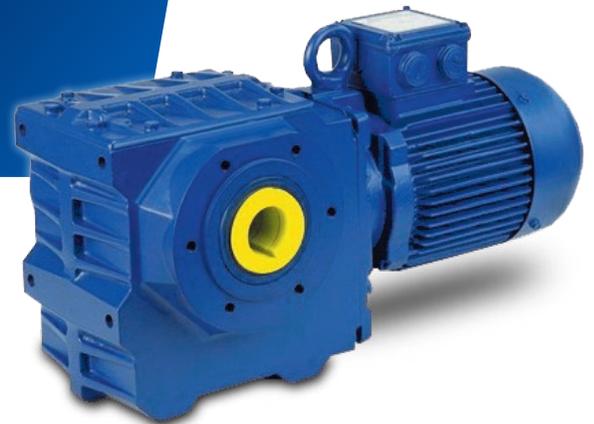

Three-phase worm geared motors for driving machines and equipment of all types

## SPACE-SAVING!

Drive solutions from 0.03 kW to 5.5 kW

### GEARBOX

- Torque: 25 Nm ... 1,000 Nm
- Ratios:  
one-stage: 4.6 - 75.0  
two-stage: 6.13 - 418.0
- Versatile installation possibilities
- Completely enclosed and dust-tight
- Protection against water jets
- Lubrication change first after 25,000 hrs
- Low noise gearing

### MOTORS

- Power: 0.03 kW ... 5.5 kW
- Mains supply: 110 V ... 690 V, 50/60 Hz
- Enclosure: IP 54 (standard only for D04 and D05)  
IP 65 (standard)  
IP 66 - IP 68 (optional)
- Connection: Standard with CAGE CLAMP®\*

### OPTIONS

- Connecting with plug connectors
- With integrated inverter up to 5.5 kW
- IE3 up to 5.5 kW with ASM
- IE4 up to 11 kW with PMSM

### BRAKES

- Enclosure: IP 65 (standard)  
IP 66 and IP 68 (optional)
- Performance and application optimised brake range
- Maintenance friendly design

### STANDARDS

- ATEX
- CCC
- CE marking
- CSA
- EAC
- INMETRO
- ISO14001
- ISO9001
- OHSAS18001
- UL

### GENERAL


- Corrosion protection: C1 ... C5, IM2 based on DIN EN ISO 12944-5

# Worm Geared Motor

SERIES BS

## SPACE-SAVING!

Bauer Gear Motor supplies modern drive solutions for all industry sectors in which material must be moved.

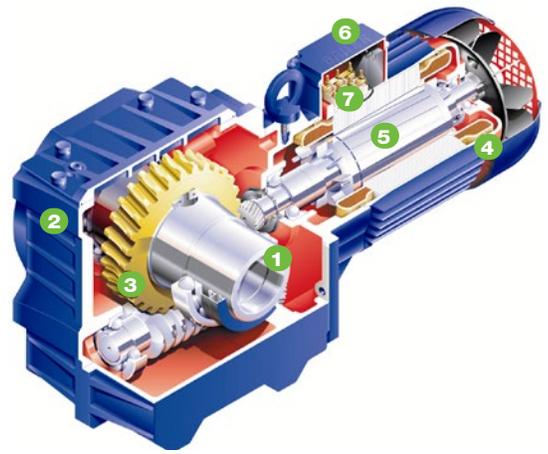

### 1 DESIGN

- As standard in 2-stage design, sizes BS02 and BS03 are 1-stage.
- Higher ratios available through attachment of a purpose built pre-stage or pre-connected gearbox.
- Many installation possibilities - foot or flange with single or double shaft end, hollow shaft with key or shrink disc design with torque arm - make these angular gear boxes an ideal space saving drive element.
- An economic solution for small torques and very small speeds.

### 2 HOUSING

- State-of-the-art gearbox housing designed for operation under harsh conditions.
- Compact closed housing is ideal for preventing lubricant loss and dirt build-up.
- High-tensile cast housing.
- Vibration-free housing, noise absorbent and resistant against chemical effects.
- The housing is machined in a single clamping process.
- Stator housings with casing and cooling fins are manufactured in one casting and ensure efficient heat dissipation.
- Motor housings, bearing covers and terminal boxes made of corrosion resistant aluminium die casting.

## BAUER GEAR MOTOR™

Regal Rexnord

[www.bauergears.com](http://www.bauergears.com)

Eberhard-Bauer-Str. 37  
73734 Esslingen

Tel.: +49 711 3518-0

[regalrexnord.com](http://regalrexnord.com)

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>. To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale>

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity. Regal Rexnord and Bauer Gear Motor are trademarks of Regal Rexnord Corporation or one of its affiliated companies. © 2011, 2026 Regal Rexnord Corporation, All Rights Reserved. MCF-P-7103-BGM-EN-US 02/26

### 3 GEAR WHEELS

- Gear wheels made of high-tensile and case-hardened steel.
- Highly wear-resistant through flank hardness of 60-62 HRC.
- Impervious to shock.
- Tooth flanks shaved, hobbled or ground.
- Strong, non-flexible pinion shafts and bearings guarantee exact tooth meshing.
- Worm wheels made of high-quality, wear-resistant bronze.

### 4 STATOR WINDING

- The stator winding is manufactured from high quality enamelled copper wire with state-of-the-art three layer insulation in the groove and winding head.
- The stator winding is impregnated with a damp-proof and tropical safe resin.
- The electrical design of the motor is adapted to the gearbox.

### 5 ROTOR

- Aluminium die cast cage rotor ensures a high reliability at high starting torques and low starting currents.
- Pull-up torques are mostly avoided.

### 6 TERMINAL BOX

- Spacious terminal box also completely sealed against dust and water spray.
- A large measure on safety through CAGE CLAMP®\* connection technology on the winding ends and motor connection.
- Handy terminals allow easy connection.

### 7 CAGE CLAMP

- CAGE CLAMP connection technology as standard.
- Optional with conventional terminal board



\* CAGE CLAMP is believed to be the trademark and/or trade name of WAGO and is not owned or controlled by Regal Rexnord Corporation or its affiliates.

RegalRexnord™