


Formsprag Turbine Starters

TURBINE CLUTCHES WITH CENTRIFUGAL
THROW-OUT SPRAG TECHNOLOGY




PRODUCT FEATURES

- Custom engineered designs
- AS 9100D/ ISO-9001:2015
- Centrifugal throw-out sprag technology
- Torque rating up to 3,000 Nm / 2,200 lb.ft
- Overrunning speed up to 15,000 rpm

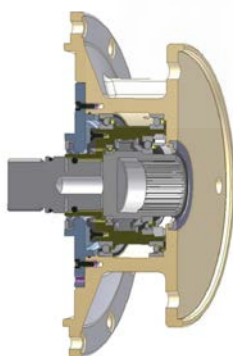

MODEL FTS-2500 TURBINE STARTER CLUTCH

- Drive torque 330 lb. ft
- Drive speed 4,800 RPM
- Overrunning speed 11,000 RPM
- Input flange OD 8"
- Output flange OD 11"
- Splined shaft included
- Length of 3.91"



MODEL FTS-800 TURBINE STARTER CLUTCH

- Drive torque 939 lb. ft
- Drive speed 4,080 RPM
- Overrunning speed 7,200 RPM
- Input square flange 10.3"
- Output flange OD 11"
- Length of 11.26"

Regal Rexnord

Contact us: 1-586-758-5000

formsprag.com | regalrexnord.com

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>. To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale>.

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity. Regal Rexnord and Formsprag Clutch are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2018, 2025 Regal Rexnord Corporation, All Rights Reserved. MCF-P-8624-FC-EN-US 08/25