

DISC RESURFACING TOOL GEN2 REMOVES WEAR & TEAR

YAW DISC REFURBISHMENT

DESCRIPTION


Service tool that completely renovates yaw discs after years of wear and tear. Traditional replacement of the discs is a time consuming and costly operation. The disc resurfacing tool minimizes service downtime and maintenance. It is specifically developed by Svendborg Brakes engineers.

SPECIAL FEATURES


- Refurbish damaged or worn yaw discs uptower
- Fully in-house developed tool and software
- Bolts directly onto turbine machine frame
- Can machine both sides of disc if needed
- Quick and short setup and machine time

SPECIFICATIONS

- Fits 90 & 120 style yaw brakes
- Power supply 400v 50Hz 16A
- Max power consumption 4Kw
- Feed rate max. 15mm per per second (normal yaw speed)
- Crane capacity to lift Disc Resurfacing Tool: 50kg
- Access to yaw section: 400mm x 500mm minimum

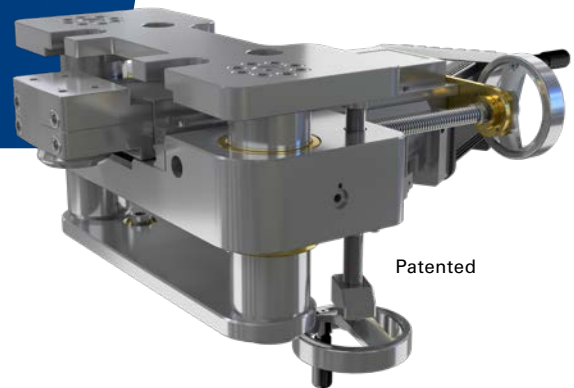

Before

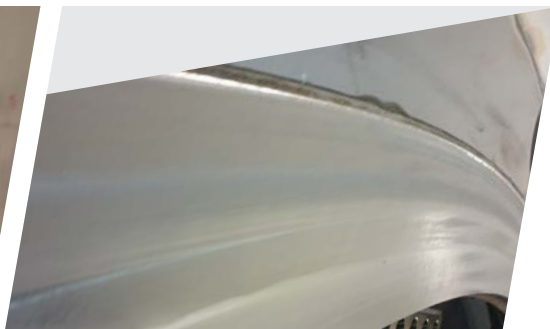

After

Regal Rexnord

regalrexnord.com/wind-solutions | svendborg-brakes.com

Jernbanevej 9

DK-5882 Vejstrup, Denmark

+45 63 255 255

**SVENDBORG
BRAKES™**

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale>.

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity. Regal Rexnord and Svendborg Brakes are trademarks of Regal Rexnord Corporation or one of its affiliated companies. © 2024, 2025 Regal Rexnord Corporation, All Rights Reserved. MCF-P-9067-SV-EN-US 09/25