Any of Warner Linear's K2 or K2x actuators can be provided with Hall effect or reed switches to be used by the customer to control actuator start/stopping & positioning. The Hall effect and reed switches are both non-contact, and use a magnet mounted on the screw inside the actuator tube to activate. Actuators can have 2-4 switches dependent on stroke length.

#### **Hall Effect**

The Hall effect switch is an NPN output/current sinking and requires a pull-up resistor to operate.

The Hall effect switches can also be configured to provide positioning information. A ten tooth wheel with two switches is used to provide an A and B pulse for position and direction along with a home switch and fully extended switch. This unit would be a "SO4" configuration.

## Hall Effect Switch Part Numbers Available, with K2 actuator product:

**S02H** - 2 end limit switches

# Hall Effect Switch Part Numbers Available, with K2 $\epsilon$ or K2x $\epsilon$ actuator product:

**S02H** - 2 end limit switches

**S03W** – 2 wheel position switches & home end limit switch

**S03H** - 2 end & 1 mid limit switches

**S04W** - 2 wheel position switches & 2 end limit switches


**S04H** - 2 end & 2 mid limit switches

Note 1: Consult factory for other options if needed

**Note 2:** Units with 3 switches can be no shorter than 4" and units with 4 switches can be no shorter than 6".

Hall Effect	
Supply Voltage:	4.75 to 24 VDC
Output:	Current sinking, max. of 25mA
Lead Wires:	24 AWG
Operating Temperature:	-40° C to +85° C
Protection:	Reverse polarity protected
Housing:	Rugged thermoplastic, sealed

### **SO2H Hall Effect**

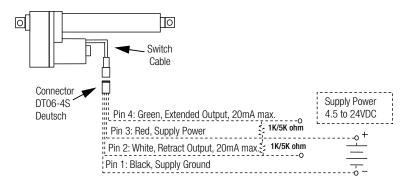

All dashed lines are customer supplied connections

#### Reed

The reed switch can only be provided on a K2E or K2XE actuator (adjustable unit). Switches can be selected as normally open (O) or normally closed (C).

### Reed Switch Part Numbers Available, with K2E or K2XE actuator product only:

**\$020** – 2 Normally Open, adjustable reed switches

S02C - 2 Normally Closed, adjustable reed switches

**\$030** – 3 Normally Open, adjustable reed switches

**S03C** - 3 Normally Closed, adjustable reed switches


**\$040** – 4 Normally Open, adjustable reed switches

**S04C** – 4 Normally Closed, adjustable reed switches

Note 1: Consult factory for other options if needed

**Note 2:** Units with 3 switches can be no shorter than 4" and units with 4 switches can be no shorter than 6".

Reed	
Supply Voltage:	Up to 200 VDC max. O switch Up to 175 VDC max. C switch
Switching Current:	1.2 Amps max. O switch 1.5 Amps max. C switch
Contact Rating:	10 Watts max. O switch 5 Watts max. C switch
Lead Wires:	24 AWG
Operating Temperature:	-40° C to +105° C
Housing:	Hermetically sealed



P-1581-WL 10/18 www.warnerlinear.com 61